


24V ULTRA THIN LINEAR TRACK

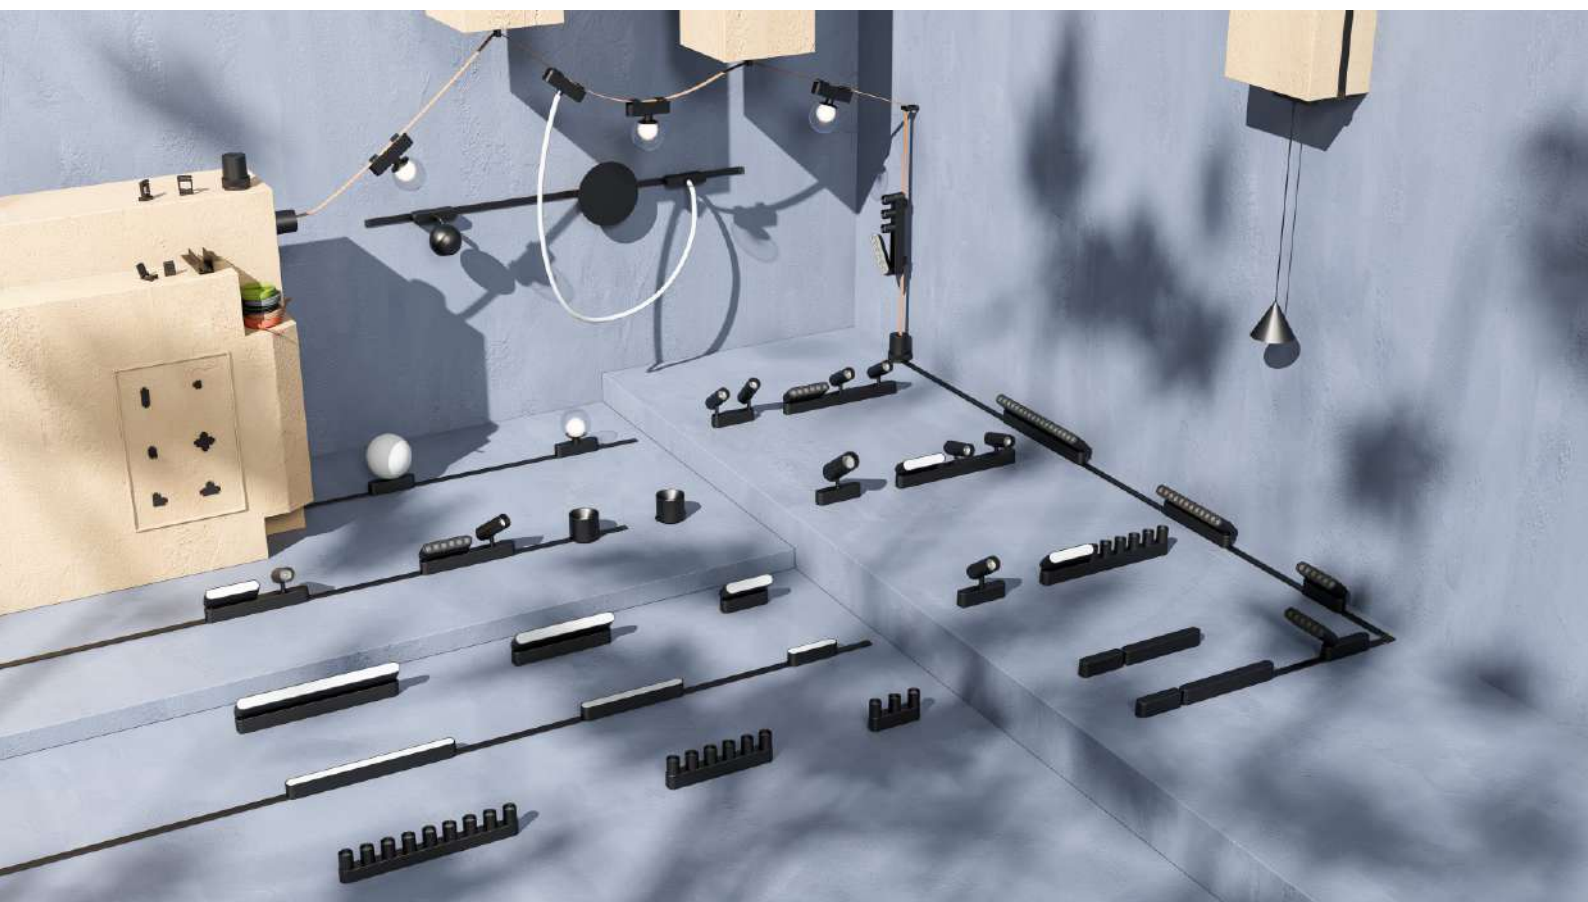

24V ULTRA THIN LINEAR TRACK

3 CCT: White Light/ Natural Light/ Yellow Light

Note: The power supply is equipped with conventional integrated power supply.



- 3000K WW
- 4000K NW
- 6000K CW



Smart control dimming and color adjustment: 2.4G/TUYA/ZigBee/MiJia
(Power supply centralized control).

24V ULTRA THIN LINEAR TRACK



Orange

Grey

Khaki

Black



3mm

16.5mm



10m

24V ULTRA THIN LINEAR TRACK


Accessories using woven tracks Connection options

Choose your preferred installation option according to your needs.



OBS-24V-PDYT

Large fixed nodes
Size: Ø60x69mm




Feature:

1. Track conductive conversion function.
2. Braided track steering installation.
3. Suitable for ceiling, wall and ground installation.



OBS-24V-PDSR

Braided track input module
Size: 31x22x22mm




Feature:

Braided track power supply module.



OBS-24V-PDDK

Braided track input module
Size: 31x22x22mm




Feature:

Lamp is connected to a Woven track.



OBS-24V-PDGK



Small fixed nodes
Size: 31x11x40mm



Feature:

Woven track holding adjuster bracket.

24V ULTRA THIN LINEAR TRACK

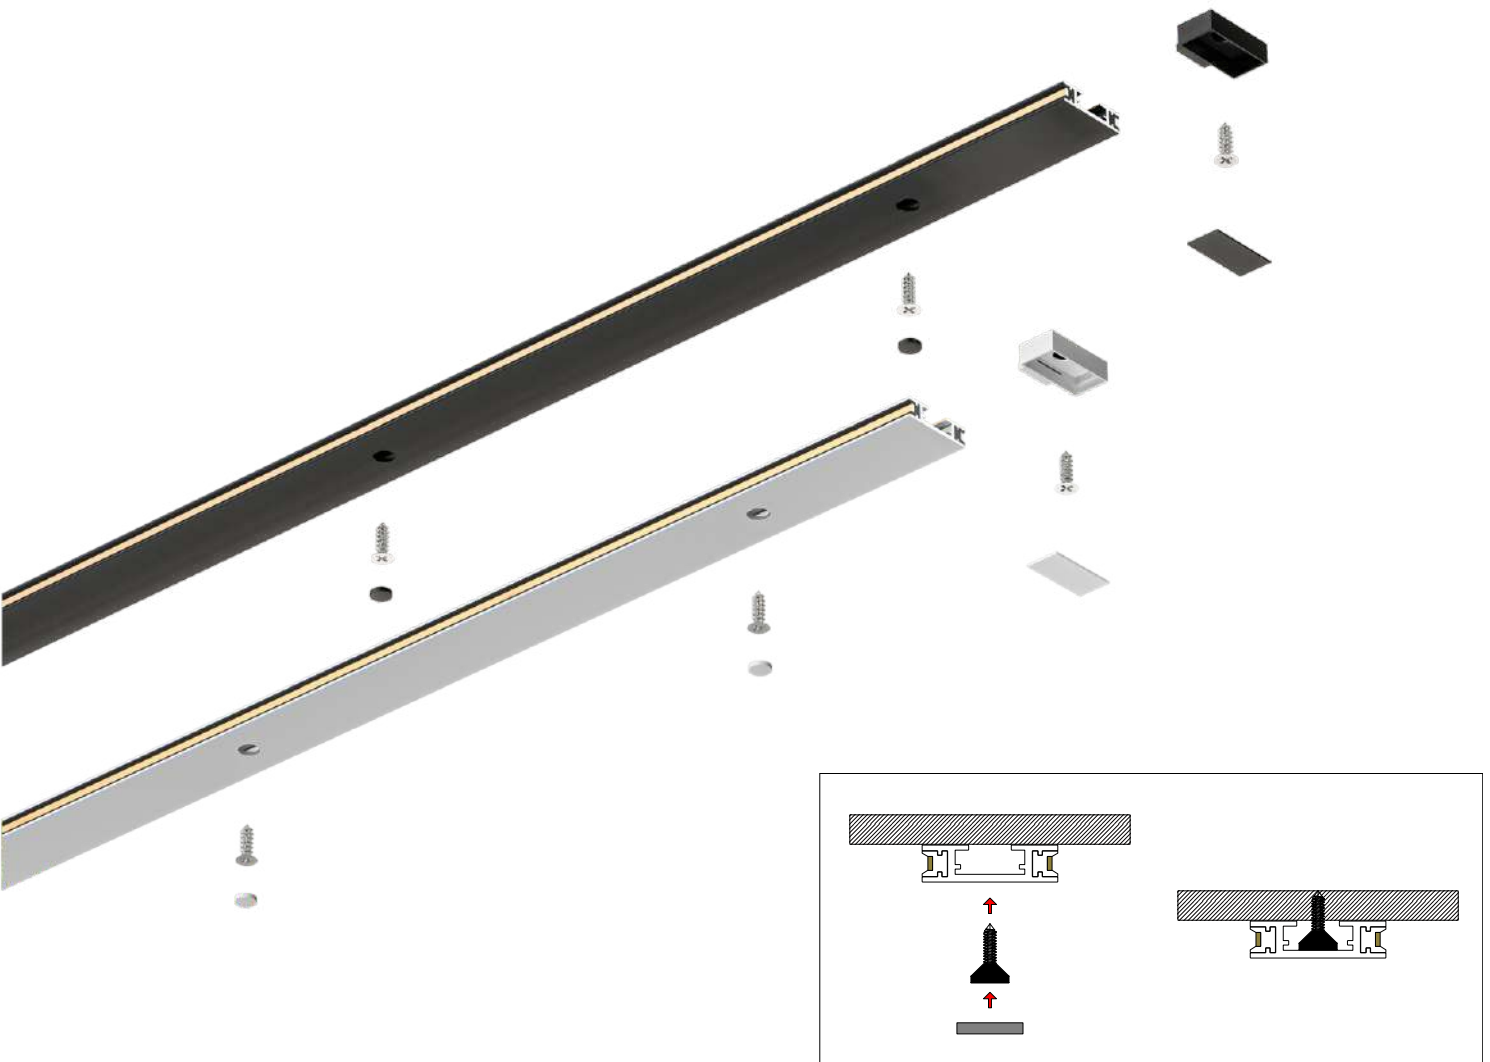

1000x16.5x4.5mm
2000x16.5x4.5mm

Watt: 100V/200W
Voltage: DC 24V
Color: Black/ White
Material: Aluminum+ Copper



* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

24V ULTRA THINLINEAR TRACK

Power Module



TPS16-BK100W24V
222x25x29mm
330x25x29mm



TPS16-BK100W24V-CE/WV
222x25x29mm
330x25x29mm



TPS16-BK100W24V-2.4G/TUYA
222x25x29mm
330x25x29mm



OBS-24VS-LE
54x25x49mm

Function: When an external transformer is used,
an input module is used to energize the track

Connectors



Straight Connect Module
OBS-24VS-I
36.5x16.5x4.5mm



L Connect Module
OBS-24VS-L
26.5x26.5x4.5mm



In&Out Connect Module
OBS-24VS-IN
21.5x21.5x4.5mm



T Connect Module
OBS-24VS-T
36.5x26.5x4.5mm



Cross Connect Module
OBS-24VS-X
36.5x36.5x4.5mm

24V THINS MAGNETIC TRACK WALL LAMP


Product Features

- Low voltage, high safety at 24V
- Woven track, Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.



Technical Specification

Model	WL16-BK6W24V
Watts	6W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø168x48 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	120°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

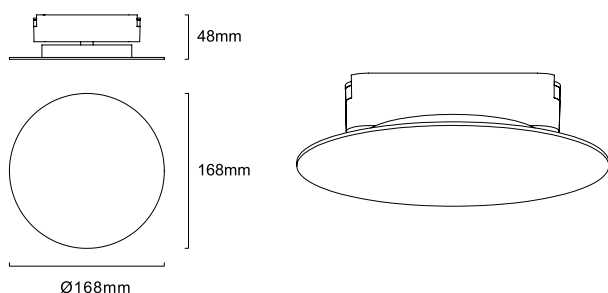

24V THINS MAGNETIC TRACK LIGHT


Product Features

- Low voltage, high safety at 24V
- Woven track, Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.



Technical Specification

Model	THD16-BK2X12W24V
Watts	12Wx2
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø43x110 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Bridgelux COB
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

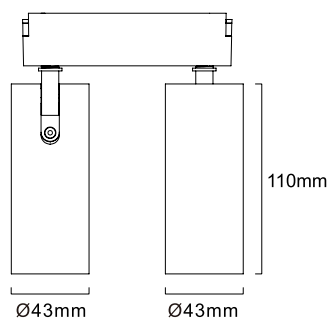

24V THINS MAGNETIC TRACK LIGHT


Product Features

- Low voltage, high safety at 24V
- Woven track, Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.



Technical Specification

Model	THS16-BK12W24V
Watts	12W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø43x110 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Bridgelux COB
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

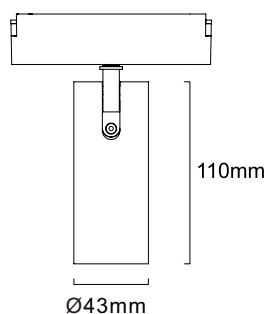

24V THINS MAGNETIC GRILLE LIGHT WALL WASHING


Product Features

- Low voltage, high safety at 24V
- Woven track, Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.



Technical Specification

Model	THG16WW-BK12W24V
Watts	12W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	222x25x78 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

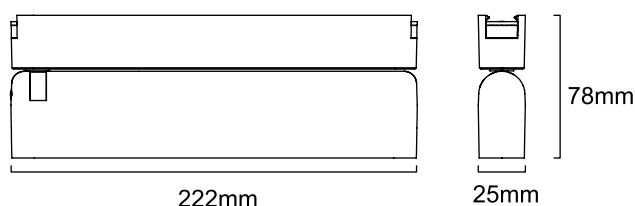

24V THINS MAGNETIC FLOODLIGHT WALL WASHING


Product Features

- Low voltage, high safety at 24V
- Woven track, Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.



Technical Specification

Model	THF16WW-BK18W24V
Watts	18W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	330x25x29 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

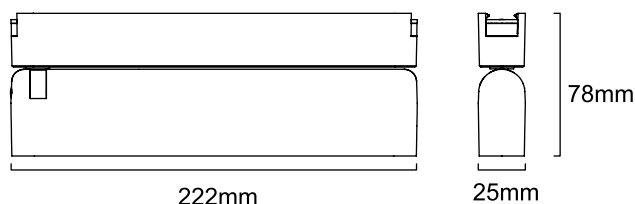

24V THINS MAGNETIC FROSTED GLASS BALL

Product Features

- Low voltage, high safety at 24V
- Woven track, Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Ind



Technical Specification

Model	FGB16-BK6W24V
Watts	6W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø150x175 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	110°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

