3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V ULTRA THINLINEAR TRACK

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V ULTRA THINLINEAR TRACK

3 CCT:White Light/ Natural Light/Yellow Light
Note: The power supply is equipped with conventional integrated power supply.

3000K WW
4000K NW
6000K CW

Smartcontrol dimming andcoloradjustment:2.4G/TUYA/ZigBee/MiJia
(Power supply centralized control).

IP 20

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V ULTRA THINLINEAR TRACK

Orange Gary Khaki Black



3mm

10m

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V ULTRA THINLINEAR TRACK

Accessories using woven tracks Connection options

Choose your preferred installation option according to your needs.

OBS-24V-PDYT
Large fixed nodes
Size:Ø60x69mm



Feature:
1. Track conductive conversion function.
2.Braided track steering installation.
3. Suitable for ceiling, wall and ground installation.

OBS-24V-PDSR
Braid track input module
Size:31x22x22mm



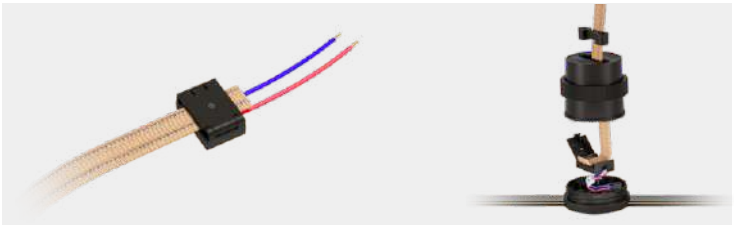

Fealure:
Braided track power supply module.

OBS-24V-PDDK
Braid track input module
Size:31x22x22mm



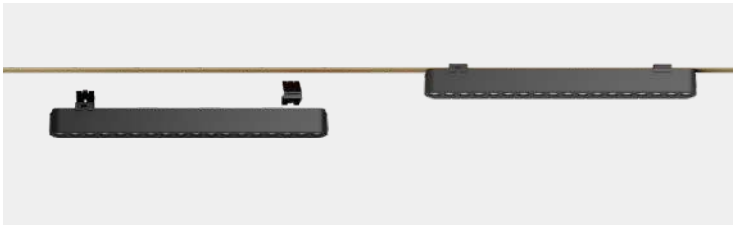

Feature:
Lamp is connected to a Woven track.

OBS-24V-PDGK
Small fixed nodes
Size:31x11x40mm



Feature:
Woven track holding adjuster bracket.

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V ULTRA THINLINEAR TRACK

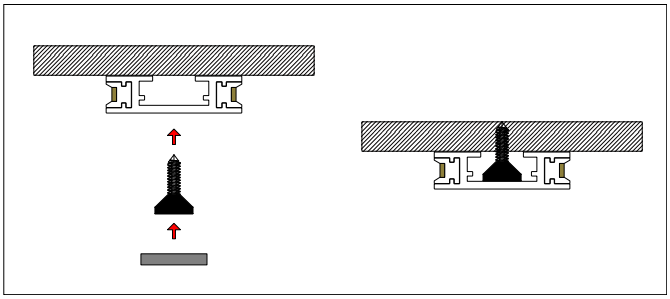



1000x16.5x4.5mm
2000x16.5x4.5mm

Watt:100V/200W
Voltage:DC 24V
Color:Black/ White
Material:Aluminum+ Copper

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V ULTRA THINLINEAR TRACK

Power Module

TPS16-BK100W24V
222x25x29mm
330x25x29mm

TPS16-BK100W24V-CE/WV
222x25x29mm
330x25x29mm

TPS16-BK100W24V-2.4G/TUYA
222x25x29mm
330x25x29mm

OBS-24VS-LE
54x25x49mm
Function: When an external transformer is used, an input module is used to energize the track

Connectors



Straight Connect Module
OBS-24VS-I
36.5x16.5x4.5mm

L Connect Module
OBS-24VS-L
26.5x26.5x4.5mm

In&Out Connect Module
OBS-24VS-IN
21.5x21.5x4.5mm



T Connect Module
OBS-24VS-T
36.5x26.5x4.5mm



Cross Connect Module
OBS-24VS-X
36.5x36.5x4.5mm

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V THINS MAGNETIC TRACK WALL LAMP

Product Features

- Low voltage, high safety at 24V
- Woven track， Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.

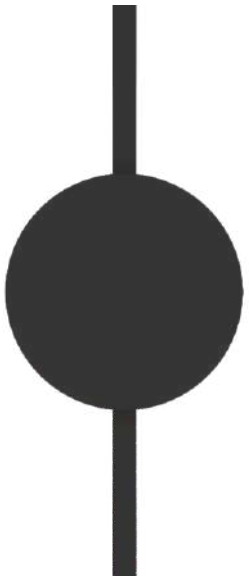

Technical Specification

Model	WL16-BK6W24V
Watts	6W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø168x48 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	120°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

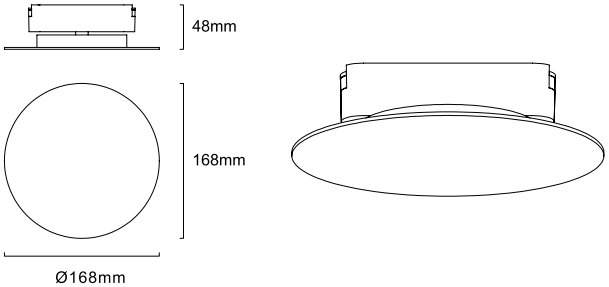

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V THINS MAGNETIC TRACK LIGHT

Product Features

- Low voltage, high safety at 24V
- Woven track， Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.

Technical Specification

Model	THD16-BK2X12W24V
Watts	12Wx2
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø43x110 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Bridgelux COB
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC



* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V THINS MAGNETIC TRACK LIGHT

Product Features

- Low voltage, high safety at 24V
- Woven track， Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.

Technical Specification

Model	THS16-BK12W24V
Watts	12W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø43x110 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Bridgelux COB
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC



* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V THINS MAGNETIC GRILLE LIGHT WALL WASHING

Product Features

- Low voltage, high safety at 24V
- Woven track， Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.

Technical Specification

Model	THG16WW-BK12W24V
Watts	12W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	222x25x78 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

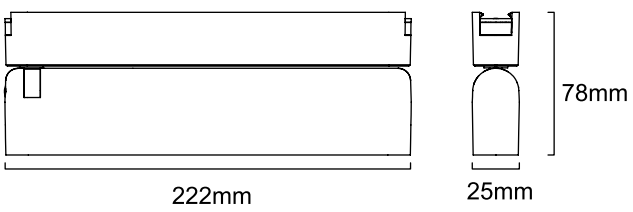

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V THINS MAGNETIC FLOODLIGHT WALL WASHING

Product Features

- Low voltage, high safety at 24V
- Woven track， Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Indoor etc.

Technical Specification

Model	THF16WW-BK18W24V
Watts	18W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	330x25x29 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	24°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC

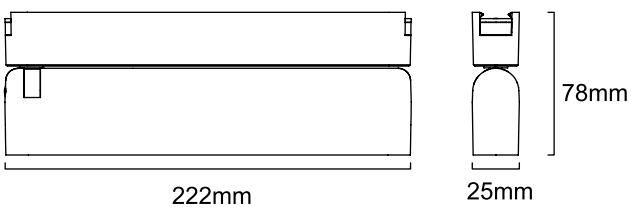

* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.

3A AUSTRALIA LIGHTING
E-mail: 3alighting@gmail.com

24V THINS MAGNETIC FROSTED GLASS BALL

Product Features

- Low voltage, high safety at 24V
- Woven track， Surface mounted track.
- A safer safety lock design is used.
- Thins magnetic line track.
- For museums,galleries,showroom,Shop,Office.Residential, Inc

Technical Specification

Model	FGB16-BK6W24V
Watts	6W
Input Voltage	DC 24V
Colour Temp	3000K/4000K/6000K
CRI	≥90
Size	Ø150x175 mm
SDCM	<6
IP Grade	IP20
Beam Angle (°)	110°
LED Chip	Osram 2835
Dimmable	YES
Housing Colour	Black
Material	Aluminum+PC



* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.