

## LUNOS

### Recessed & Surface mounted LED Ceiling Light Instruction Manual



Installations must be performed by a qualified Electrical Contractor in accordance with the current wiring standard AS/NZS 3000.  
**3 YEAR REPLACEMENT WARRANTY\***  
with Proof of purchase and electrical installation certificate.


#### CARE and WARRANTY

Before cleaning the fixture, disconnect it if necessary from other components, do not use aggressive cleaning agents. The fixture has been carefully checked for defects. If you do find a quality or operational issue, please advise your reseller together with your proof of purchase and installation certificate. We reserve the right to make technical modifications.


#### Specification

Item Number	LUNOS OY23.3C3D	LUNOS OY30.3C3D	LUNOS OY40.3C3D
Input Voltage	220-240V ~ 50Hz		
Watt	9W-12W-18W	12W-18W-24W	18W-24W-30W
Lumen	800Lm - 1050Lm - 1550Lm	1130Lm - 1760Lm - 2150Lm	1540Lm -1990Lm - 2480Lm
CCT	3000K-4000K-5000K		
Dimmable	TRIAC		
IP Rating	IP44		
Length (mm)	230mm	300mm	400mm
Width (mm)	230mm	300mm	400mm
Height (mm)	25mm	25mm	25mm
Cutout(mm)	55-200mm	55-280mm	55-280mm
Installation	Surface mounted & Recessed		

#### Dimension

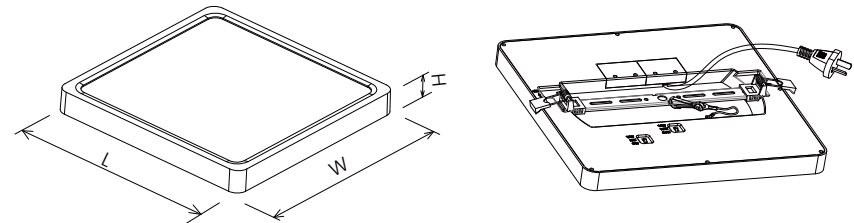

#### Accessories

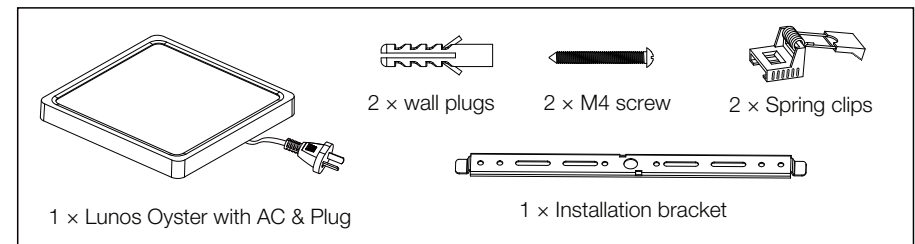

(The product must be installed by a licensed electrician)

### Installation - Surface mounted

- Turn mains power OFF.
- Remove installation bracket from the lamp body.
- Mount the bracket using screws provided (and raw plugs if necessary).
1. Select desired colour temperature & power via switch.  
2. Insert plug to socket.
- Mount ceiling light into the bracket, make sure the oyster is securely locked.

### Installation - Recessed

Cut-out  
 a) OY23 Min.55 - Max.220mm  
 b) OY30 Min.55 - Max.280mm  
 c) OY40 Min.55 - Max.280mm

1. Mount the spring clips in the bracket.  
2. Mount the bracket into the light and make sure the oyster is locked securely.
- 2 Cut suitable size hole in the ceiling. Refer to the minimum and maximum hole sizes for a) OY23 b) OY30 c) OY40
- 3 Mount ceiling light into the bracket, Make sure the oyster is locked securely.
- 4 Lift the spring clips up and insert light fitting into the ceiling.
- 5 Release the spring and make sure the LED downlight is firmly in place.
- 6 Turn mains power ON.

Installation must be performed by a qualified Electrical Contractor in accordance of the current wiring standard AS/NZS3000.  
**3 YEAR REPLACEMENT WARRANTY\***  
 with Proof of purchase and electrical installation certificate.