


Magnetico track lighting system

NEW 2025

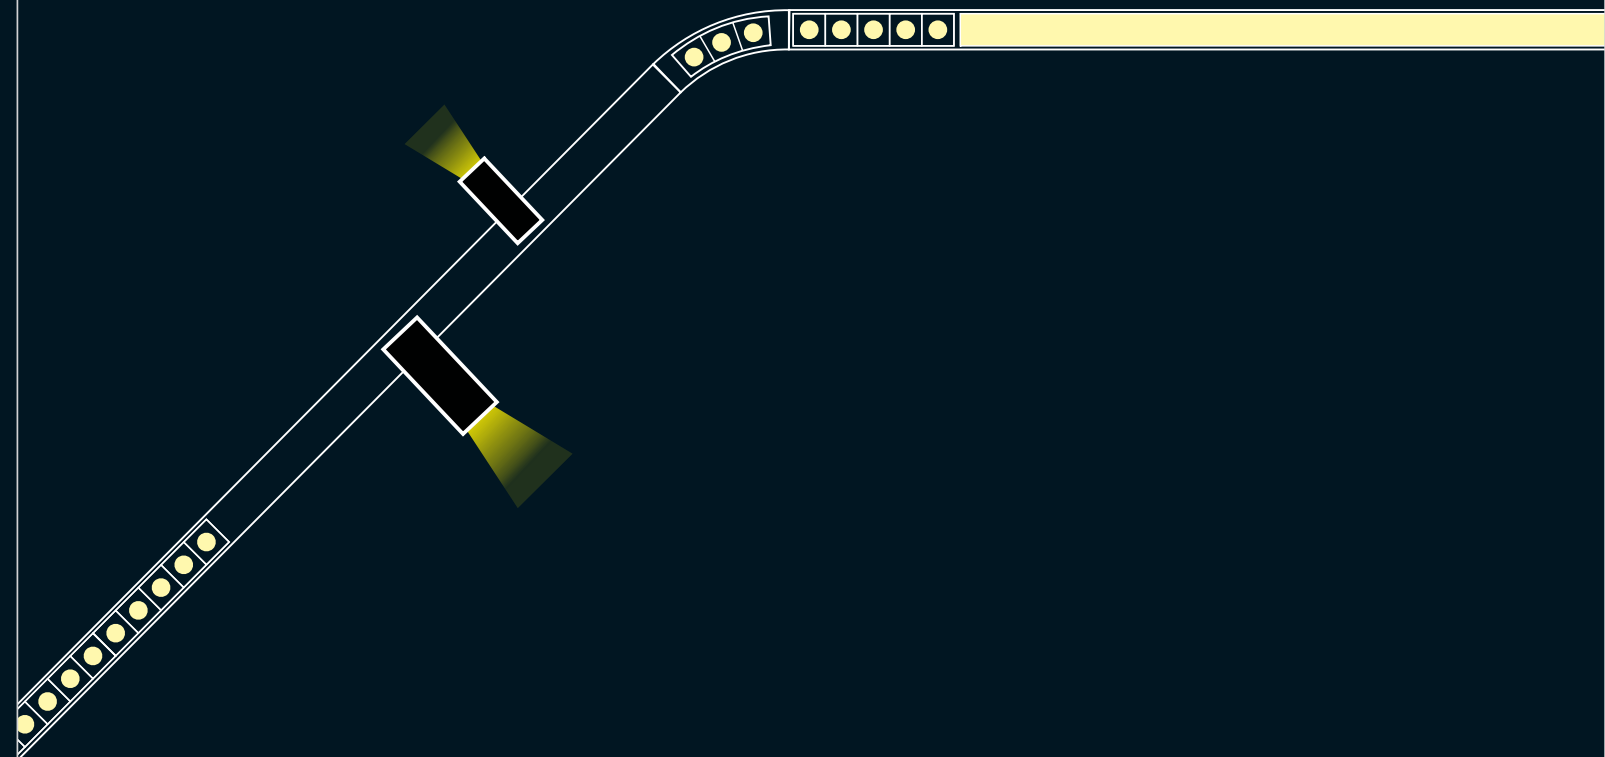

LIGHTING THAT OUTPERFORMS
SINCE 1998


Contents

STANDARD	11-26
Track	11-14
Accessories	15
Dot	16-17
LINEAR	18-20
SCCOP & FOLD	21-24
Wall washer	25
Out	26

ADAPTERS	27-50
Spot	29-36
Halo	37-42
Pendant	43-48
Global	49-50


MINI	51-60
Track	51-54
Dot	55-56
Linear	57-58
Fold	59-60

CURVY	61-66
Track	61-64
Dot	65
Linear	66

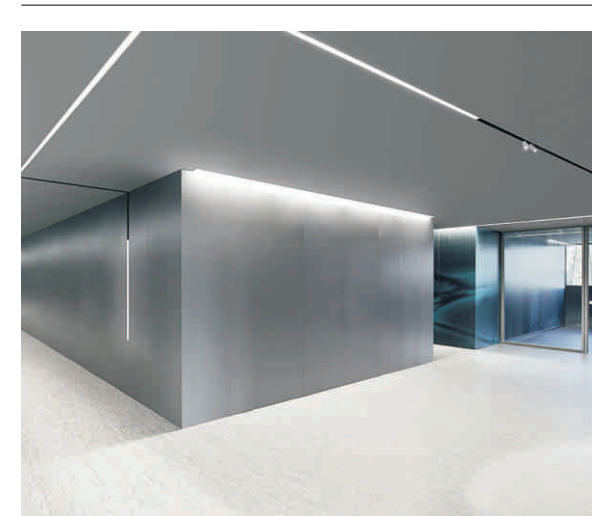

Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+/-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

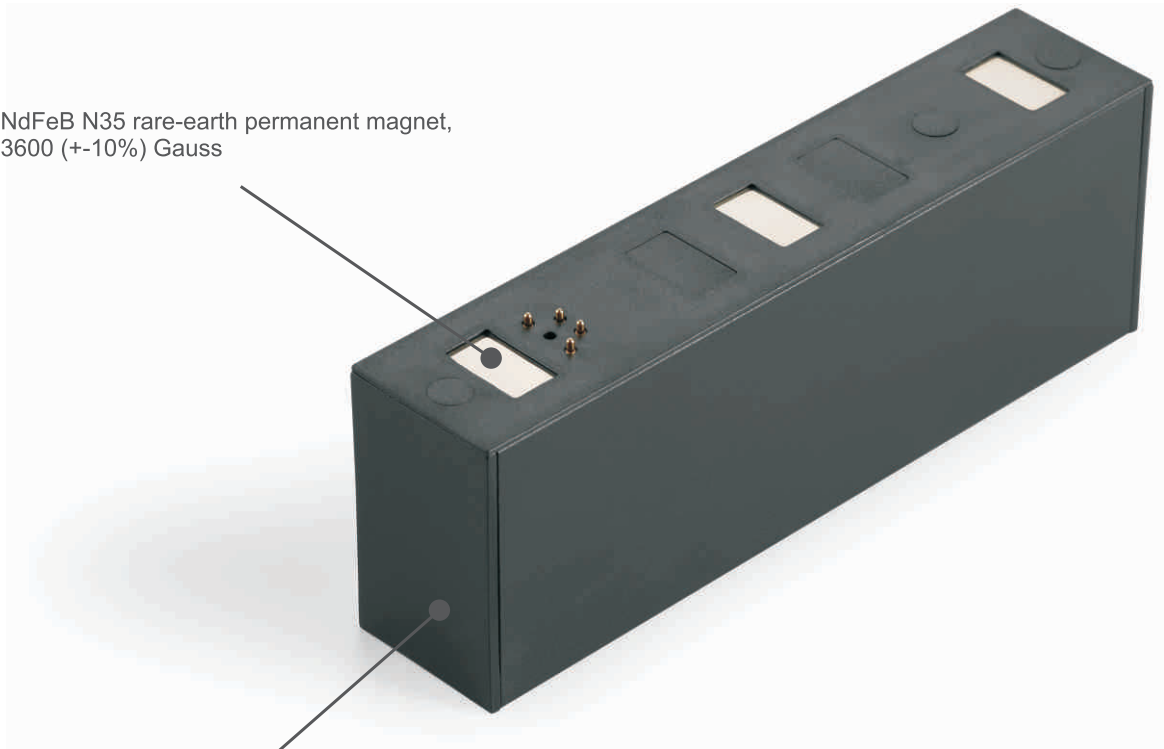



Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

Research & Developments

We are constantly searching & testing technologies to offer the best natural lighting in our fixtures.

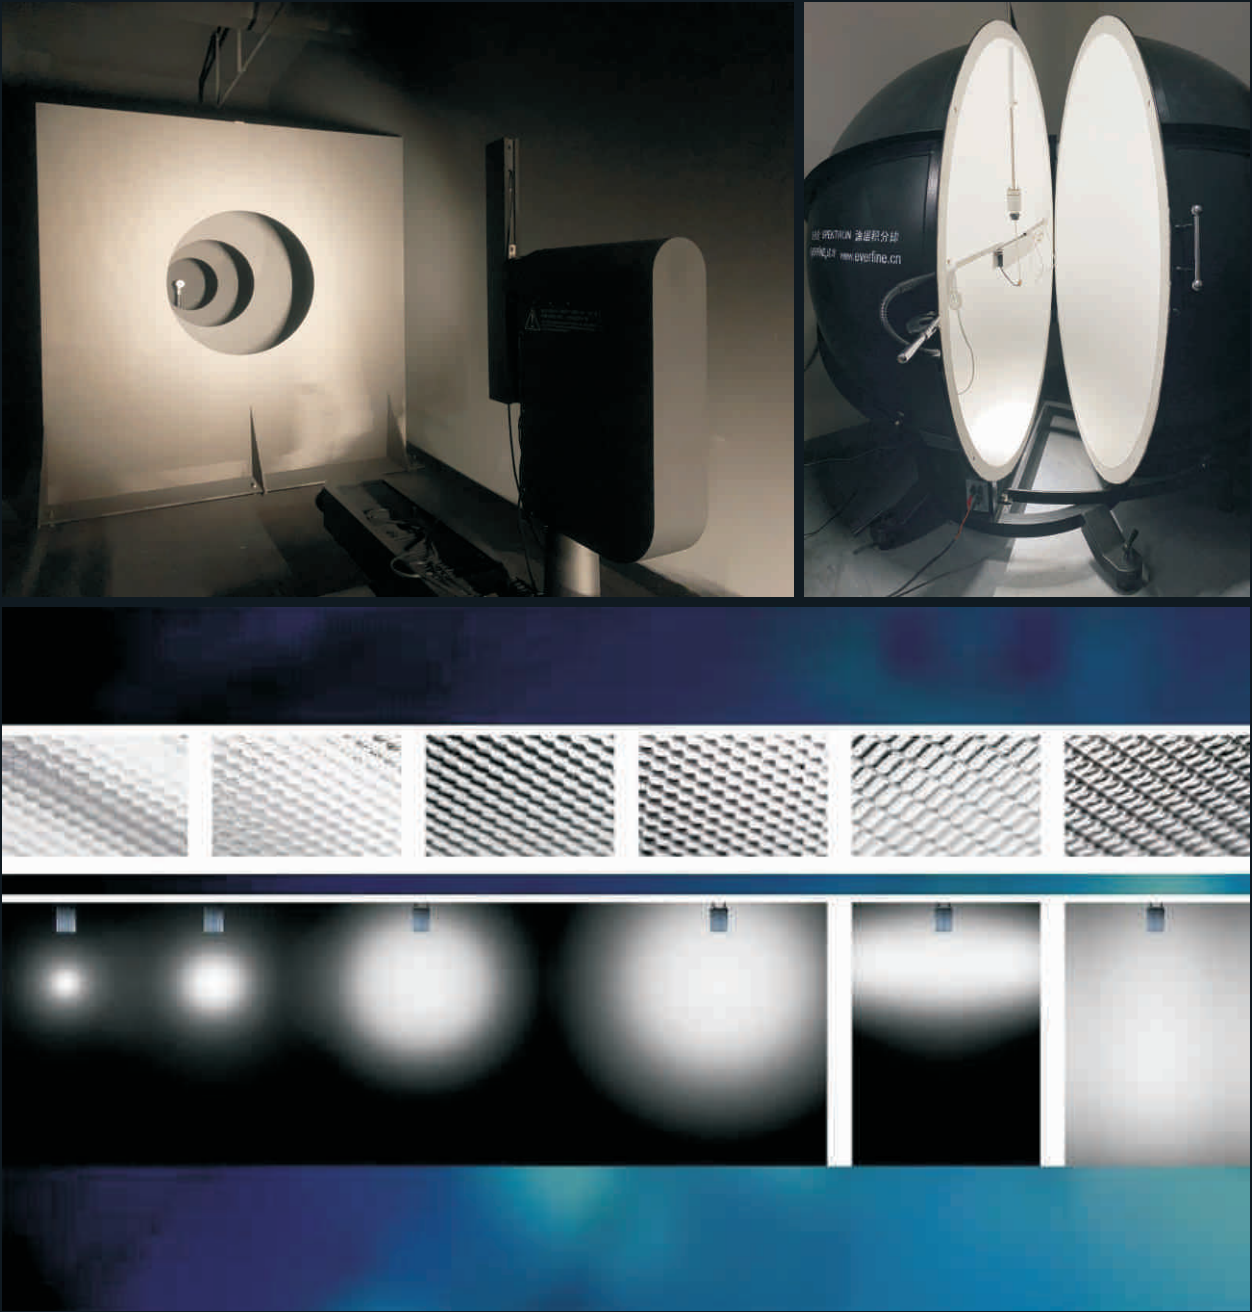

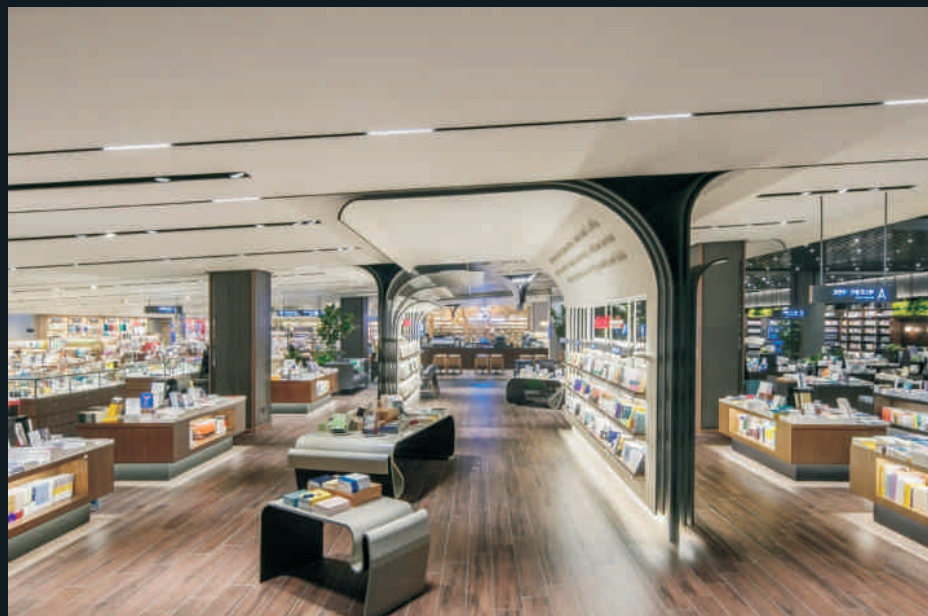


Thanks to the convenient structure our systems are used in various spaces from commercial to residential settings.

TWO DESIGNS


Two sizes of magnetic system to fit all your spaces.

The 39 mm tracks offer lighting fixtures that have higher power & luminance to fit spaces with higher ceilings.

The 27.5 mm tracks are our newest slimmer editions offering seamless designs that look great in residential spaces.




39mm



Made to Order

Input Voltage:

DC 24V Constant Voltage

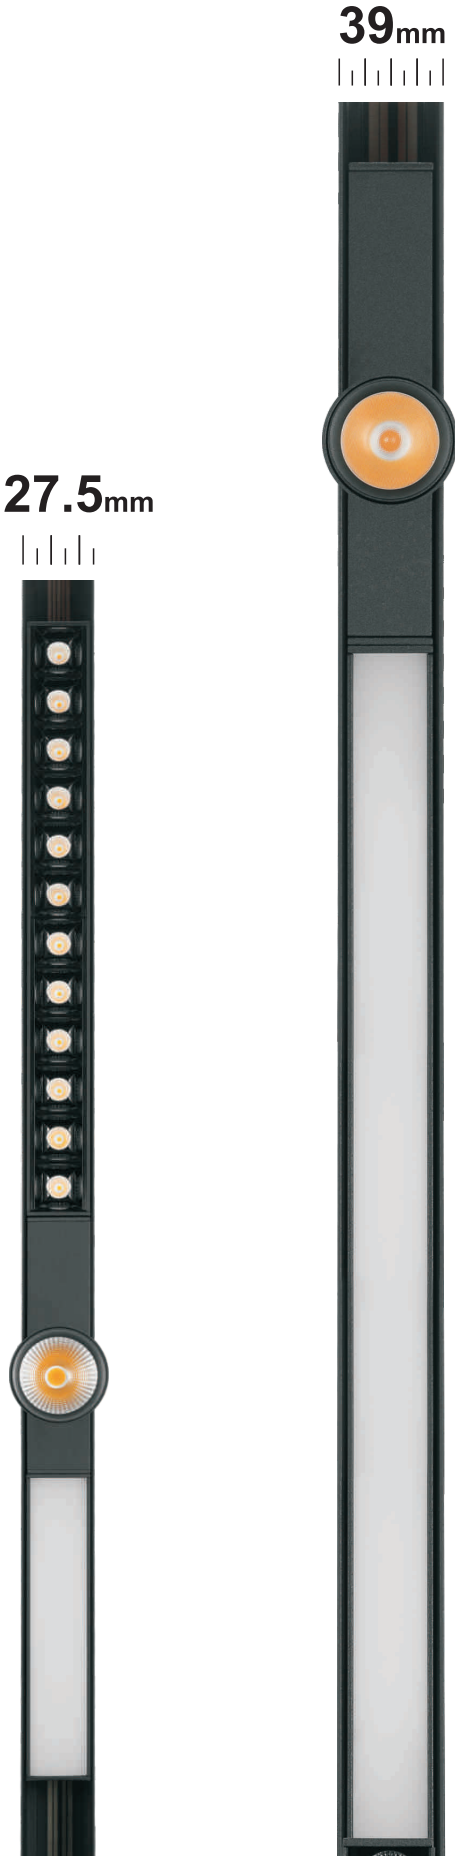

27.5 mm

39 mm

27.5 mm

39 mm

27.5 mm



39 mm


Various Installations:

surface/recessed/pendant

Black White Golden Black bronze


Seamless connection

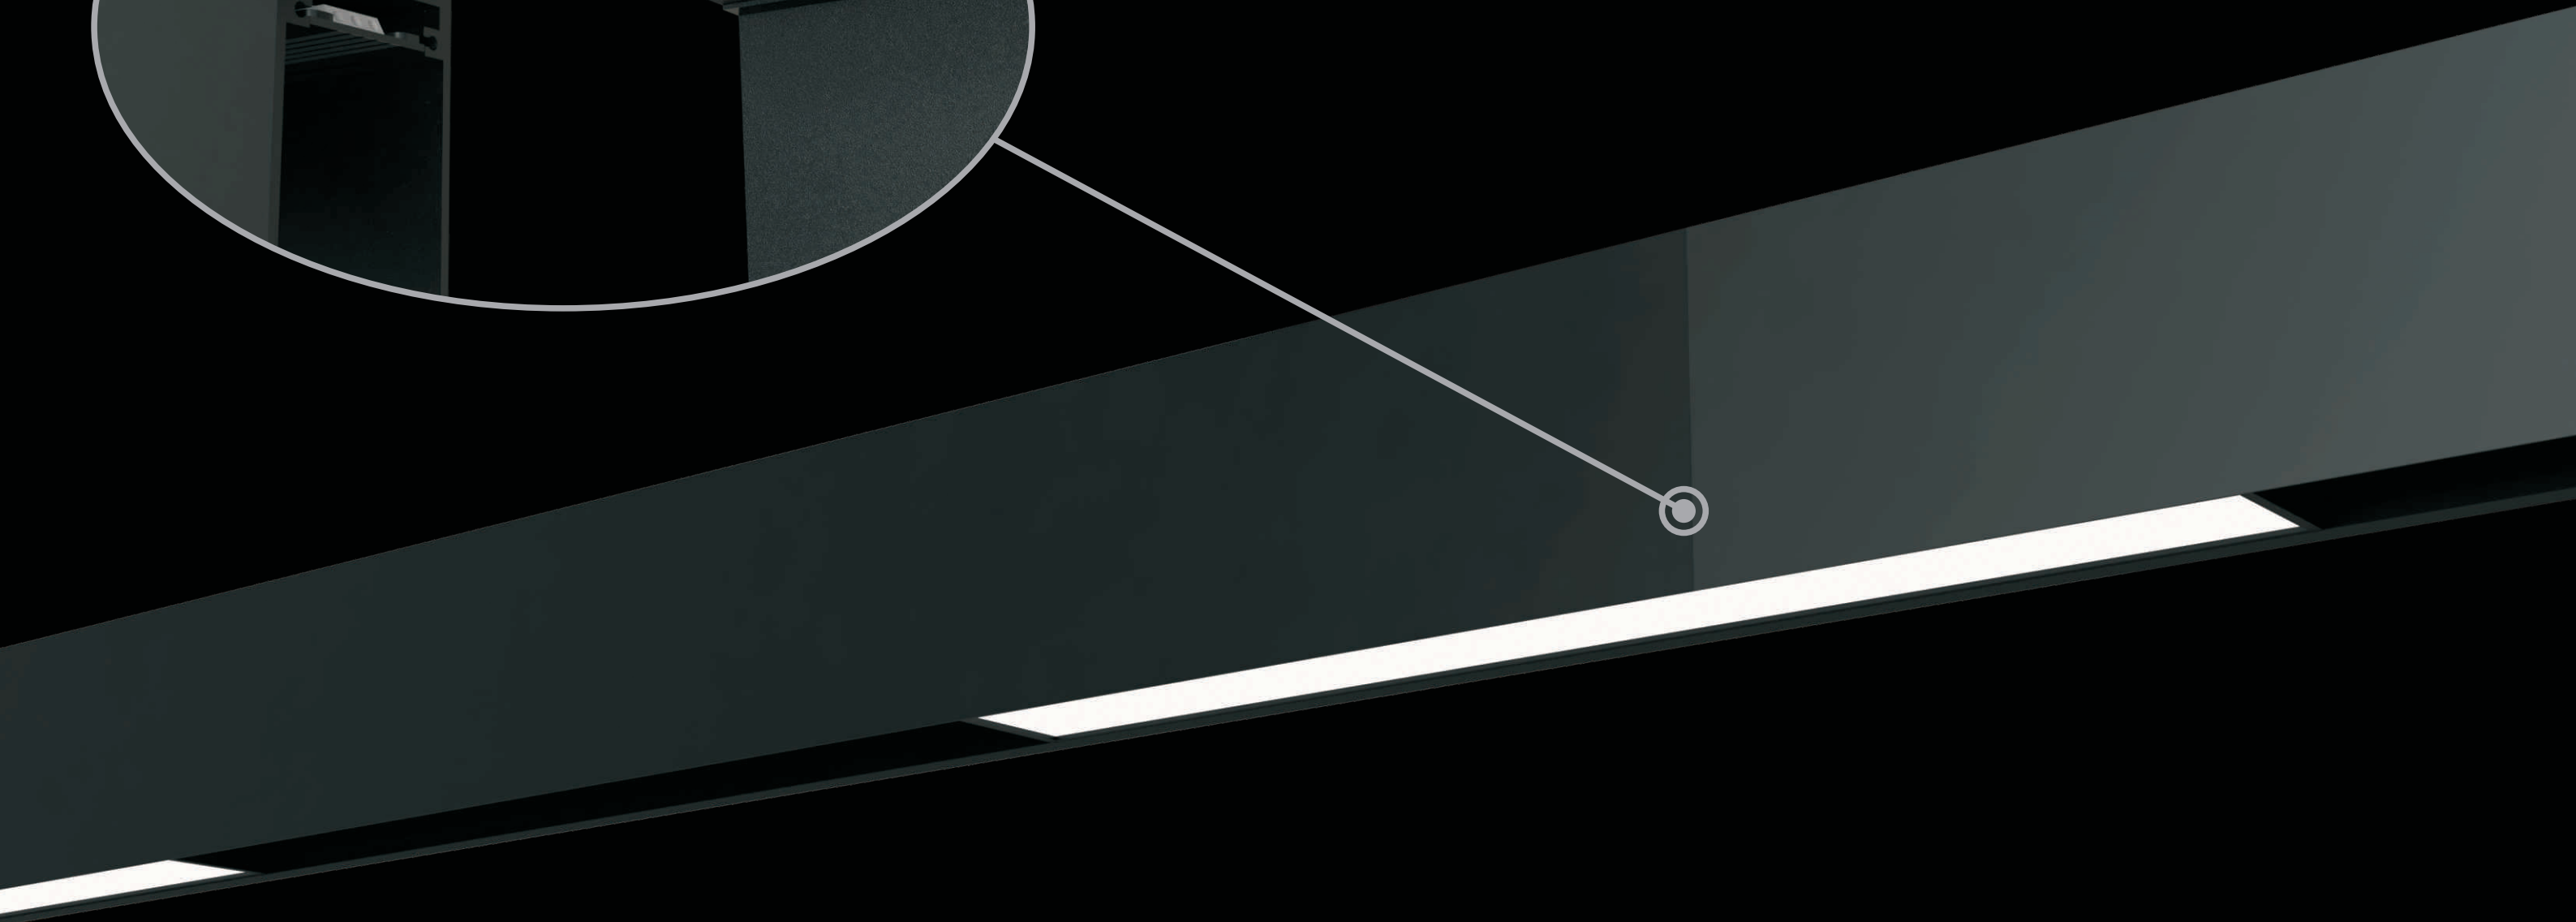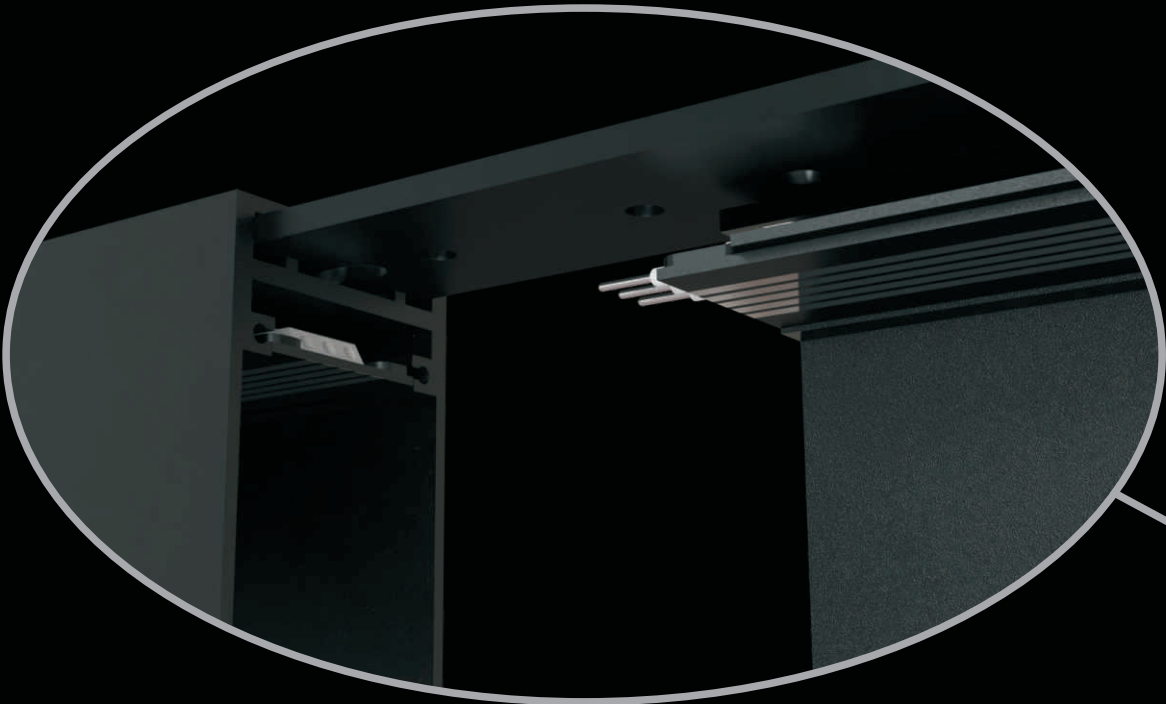

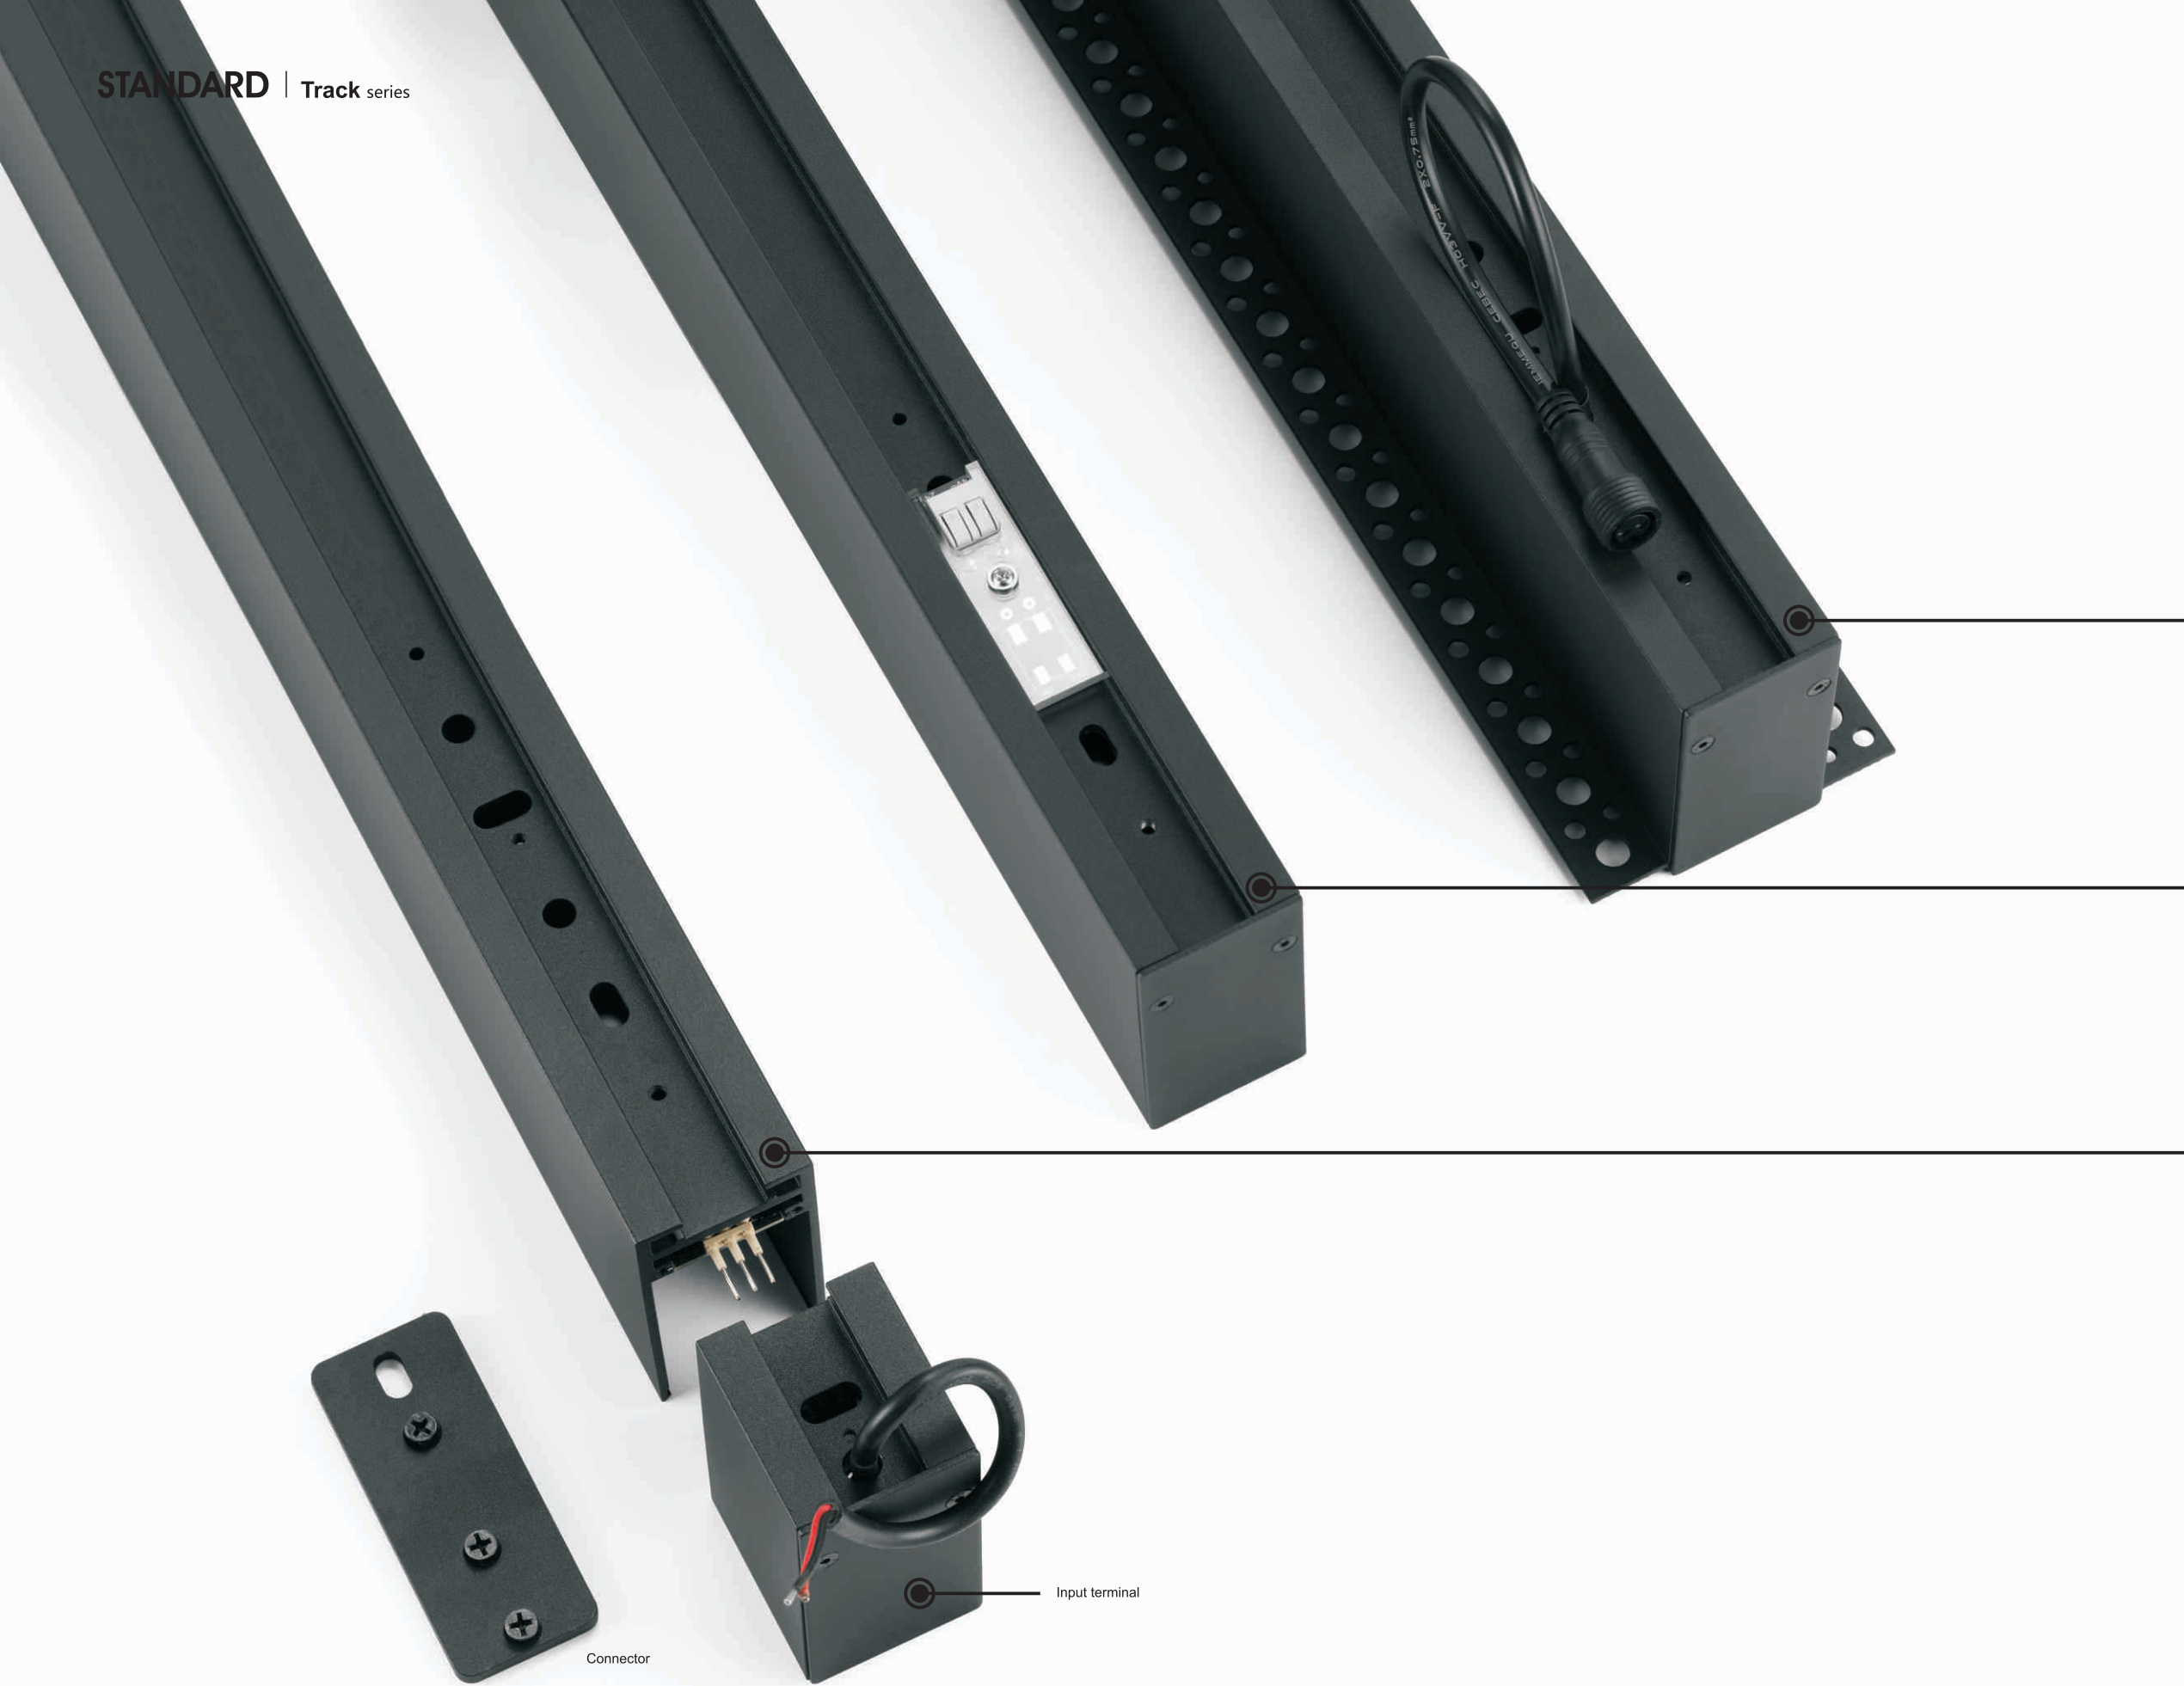

STANDARD

series



- Recessed



- Surface
- Pendant
- Recessed



- TrackS-A**
- Surface
 - Pendant
 - Recessed




US standard






Model	Power	Install	Length
UMAG-TRAK-1M	200W max	Surface/Pendant/Recessed	1000mm
UMAG-TRAK-2M	200W max	Surface/Pendant/Recessed	2000mm
UMAG-TRAK-3M	200W max	Surface/Pendant/Recessed	3000mm

☐ Sandy Black ☐ Sandy White ☒ Golden ☒ Black bronze

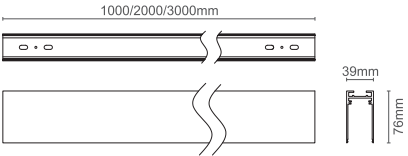

Model	Power	Install	Length
UMAG-TRKR-2M	200W max	Recessed	2000mm
UMAG-TRKR-3M	200W max	Recessed	3000mm

☐ Sandy Black ☐ Sandy White ☒ Golden ☒ Black bronze



CORNER - For Recessed Installation


UMAG-L-JOINER-BLK/WH

☐ Sandy Black ☐ Sandy White



UMAG-INCORNER-BLK/WH

☐ Sandy Black ☐ Sandy White




UMAG-OUTCORNER-BLK/WH

☐ Sandy Black ☐ Sandy White



UMAG-T-JOINER-BLK/WH

☐ Sandy Black ☐ Sandy White




UMAG-45D-CORNER-BLK/WH

☐ Sandy Black ☐ Sandy White



UMAG-CROSS-CORNER-BLK/WH


☐ Sandy Black ☐ Sandy White



CORNER - For Recessed Installation


UMAG-L-RSJOINER-BLK/WH

☐ Sandy Black ☐ Sandy White




UMAG-INCORNER-RS-BLK/WH

☐ Sandy Black ☐ Sandy White




UMAG-OUTCORNER-RS-BLK/WH

☐ Sandy Black ☐ Sandy White



UMAG-T-RS-JOINER-BLK/WH

☐ Sandy Black ☐ Sandy White



Power Feed - For Recessed Mounted Installation

UMAG-INPUT-TERMINAL


☐ Sandy Black ☐ Sandy White



Power Feed - For Recessed Mounted Installation


UMAG-R-INPUT-TERMINAL

☐ Sandy Black ☐ Sandy White




ACCESSORIES


UMAG-RS-BRACKET BLK/WH

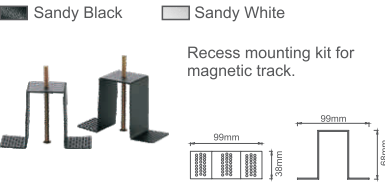

UMAG-CANOPY-BLK/WH

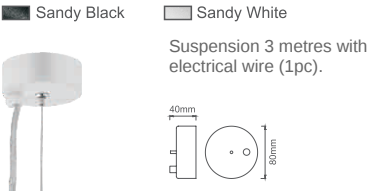


UMAG-CANOPY-BLK/WH-2

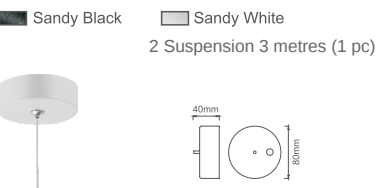

UMAG-TRK-CONNECTOR




UMAG-COVERPLATE

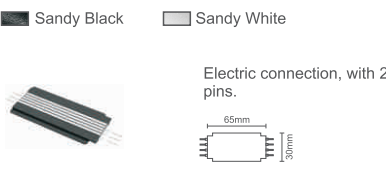


UMAG-SM-BRACKET-BLK/WH




UMAG-TRAK-COVER

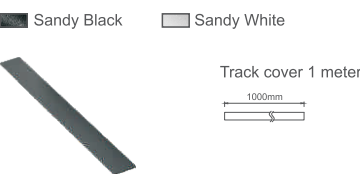


UMAG-TRACK BOX

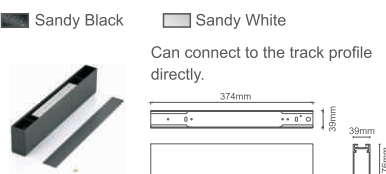

UMAG-DRIVER-BOX

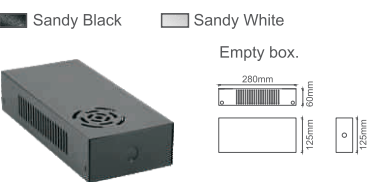

UMAG-DEADEND-BLK



UMAG-2PINJOINER (Made to order)



UMAG-3PINJOINER



UMAG-DOT1BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	120Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

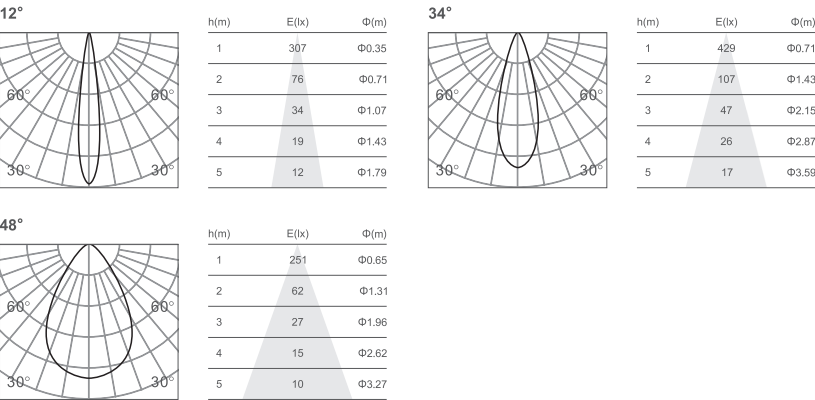

UMAG-DOT3BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	380Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

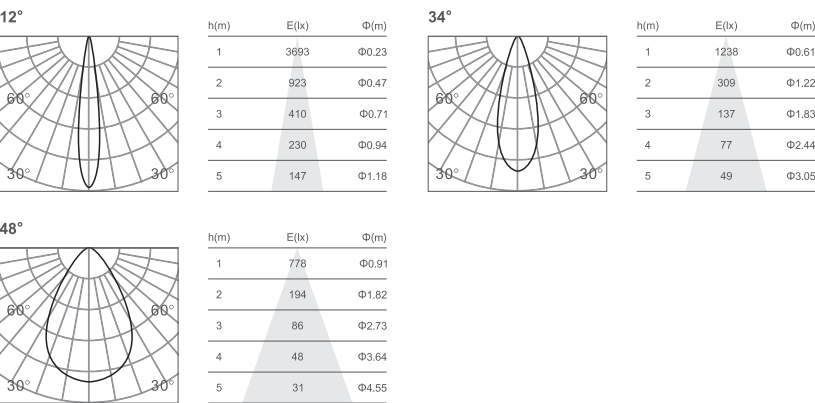




UMAG-DOT6BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	

 Sandy Black  Sandy White


LIGHT DISTRIBUTION




h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29



UMAG-DOT12BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



h(m)	E(lx)	Φ(m)
1	3197	Φ0.84
2	799	Φ1.69
3	355	Φ2.54
4	199	Φ3.39
5	127	Φ4.24



UMAG-BALANCE-4-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		



 Sandy Black  Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



UMAG-BALANCE-7-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99





UMAG-BALANCE-13-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	426	Φ2.51
2	106	Φ5.02
3	47	Φ7.53
4	26	Φ10.04
5	17	Φ12.55



UMAG-BALANCE-39-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	2850Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	889	Φ2.23
2	222	Φ4.46
3	98	Φ6.69
4	55	Φ8.92
5	35	Φ11.15



UMAG-BALANCE-26-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	1900Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	479	Φ2.65
2	119	Φ5.30
3	53	Φ7.95
4	29	Φ10.60
5	19	Φ13.25





UMAG-SCOOP4-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	3683	Φ0.23
2	923	Φ0.47
3	410	Φ0.71
4	230	Φ0.94
5	147	Φ1.18



h(m)	E(lx)	Φ(m)
1	1238	Φ0.61
2	309	Φ1.22
3	137	Φ1.83
4	77	Φ2.44
5	49	Φ3.05



h(m)	E(lx)	Φ(m)
1	778	Φ0.91
2	194	Φ1.82
3	86	Φ2.73
4	48	Φ3.64
5	31	Φ4.55



UMAG-SCOOP16-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



h(m)	E(lx)	Φ(m)
1	3197	Φ0.84
2	799	Φ1.69
3	355	Φ2.54
4	199	Φ3.39
5	127	Φ4.24



UMAG-SCOOP8-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29



UMAG-FOLD4-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



UMAG-FOLD8-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99



UMAG-FOLD16-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	234	Φ2.47
2	58	Φ4.95
3	26	Φ7.43
4	14	Φ9.90
5	9	Φ12.38

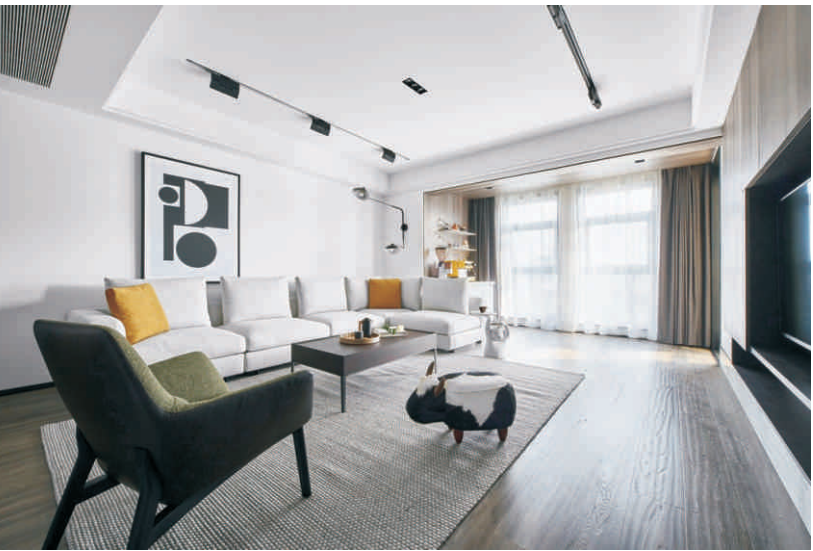



UMAG-WASHER13-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80 > 90	< 3	2700K 3000K 4000K	wallwasher	380Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

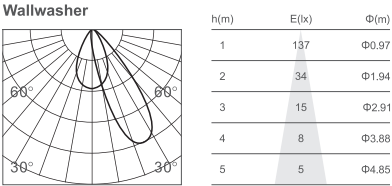

UMAG-WASHER27-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	wallwasher	880Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

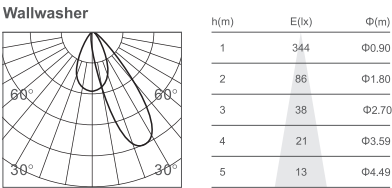

UMAG-BALANCE-OUT13-BLK/WH





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

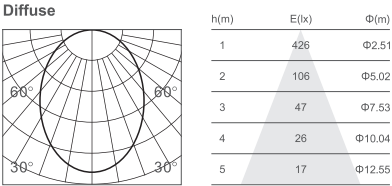

UMAG-BALANCE-OUT16-BLK/WH





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	1550Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

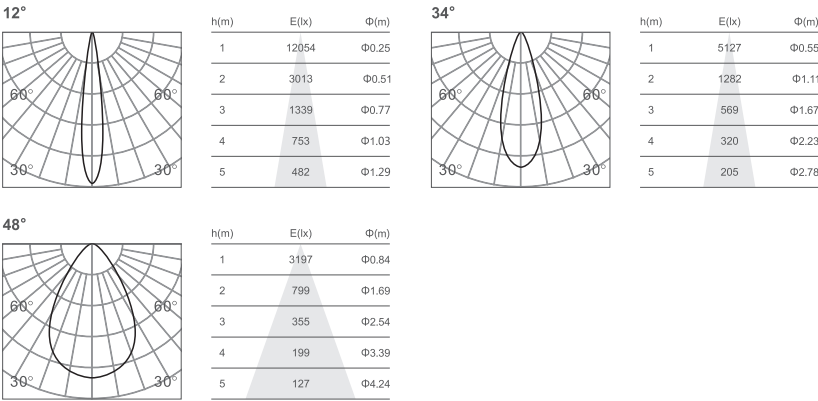

ADAPTERS

3 Adapters

Same spotlight heads + 3 kinds of adapters = 3 different system

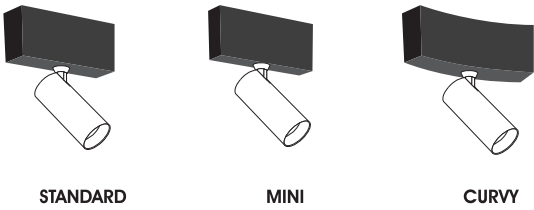

Spot



Pendant





UMAG-SPOT5-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

 Sandy Black  Sandy White  Golden

LIGHT DISTRIBUTION

3000K 90Ra

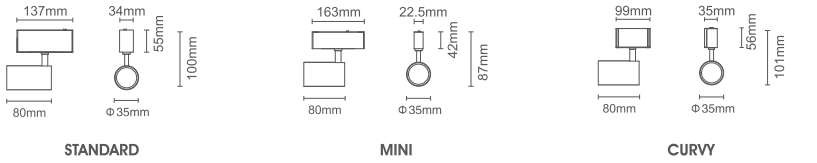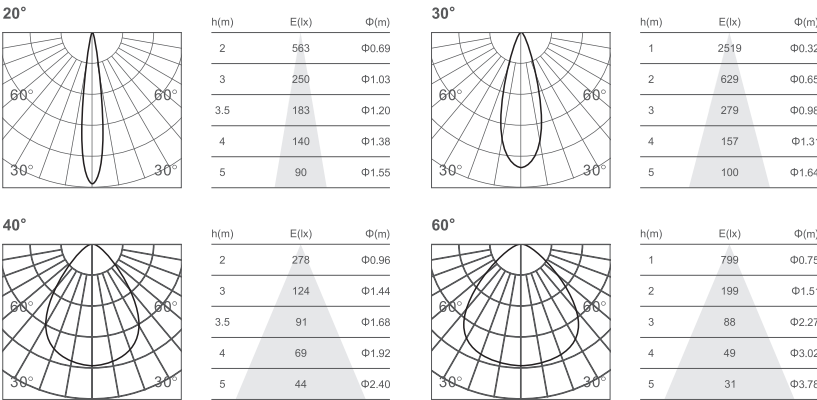

UMAG-SPOT2x5-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2x5W	> 80	< 3	2700K	20°	880Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

 Sandy Black  Sandy White  Golden

LIGHT DISTRIBUTION

3000K 90Ra

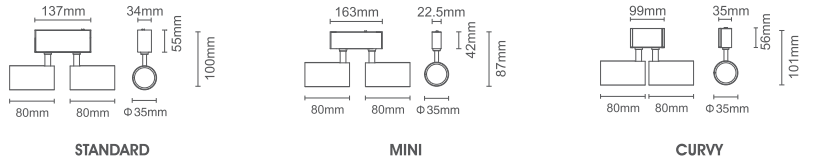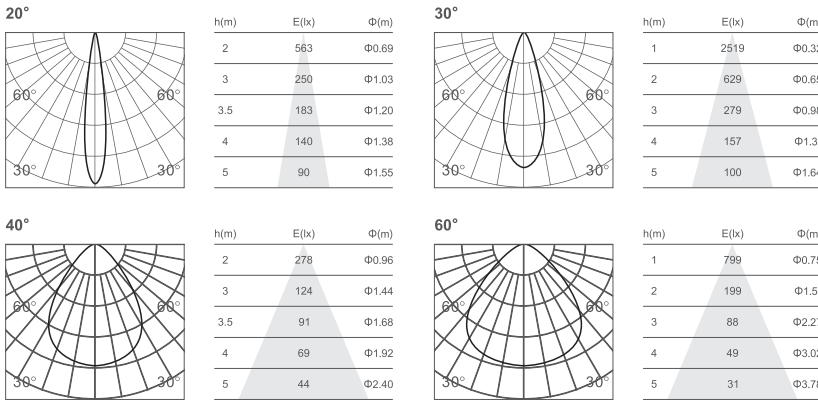





UMAG-SPOT12-GLD-WW
UMAG-SPOT12-BLK-WW/WH-WW



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 95	< 3	3000K	36°	870LM

Sandy Black Sandy White Golden

LIGHT DISTRIBUTION
3000K 90Ra

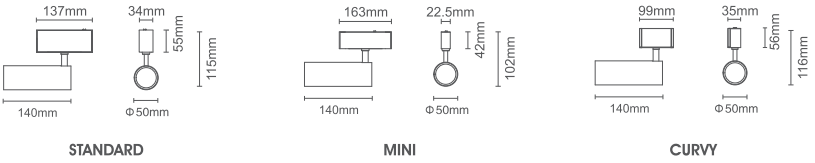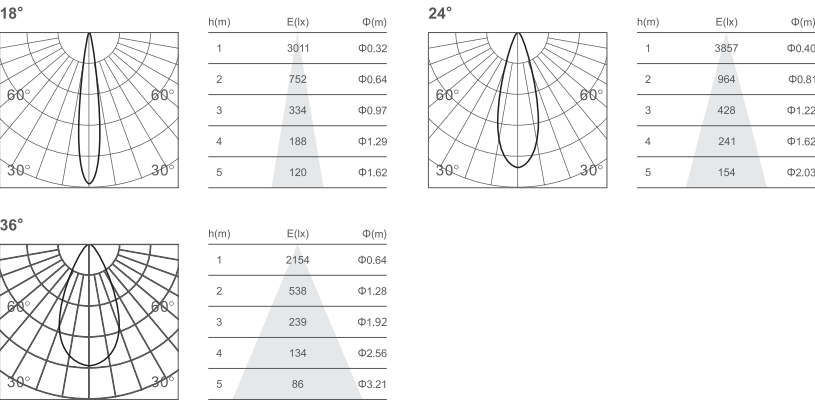



UMAG-SLOT8-BLK/WH-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	10°	405Lm
	> 90		3000K	20°	
			4000K	30°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
2	4203	Φ0.20
3	1051	Φ0.40
3.5	467	Φ0.61
4	262	Φ0.81
5	168	Φ1.02




h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33




h(m)	E(lx)	Φ(m)
2	699	Φ0.53
3	174	Φ1.06
3.5	77	Φ1.60
4	43	Φ2.13
5	27	Φ2.66



STANDARD



MINI



CURVY



UMAG-SLOT15-BLK/WH-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80	< 3	2700K	10°	905Lm
	> 90		3000K	20°	
			4000K	30°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	10271	Φ0.19
2	2568	Φ0.38
3	1141	Φ0.58
4	641	Φ0.77
5	410	Φ0.97




h(m)	E(lx)	Φ(m)
1	4847	Φ0.30
2	1212	Φ0.60
3	538	Φ0.90
4	302	Φ1.20
5	193	Φ1.51




h(m)	E(lx)	Φ(m)
1	2371	Φ0.46
2	592	Φ0.92
3	263	Φ1.38
4	148	Φ1.84
5	94	Φ2.30



STANDARD



MINI



CURVY



UMAG-CUBE12-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	15°	600Lm
	> 90		3000K	24°	
			4000K	36°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	3011	Φ0.32
2	752	Φ0.64
3	334	Φ0.97
4	188	Φ1.29
5	120	Φ1.62




h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03




h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21



STANDARD



MINI



CURVY



UMAG-SPOT20-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
20W	> 80	< 3	2700K	15°	1450Lm
	> 90		3000K	24°	
			4000K	36°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	8050	Φ0.31
2	2012	Φ0.63
3	894	Φ0.95
4	503	Φ1.27
5	322	Φ1.59




h(m)	E(lx)	Φ(m)
1	5787	Φ0.47
2	1447	Φ0.95
3	643	Φ1.42
4	361	Φ1.90
5	231	Φ2.37




h(m)	E(lx)	Φ(m)
1	3344	Φ0.72
2	836	Φ1.44
3	371	Φ2.17
4	209	Φ2.89
5	133	Φ3.61




STANDARD



MINI




CURVY



Angle adjustment

Halo Dot




Φ164mm




Φ120mm

Halo Balance



Φ164mm



Φ120mm




UMAG-HALO-DOT-18BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	24°	1750Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black ■ Sandy White

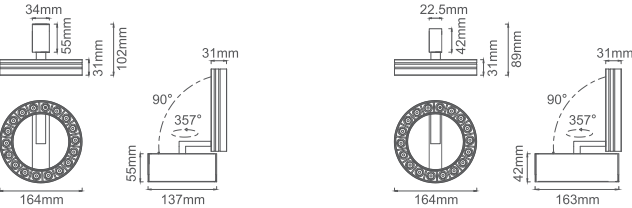

STANDARD

MINI



CURVY




UMAG-HALO-BALANCE-18BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	Diffuse	950Lm
	> 90		3000K		
			4000K		

■ Sandy Black ■ Sandy White

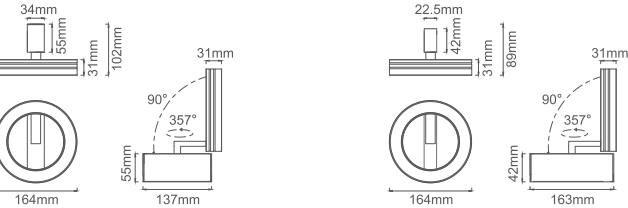

STANDARD

MINI



CURVY




UMAG-HALO-DOT-12BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	24°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


■ Sandy Black ■ Sandy White



STANDARD



MINI



CURVY




UMAG-HALO-BALANCE-12BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	Diffuse	650Lm
	> 90		3000K		
			4000K		


■ Sandy Black ■ Sandy White



STANDARD



MINI



CURVY





UMAG-PENDANT5-BLK/WH-WW (Made to Order)





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden Black bronze

LIGHT DISTRIBUTION

3000K 90Ra

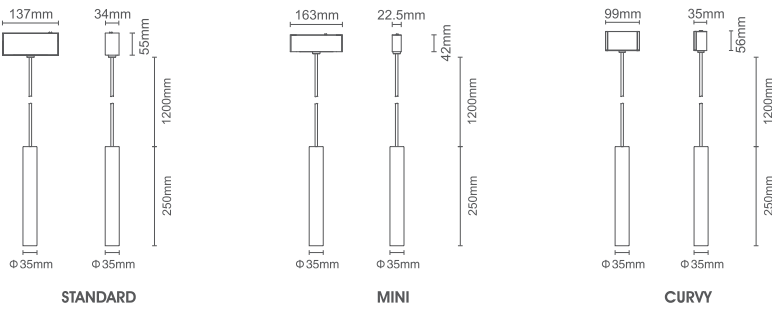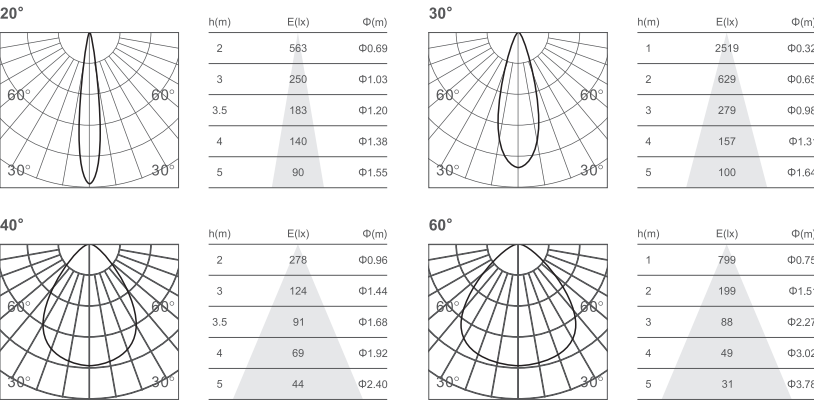

UMAG-PENDANT10-BLK-WW





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

Sandy Black Sandy White Golden Black bronze

LIGHT DISTRIBUTION

3000K 90Ra

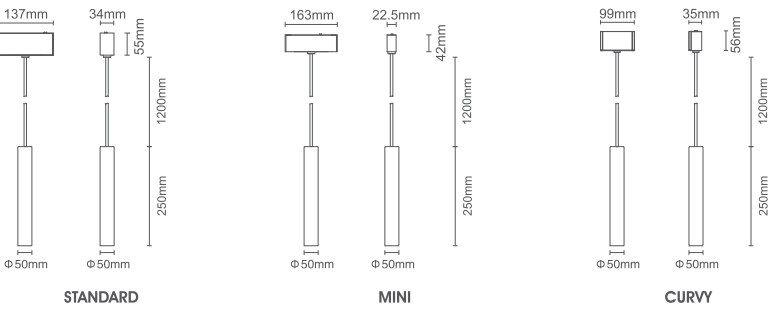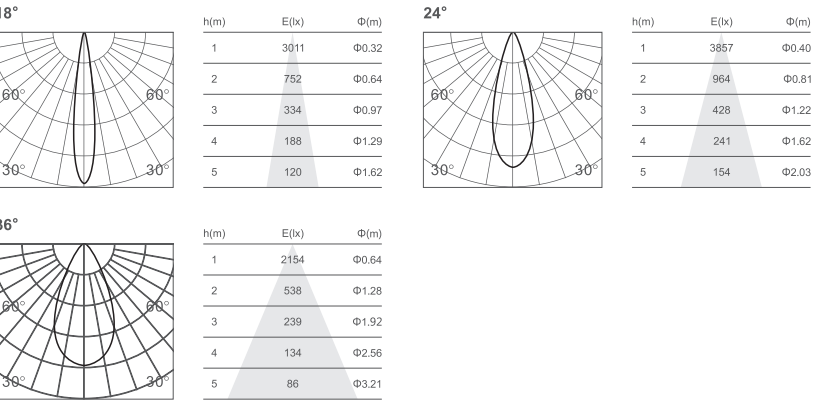



UMAG-P-HOOD-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	480Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 90Ra


Diffuse




h(m)	E(lx)	Φ(m)
1	500	Φ1.20
2	125	Φ2.40
3	55.6	Φ3.60
4	31.2	Φ4.80
5	20	Φ6.00



STANDARD



MINI



CURVY





UMAG-P-GLOBAL-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	290Lm

Sandy Black Sandy White


LIGHT DISTEIBUTION
2700K 80Ra

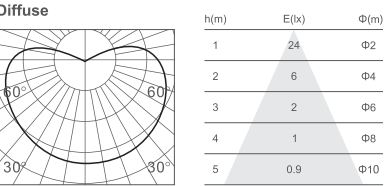

STANDARD



MINI



CURVY





UMAG-GLOBAL-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	290Lm

Sandy Black Sandy White


LIGHT DISTEIBUTION
2700K 80Ra

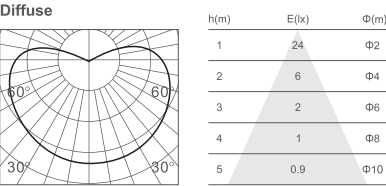

STANDARD



MINI



CURVY



MINI

series



27.5mm

- Surface
- Pendant
- Recessed



27.5mm



- Recessed

(MINI SERIES ARE MADE TO ORDER ONLY)



Model	Power	Install	Length
UMAG-MINI-TRAK-1M	200W max	Surface/Pendant/Recessed	1000mm
UMAG-MINI-TRAK-2M	200W max	Surface/Pendant/Recessed	2000mm
UMAG-MINI-TRAK-3M	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black Sandy White Golden Black bronze

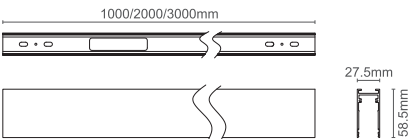

CORNER

UMAG-L-JOINER-BLK/WH

Sandy Black Sandy White



UMAG-MINI-T-JOINER-BLK/WH

Sandy Black Sandy White



UMAG-MINI-INCORNER-BLK/WH

Sandy Black Sandy White



UMAG-MINI-45D-CORNER-BLK/WH

Sandy Black Sandy White




UMAG-MINI-OUTCORNER-BLK/WH

Sandy Black Sandy White




UMAG-MINI-CROSS-CORNER-BLK/WH

Sandy Black Sandy White



Model	Power	Install	Length
UMAG-MINI-TRAKR-1M	200W max	Recessed	2000mm
UMAG-MINI-TRAKR-2M	200W max	Recessed	3000mm


Sandy Black Sandy White Golden Black bronze



CORNER


UMAG-MINI-L-RSJOINER-BLK/WH

Sandy Black Sandy White




UMAG-MINI-INCORNER-RS-BLK/WH


Sandy Black Sandy White



UMAG-MINI-OUTCORNER-RS-BLK/WH

Sandy Black Sandy White



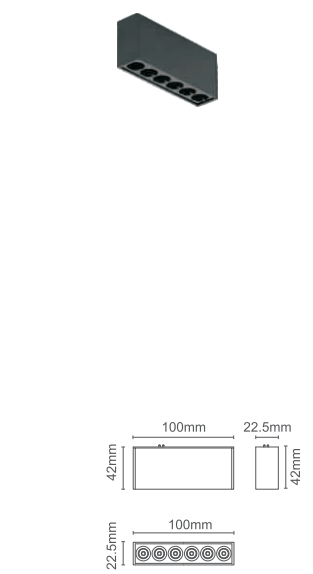

UMAG-MINI-DOT6-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 80	< 3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	3669	Φ0.37
2	917	Φ0.74
3	407	Φ1.11
4	229	Φ1.48
5	146	Φ1.85



h(m)	E(lx)	Φ(m)
1	2577	Φ0.41
2	644.2	Φ0.83
3	286.3	Φ1.25
4	161	Φ1.67
5	103	Φ2.09



h(m)	E(lx)	Φ(m)
1	1654	Φ0.63
2	413	Φ1.26
3	183	Φ1.89
4	103	Φ2.53
5	66	Φ3.16



UMAG-MINI-DOT24-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 80	< 3	2700K	18°	2400Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	16424	Φ0.33
2	4106	Φ0.66
3	1825	Φ0.99
4	1027	Φ1.33
5	657	Φ1.66



h(m)	E(lx)	Φ(m)
1	8554	Φ0.45
2	2139	Φ0.90
3	950	Φ1.36
4	534	Φ1.81
5	342	Φ2.27



h(m)	E(lx)	Φ(m)
1	6074	Φ0.62
2	1518	Φ1.25
3	674	Φ1.87
4	379	Φ2.50
5	243	Φ3.12

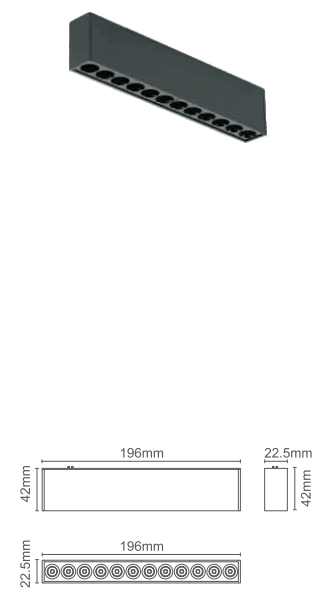

UMAG-MINI-DOT12-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	8122	Φ0.33
2	2031	Φ0.67
3	902	Φ1.01
4	507	Φ1.35
5	324	Φ1.69



h(m)	E(lx)	Φ(m)
1	4110	Φ0.45
2	1027	Φ0.90
3	456.7	Φ1.36
4	256.9	Φ1.81
5	164.4	Φ2.26



h(m)	E(lx)	Φ(m)
1	3006	Φ0.65
2	751	Φ1.31
3	334	Φ1.97
4	187	Φ2.63
5	120	Φ3.28



UMAG-MINI-BALANCE-8-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	460Lm

Sandy Black Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	170	Φ2.50
2	42	Φ5.01
3	18	Φ7.52
4	10	Φ10.03
5	6	Φ12.54



UMAG-MINI-BALANCE-30-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	1800Lm

Sandy Black Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	674.1	Φ2.22
2	168.5	Φ4.44
3	74.9	Φ6.66
4	42.1	Φ8.88
5	26.9	Φ11.11



UMAG-MINI-BALANCE-15-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	900Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	359.7	Φ2.11
2	89.9	Φ4.23
3	39.9	Φ6.35
4	22.4	Φ8.47
5	14.3	Φ10.5



UMAG-SCOOP8-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	

 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

18°




h(m)	E(lx)	Φ(m)
1	3669	Φ0.37
2	917	Φ0.74
3	407	Φ1.11
4	229	Φ1.48
5	146	Φ1.85

34°



h(m)	E(lx)	Φ(m)
1	2577	Φ0.41
2	644.2	Φ0.83
3	286.3	Φ1.25
4	161	Φ1.67
5	103	Φ2.09

48°



h(m)	E(lx)	Φ(m)
1	1654	Φ0.63
2	413	Φ1.26
3	183	Φ1.89
4	103	Φ2.53
5	66	Φ3.16



UMAG-MINI-FOLD8-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	460Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.35
2	47	Φ4.71
3	21	Φ7.07
4	11	Φ9.43
5	7	Φ11.78



UMAG-SCOOP16-BLK-WW




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	

 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

18°




h(m)	E(lx)	Φ(m)
1	8122	Φ0.33
2	2031	Φ0.67
3	902	Φ1.01
4	507	Φ1.35
5	324	Φ1.69

34°



h(m)	E(lx)	Φ(m)
1	4110	Φ0.45
2	1027	Φ0.90
3	456.7	Φ1.36
4	256.9	Φ1.81
5	164.4	Φ2.26

48°



h(m)	E(lx)	Φ(m)
1	3006	Φ0.65
2	751	Φ1.31
3	334	Φ1.97
4	187	Φ2.63
5	120	Φ3.28



UMAG-MINI-FOLD16-BLK/WH




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	Diffuse	900Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	321	Φ2.38
2	80	Φ4.77
3	35	Φ7.16
4	20	Φ9.55
5	12	Φ11.94





Pendant



Surface




Recessed

CIRCULAR MAGNETIC SYSTEM

Experience the new track addition—where the Circular magnetic system empowers your imagination like never before.

- Black
- White
- Golden
- Black bronze

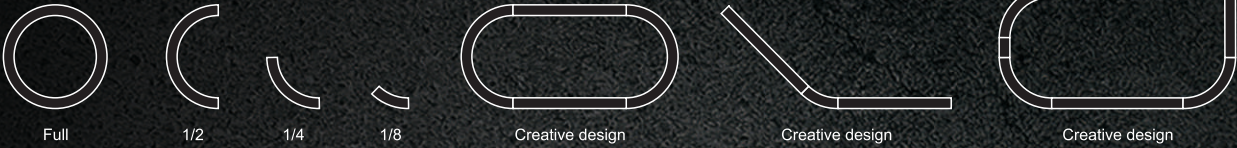





UTRKM-CIRC900-BLK/WH/PB
UTRKM-CIRC1200-BLK/WH/PB



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black Sandy White Golden Black bronze

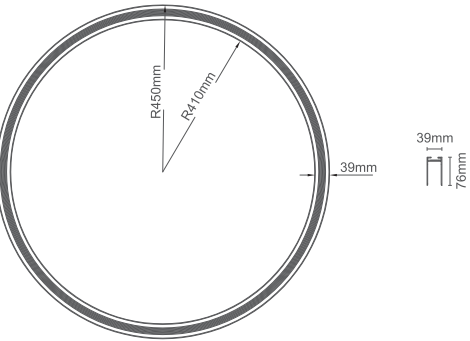



UTRK-M-CIRC-1/4-BLK/WH/PB



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black Sandy White Golden Black bronze





UTRK-M-CIRC-1/2-BLK/WH/PB



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black Sandy White Golden Black bronze

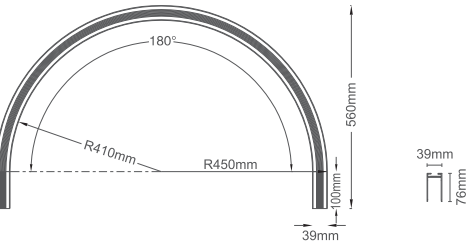



UTRK-M-CIRC-1/8-BLK/WH/PB



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black Sandy White Golden Black bronze





UTRK-M-CIRC-DOT4-BLK/WH/PB




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	5125	Φ0.17
2	1281	Φ0.35
3	569	Φ0.53
4	320	Φ0.71
5	205	Φ0.89



h(m)	E(lx)	Φ(m)
1	1560	Φ0.61
2	390	Φ1.23
3	173	Φ1.85
4	97	Φ2.47
5	62	Φ3.07



h(m)	E(lx)	Φ(m)
1	1579	Φ0.57
2	394	Φ1.15
3	175	Φ1.73
4	98	Φ2.31
5	63	Φ2.89



UTRK-M-CIRC-DOT8-BLK/WH/PB




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 90Ra




h(m)	E(lx)	Φ(m)
1	8069	Φ0.19
2	2017	Φ0.38
3	896	Φ0.57
4	504	Φ0.76
5	322	Φ0.96



h(m)	E(lx)	Φ(m)
1	2800	Φ0.53
2	700	Φ1.07
3	311	Φ1.60
4	175	Φ2.14
5	112	Φ2.67



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



UTRK-M-CIRC-BALANCE8-BLK/WH/PB




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	119	Φ2.56
2	29	Φ5.12
3	13	Φ7.68
4	7	Φ10.24
5	4	Φ12.81



ACCESSORIES

UTRK-M-CIRC-RECESSED-KIT

 Sandy Black  Sandy White



Recessed kit for full curvy track

