

SENSOR-INT-ON/OFF

Internal Sensor - ON/OFF



Description

SENSOR-INT-01 is a range of internal microwave sensors designed specifically to be internally mounted into luminaires, such as LED Batten Lights. Available in an ON/OFF model, which as it suggests, will switch the luminaire on and off when triggered. Also available with DIM function, to allow for the luminaire to turn on at desired percentage lux levels. To change sensor default settings, a remote is required, sold separately. One remote control will operate unlimited sensors for future installations. Backed by a 5 Year Warranty.



Specification Features


| | |
|----------------------|---------------------------------|
| Input Voltage: | 240VAC |
| Rated Load(W): | 400W LED |
| IP rating (IP): | IP20 |
| Detection Range: | Max 2-6m (<24°C) |
| Installation Height: | 2.5-6m |
| Time Delay: | 5sec, 1min, 5min, 10min |
| Lux Adjustable: | 2 lux, 10 lux, 50 lux, disable |
| Working Temperature: | -20°C~+60°C |
| Size: | 65x36x23mm & 41x24x14mm |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

Note: To change settings, a remote is required. One remote control will operate unlimited sensors for future installations.



SENSOR-INT-01-REM-ON-OFF

Diagrams / Additional

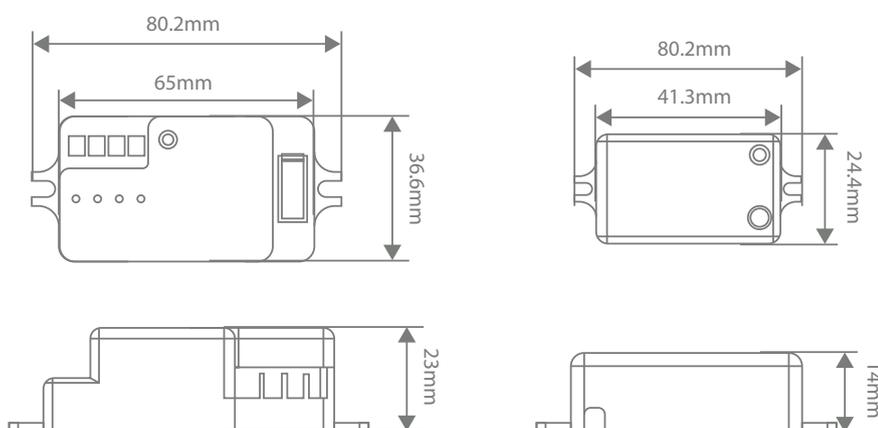

| Item No. | Variant |
|-------------------|---------|
| SENSOR-INT-01 | 60693 |
| SENSOR-INT-01-REM | 66090 |

SENSOR-INT-DIM Internal Sensor - Dimming



Description

SENSOR-INT-01 is a range of internal microwave sensors designed specifically to be internally mounted into luminaires, such as LED Batten Lights. Available in an ON/OFF model, which as it suggests, will switch the luminaire on and off when triggered. Also available with DIM function, to allow for the luminaire to turn on at desired percentage lux levels. To change sensor default settings, a remote is required, sold separately. One remote control will operate unlimited sensors for future installations. Backed by a 5 Year Warranty.



Specification Features

| | |
|----------------------|--|
| Input Voltage: | 240V AC |
| Rated Load(W): | 400W LED |
| IP rating (IP): | IP20 |
| Detection Range: | Max 2-6m (<24°C) |
| Installation Height: | 2.5-6m |
| Time Delay: | 5sec, 30sec, 1min, 3min, 5min, 10min, 20min, 30min |
| Stand By Period: | 0sec, 10sec, 30sec, 1min, 5min, 10min, 30min, + continuous |
| Lux Adjustable: | 2 lux, 10 lux, 30 lux, 50 lux, 80lux, 120 lux, disable |
| Working Temperature: | -20°C~+60°C |
| Size: | 75x42x23mm & 41x24x14mm |
| Compliance: | Fully Compliant to AS/NZS2293.3 |




Note: To change settings, a remote is required.

One remote control will operate unlimited sensors for future installations.



SENSOR-INT-01-REM-DIM

Diagrams / Additional



| Item No. | Variant |
|-----------------------|---------|
| SENSOR-INT-01 | 66094 |
| SENSOR-INT-01-REM-DIM | 66091 |