













# Assembly Instructions

## PAYTON PENDANT

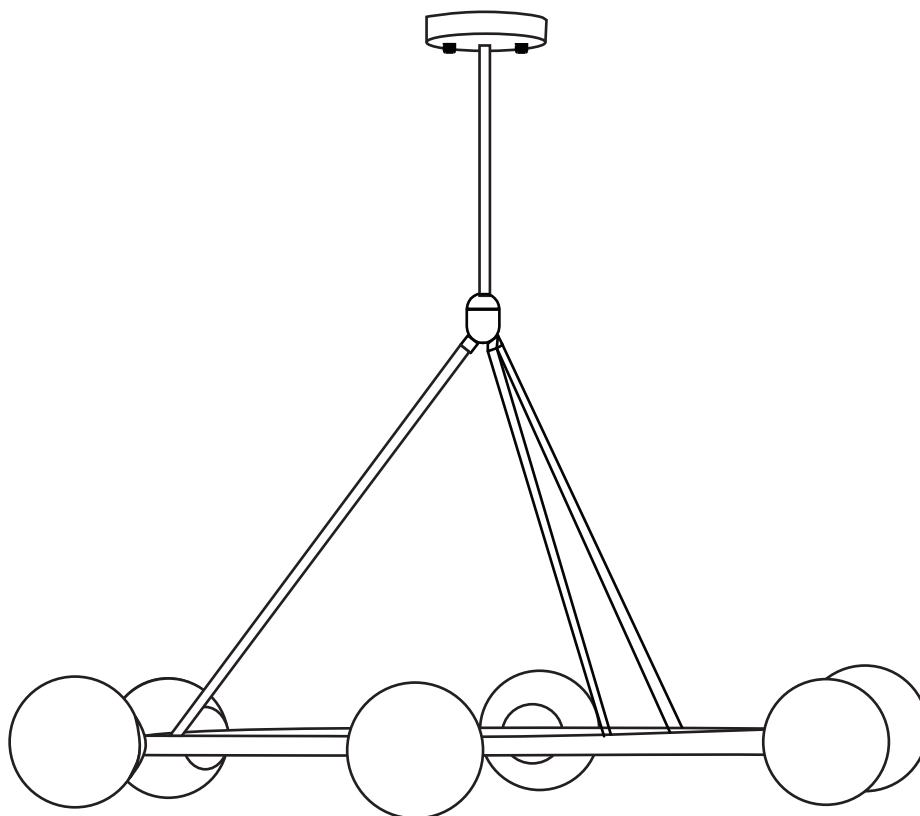


### Component Checklist

REF	A	B	C	D	E	F	G	H	I	J	K
PART										 ø150	
NAME	Expansion Tubes	Screws	Mounting Bracket	Nut Lock	Screws	Brass Canopy	Brass Rod	Lamp Body	Brass Rod	Glass Globe	Frame
QTY	4	4	1	2	6	1	2	1	3	6	1

## Putting Me Together


**WARNING:** Switch off the main electrical supply from main fuse box/ circuit breaker before installation

**NOTE:** We recommend installation of this lightning fixture be done by a licensed electrician.

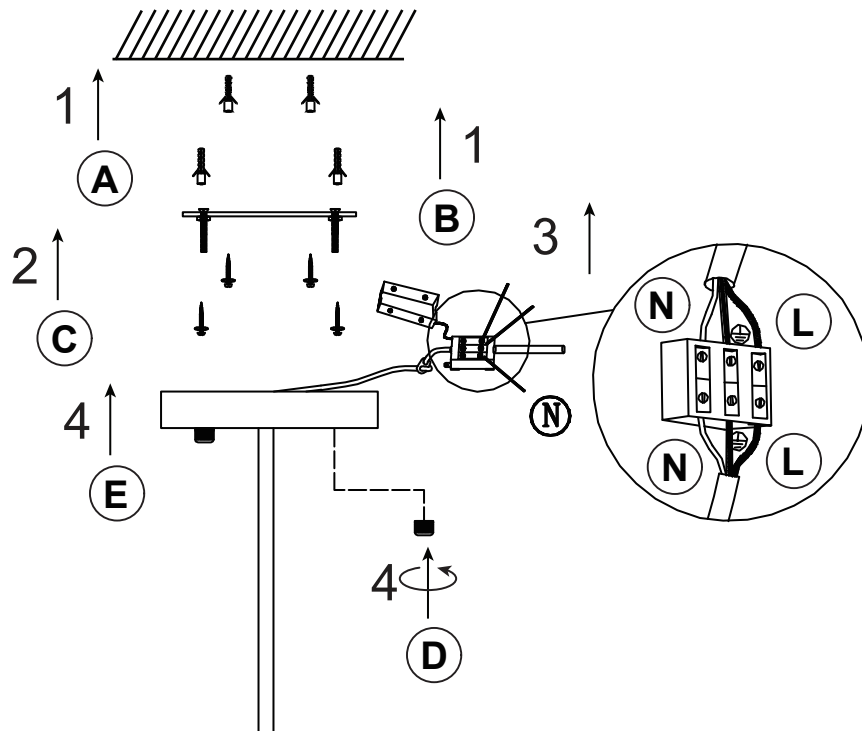

- ① Carefully, remove all parts from the box. Drill holes in the ceiling support beam based on the size of expansion tube (A) and in line with holes in mounting bracket (C).
- ② Insert expansion tubes (A) in the holes in the ceiling support beam, then ceiling support beam with screws (C).
- ③ Connect the 3 power wires from the pendant to the power wires in the ceiling.  
Brown is the Live wire  
Blue is the Neutral wire  
Green/Yellow is the Earth wire
- ④ Attach the brass canopy (E) to mounting bracket (C) and secure with nut lock (D), as shown.

## Putting Me Together

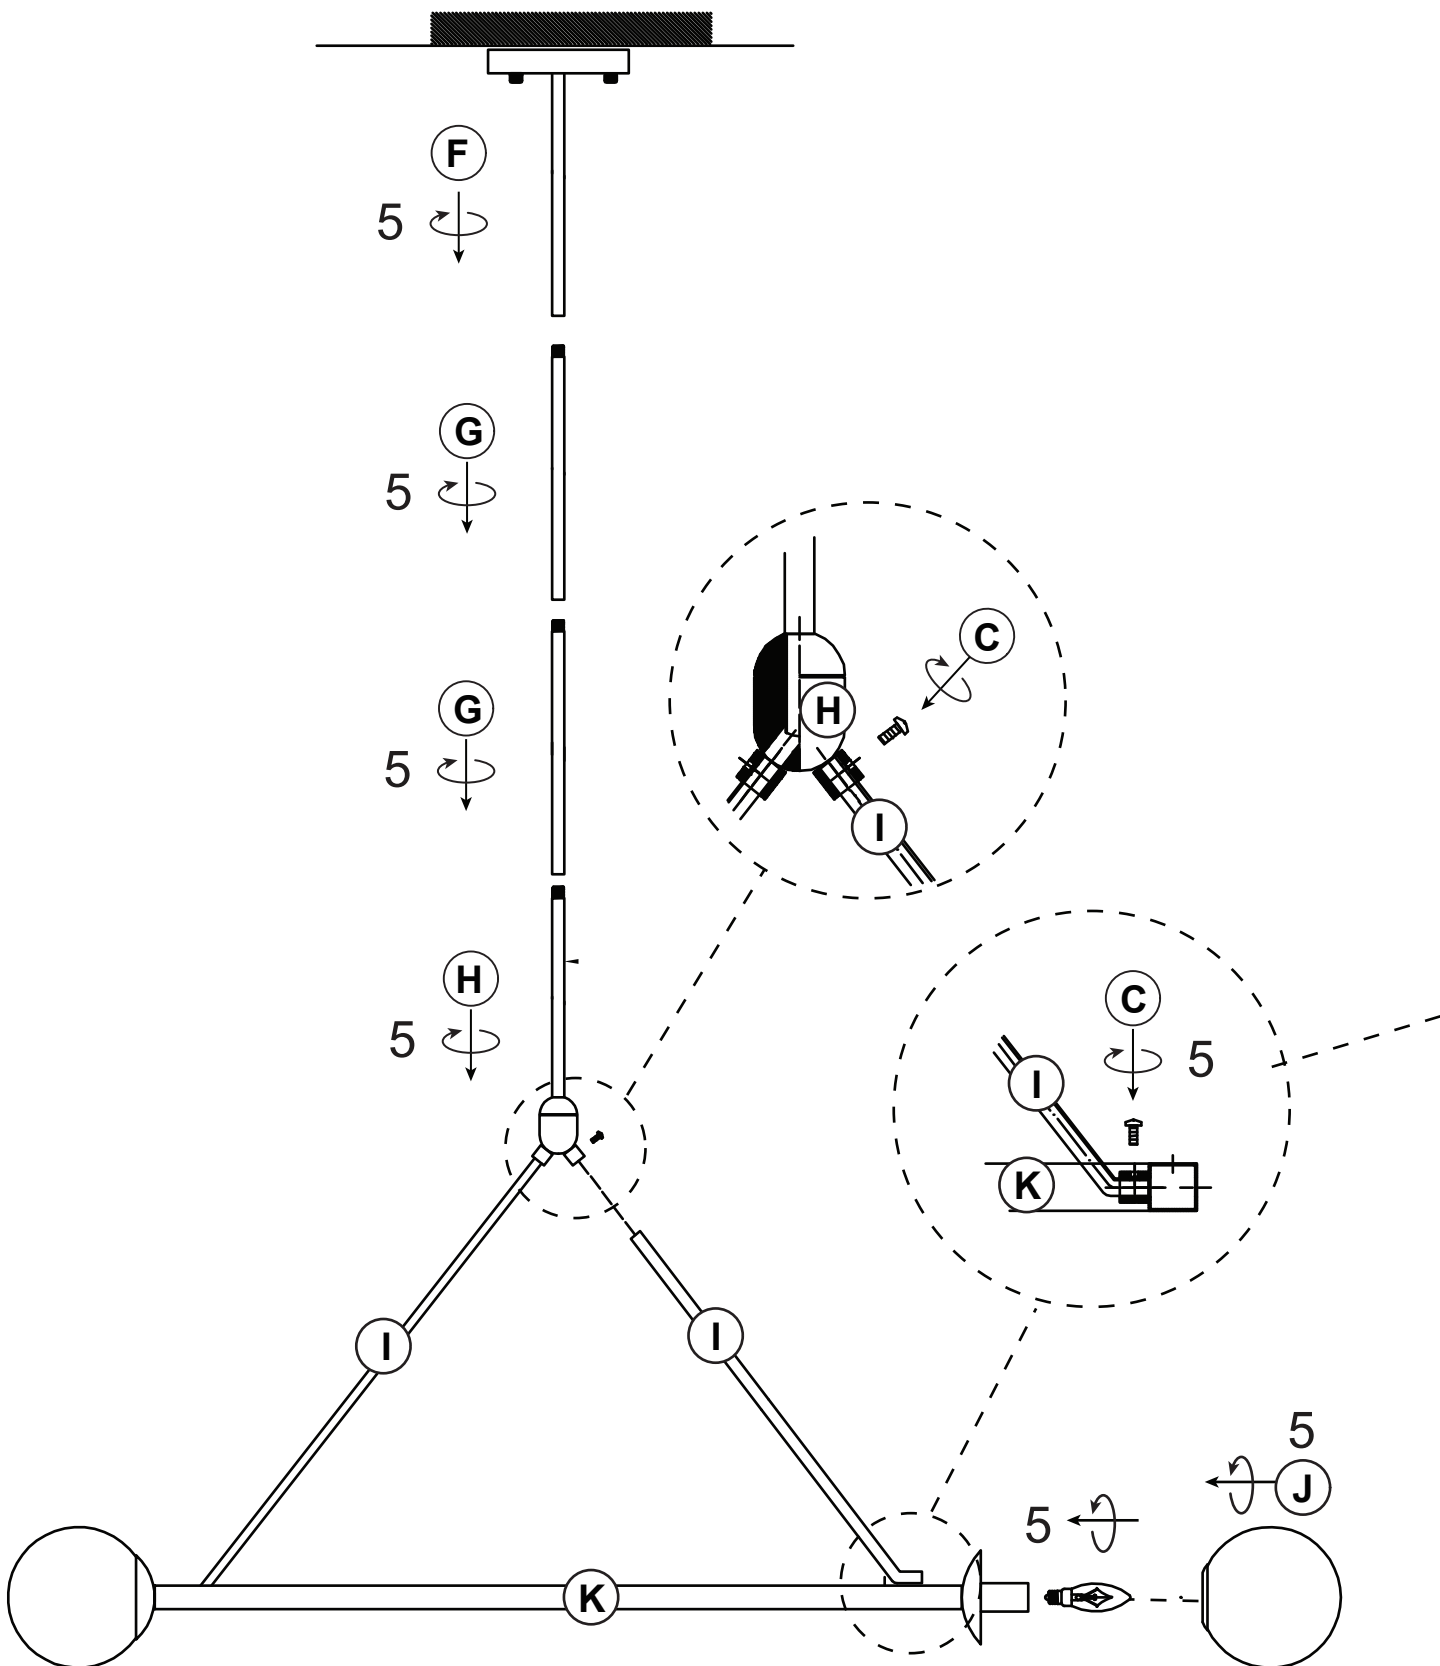

5

Fix brass canopy (F) to brass rod (G).


Assemble brass rod (G) together and attach to lamp body (H) clockwise to tighten securely.

Fix lamp body (H) to brass rod (I) using screws (C).

Fix brass rod (I) to frame (K)

Install a light bulb (not included), fix glass globe (J) to frame (H), as shown.

## Putting Me Together

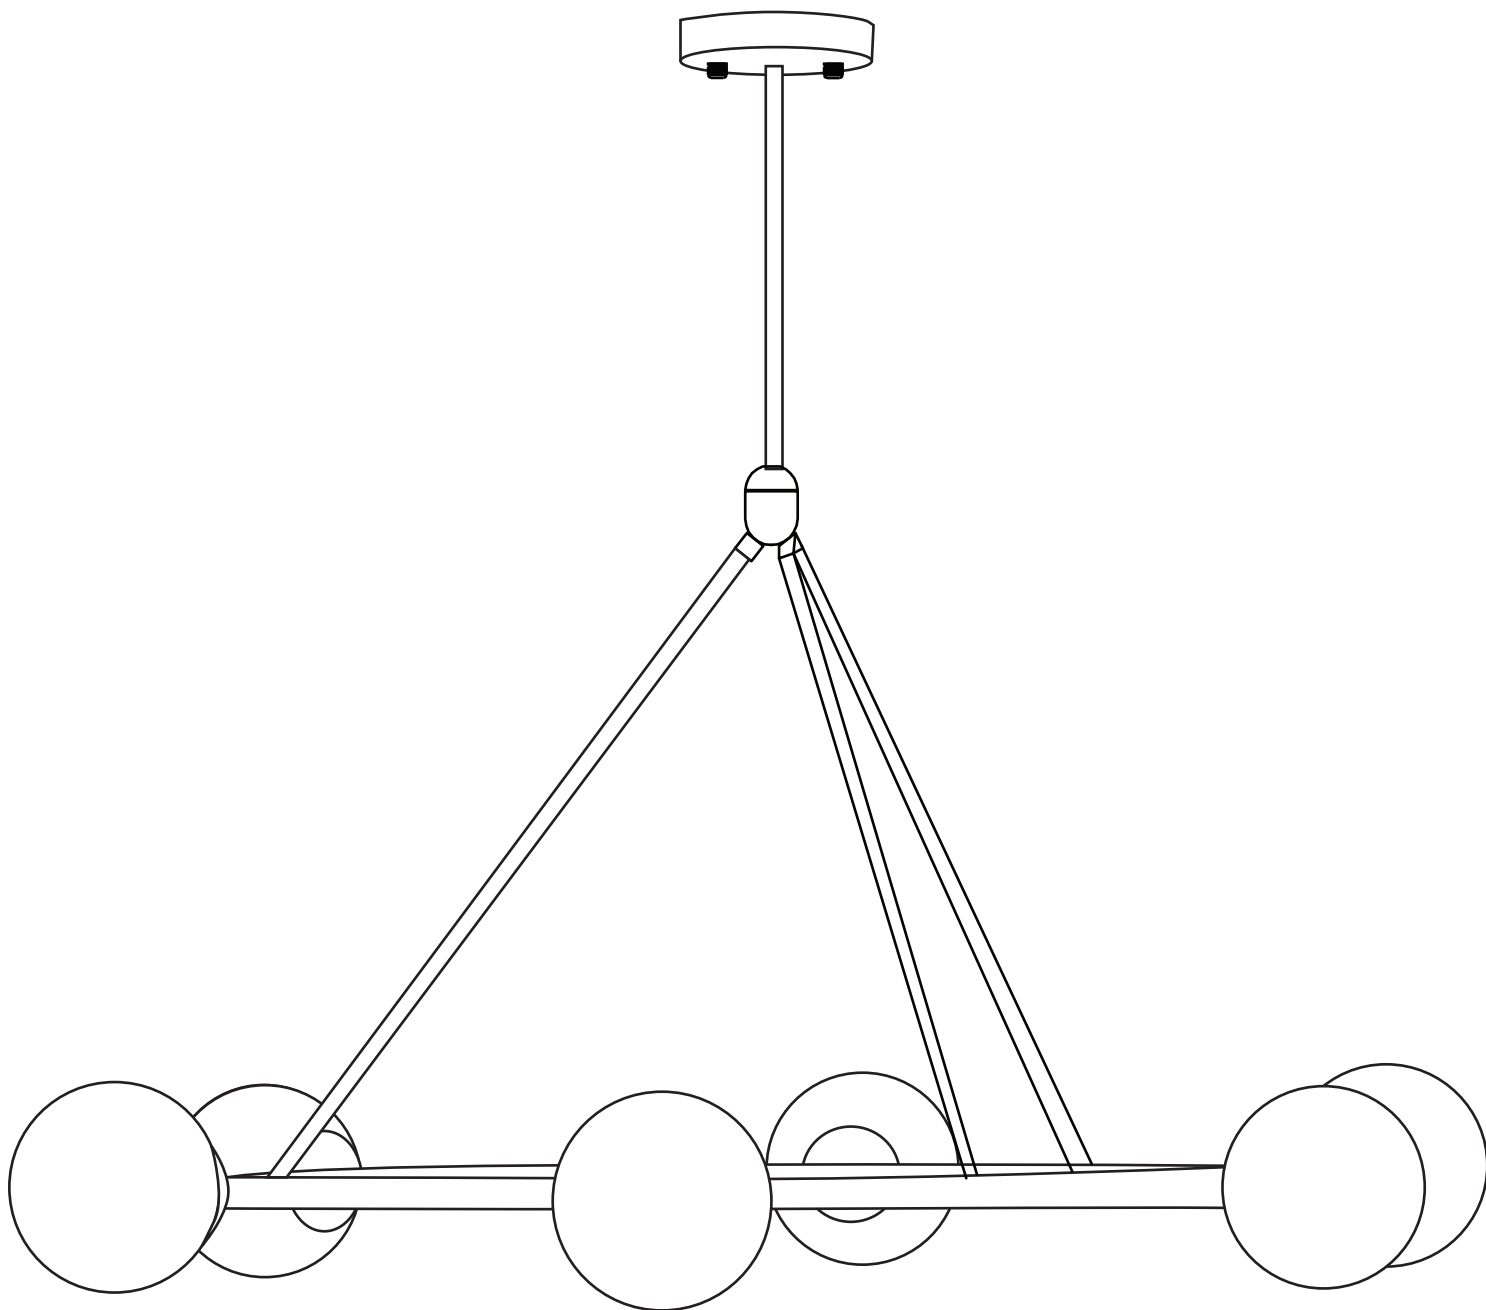

- ⑥ Installation is complete, turn on power at fuse or circuit breaker. Then turn on the pendant by turning the wall switch on and enjoy your Payton Pendant!
- ⑦ Clean with a dry, soft cloth only.  
Use no harsh abrasives or chemical agents.

220-240V-50Hz E14 Max. 25W

Bulb not included