
CAFE LIGHTING ∉ LIVING

Assembly Instructions

AURELIA PENDANT - ANTIQUE BLACK

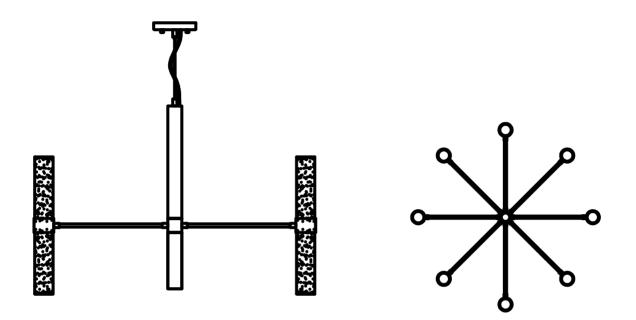


ComponentChecklist			
REF	PART	NAME	QTY
A		mounting bracket	1
В		expansion tubes	2
с	1	screws	2
D		screws	2
E		canopy	1
F		Center rod	1
G	çç	lamp body	1
н		Center rod	1
I		glass pipes	16
I		hex wrench	1


cafelightingandliving.com.au

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BEDONE BY ALICENSED ELECTRICIAN.


WARNING: SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

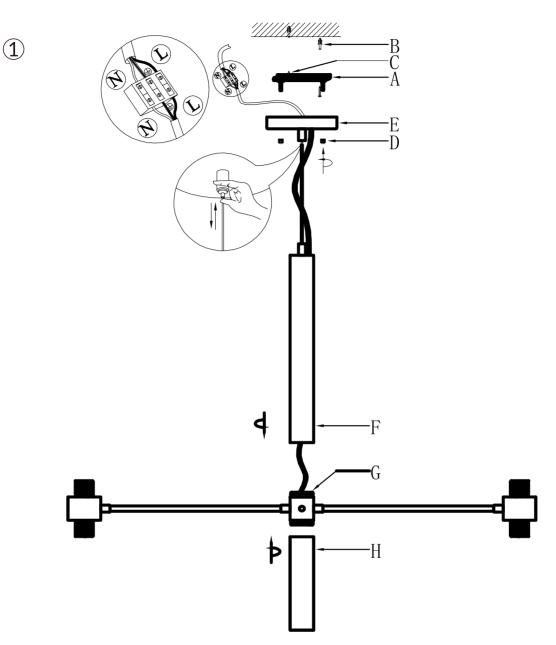

- Carefully remove all parts from the box.
- Take the mounting bracket (A) from the canopy (E) by taking off the screws (D).
- Drill holes in the ceiling support beam based on the size of the screws (C) and in line with holes in the mounting bracket.
- •Insert the expansion tubes (B) in the holes in the ceiling support beam, then fix the mounting bracket (A) to the ceiling support beam with the screws (C).
- Install the center rod (F) on the exterior screw connector of the lamp body (G), and attach the center rod (H) on the exterior screw connector of the lamp body according to the illustration.
- ENSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
- Connect the 3 power wires from the pendant to the power wires in the ceiling.
- o Brown is the Live wire
- o Blue is the Neutral wire
- o Green/Yellow is the Earth wire
- Attach the canopy (E) to the mounting bracket (A) and secure with screws (D).

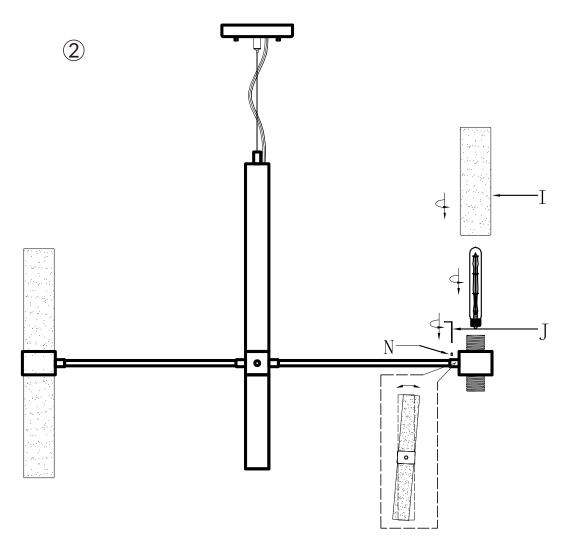

•Install the bulbs (NOT INCLUDING) on the sockets, and then attach the glass pipes (I) on the sockets. (CAUTION: YOU CAN USE THE HEX WRENCH TO ADJUST THE KIMI SCREWS IN THE ARMS VERTICALLY ACCORDING TO THE ILLUSTRATIOIN IF YOU FIND THE ARMS NOT SO VERTICAL. AND PLEASE DO NOT ADJUST THE ARMS VERTICALLY THROGH THE GLASS PIPES(I))

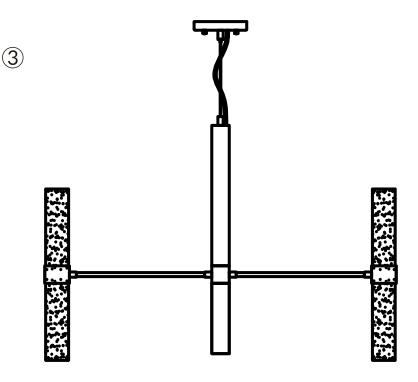

- Installation is complete, turn on power at fuse or circuit breaker.
- Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.