



Assembly Instructions





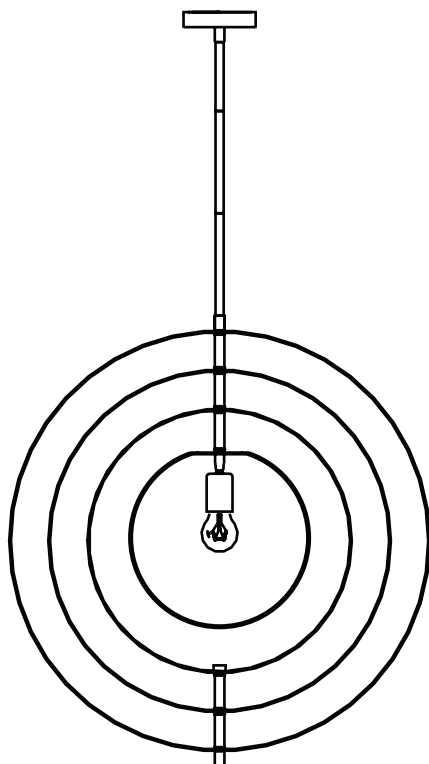




BROOKS PENDANT

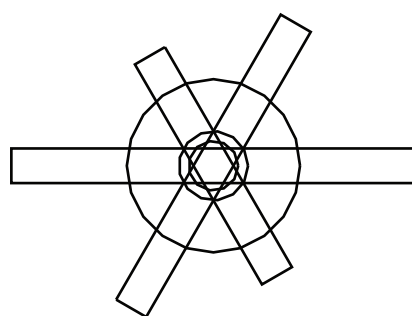

TOPVIEW




Component Checklist

REF	A	B	C	D	E	F	G	H	I
PART									
NAME	Mounting Bracket	Expanding Tubes	Screws	Screws	Canopy	Rod	Rod	Lamp Body	Glass Globe
QTY	1	2	2	2	1	1	2	1	1

Putting Me Together


WARNING: Switch off the main electrical supply from main fuse box/ circuit breaker before installation

NOTE: We recommend installation of this lightning fixture be done by a licensed electrician.

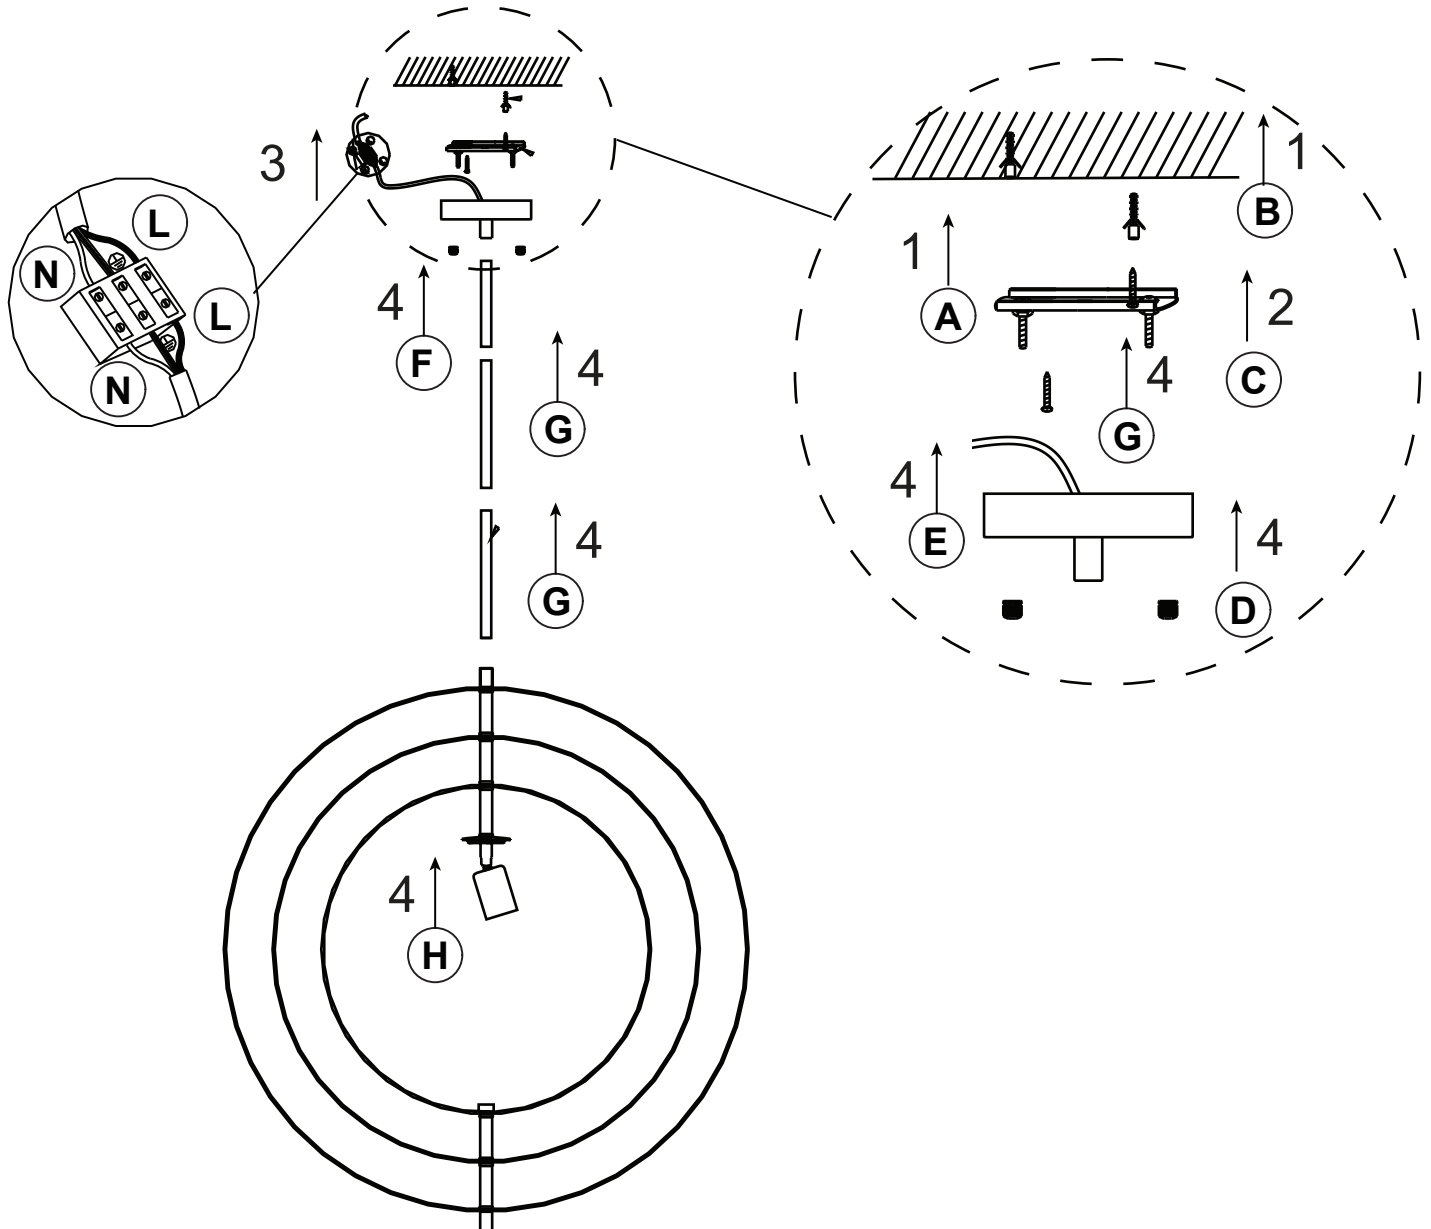

- 1 Carefully, remove all parts from the box. Drill holes in the ceiling support beam based on the size of expansion tube (B) and in line with holes in mounting bracket (A).
- 2 Insert expansion tubes (B) in the holes in the ceiling support beam, then ceiling support beam with screws (C).
- 3 Connect the 3 power wires from the pendant to the power wires in the ceiling.
Brown is the Live wire
Blue is the Neutral wire
Green/Yellow is the Earth wire
- 4 Determine the number of rods (F & G) needed based on the height, and then put the cable through the rods till through canopy (E). Attach the rods (F & G) to the screw nipple. Attach lamp body (H) to rod (G). Attach rod (F) to canopy (E). Attach the canopy (E) to mounting bracket (A) and secure with screws (D).


Putting Me Together

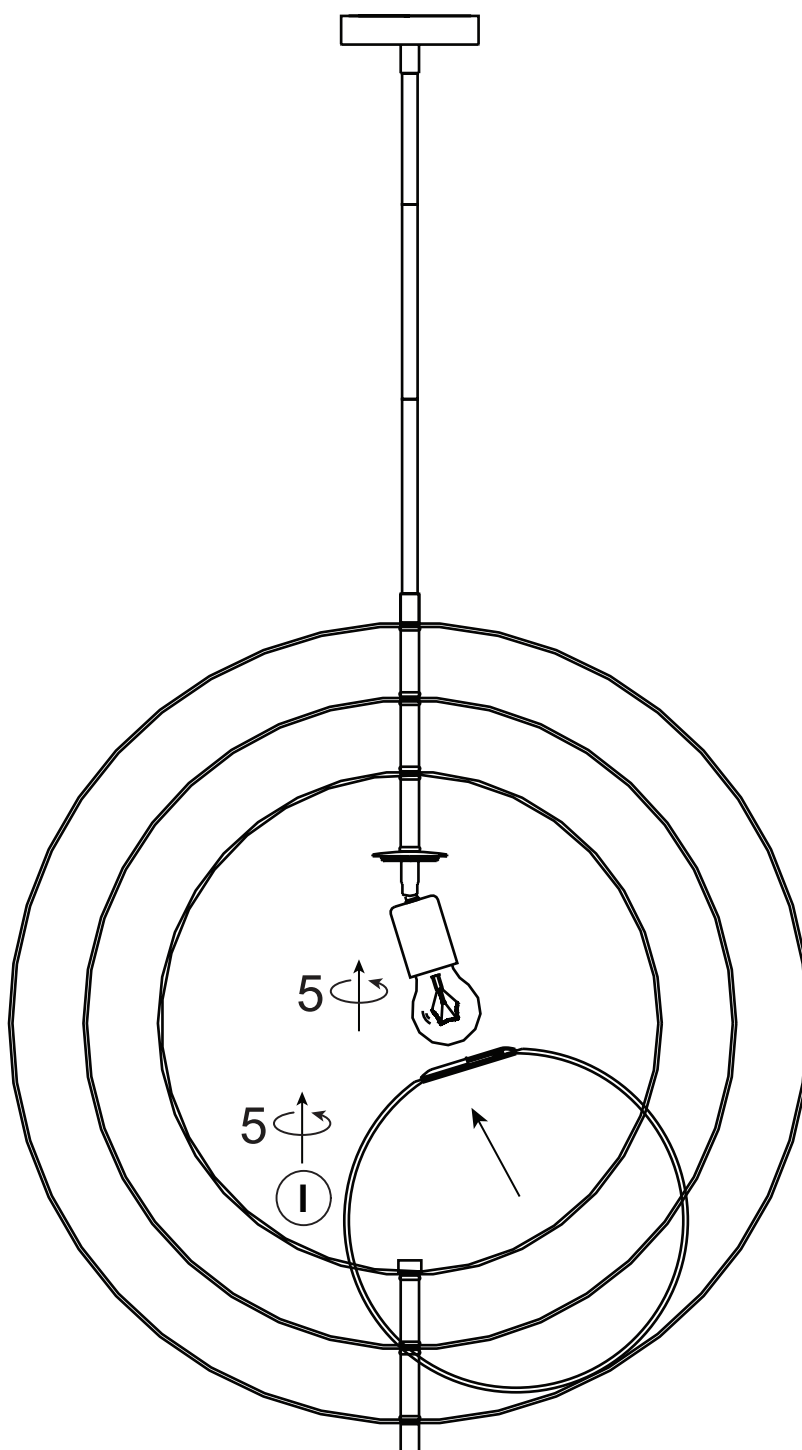

5

Install a light bulb (not included), gently hold the bulb firmly and turn until secured. Install the glass globes (1) on the sockets from the top to the bottom.

Putting Me Together

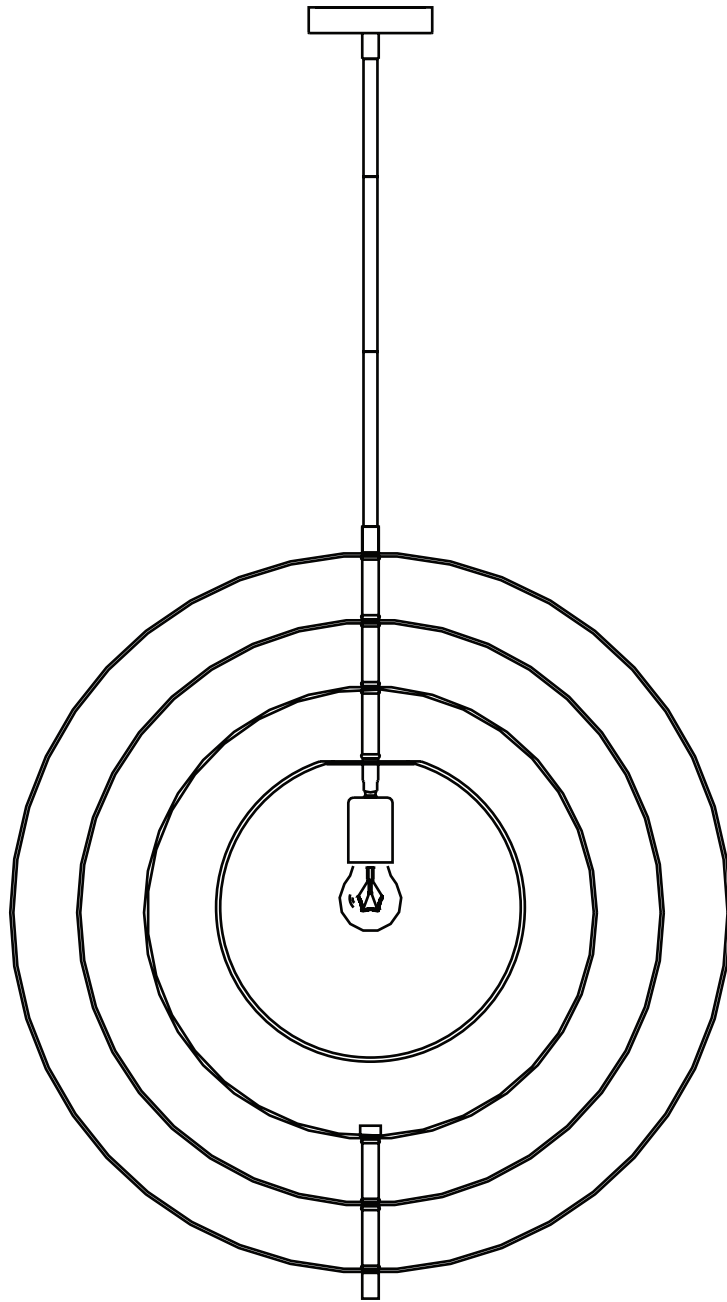

- 6 Installation is complete, turn on power at fuse or circuit breaker. Then turn on the pendant by turning the wall switch on and enjoy your Brooks Pendant!
- 7 Clean with a dry, soft cloth only.
Use no harsh abrasives or chemical agents.

220-240V-50Hz E27 Max. 60W

Bulb not included