



Assembly Instructions



DYLAN FLUSH MOUNT

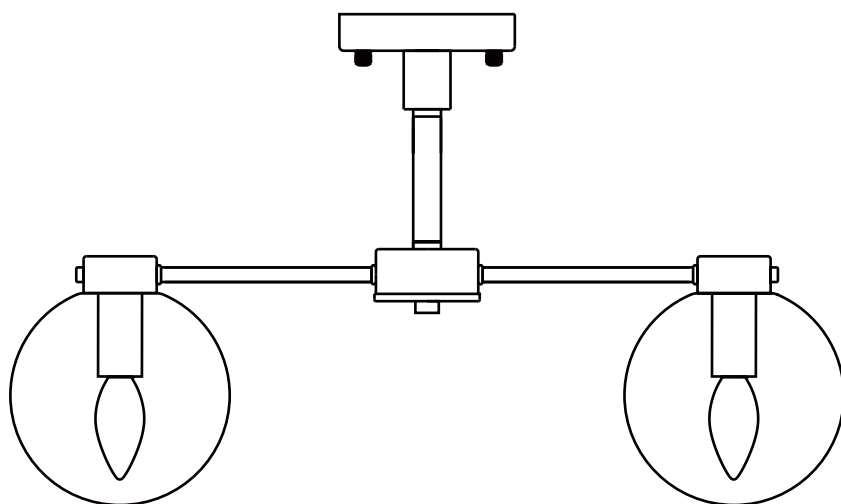

TOP VIEW

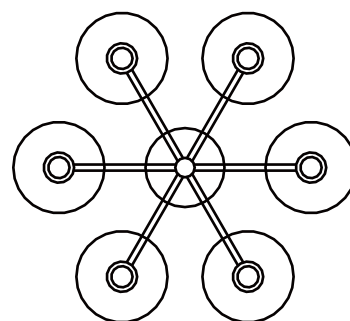


Component Checklist

REF	A	B	C	D	E	F
PART						
NAME	Mounting Bracket	Expanding Tubes	Screws	Screws	Lamp Body	Glass Globe
QTY	1	2	2	2	1	6

Putting Me Together


WARNING: Switch off the main electrical supply from main fuse box/ circuit breaker before installation

NOTE: We recommend installation of this lightning fixture be done by a licensed electrician.

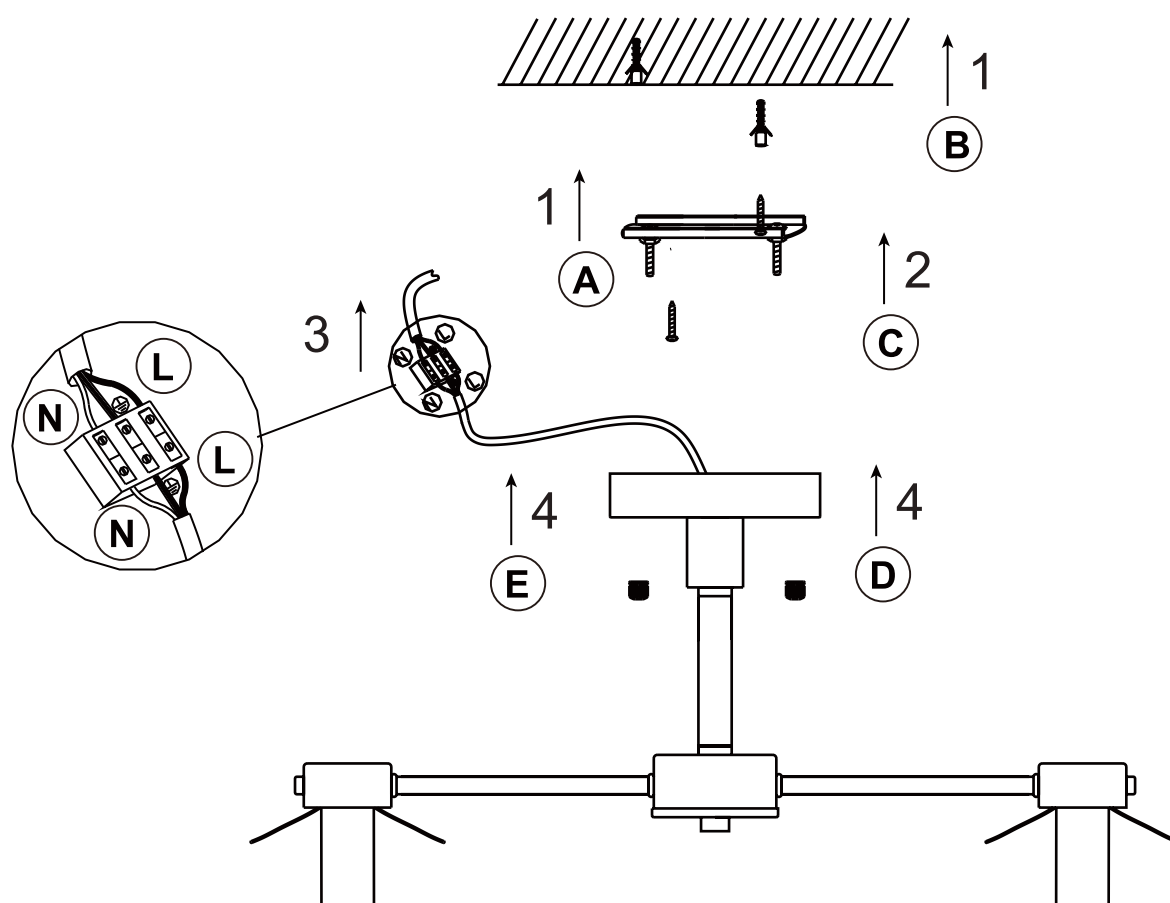

- 1 Carefully, remove all parts from the box. Drill holes in the ceiling support beam based on the size of expansion tube (B) and in line with holes in mounting bracket (A).
- 2 Insert expansion tubes (B) in the holes in the ceiling support beam, then ceiling support beam with screws (C).
- 3 Connect the 3 power wires from the pendant to the power wires in the ceiling.
Brown is the Live wire
Blue is the Neutral wire
Green/Yellow is the Earth wire
- 4 Attach the lamp body (E) to mounting bracket (A) and secure with screws (D).


Putting Me Together

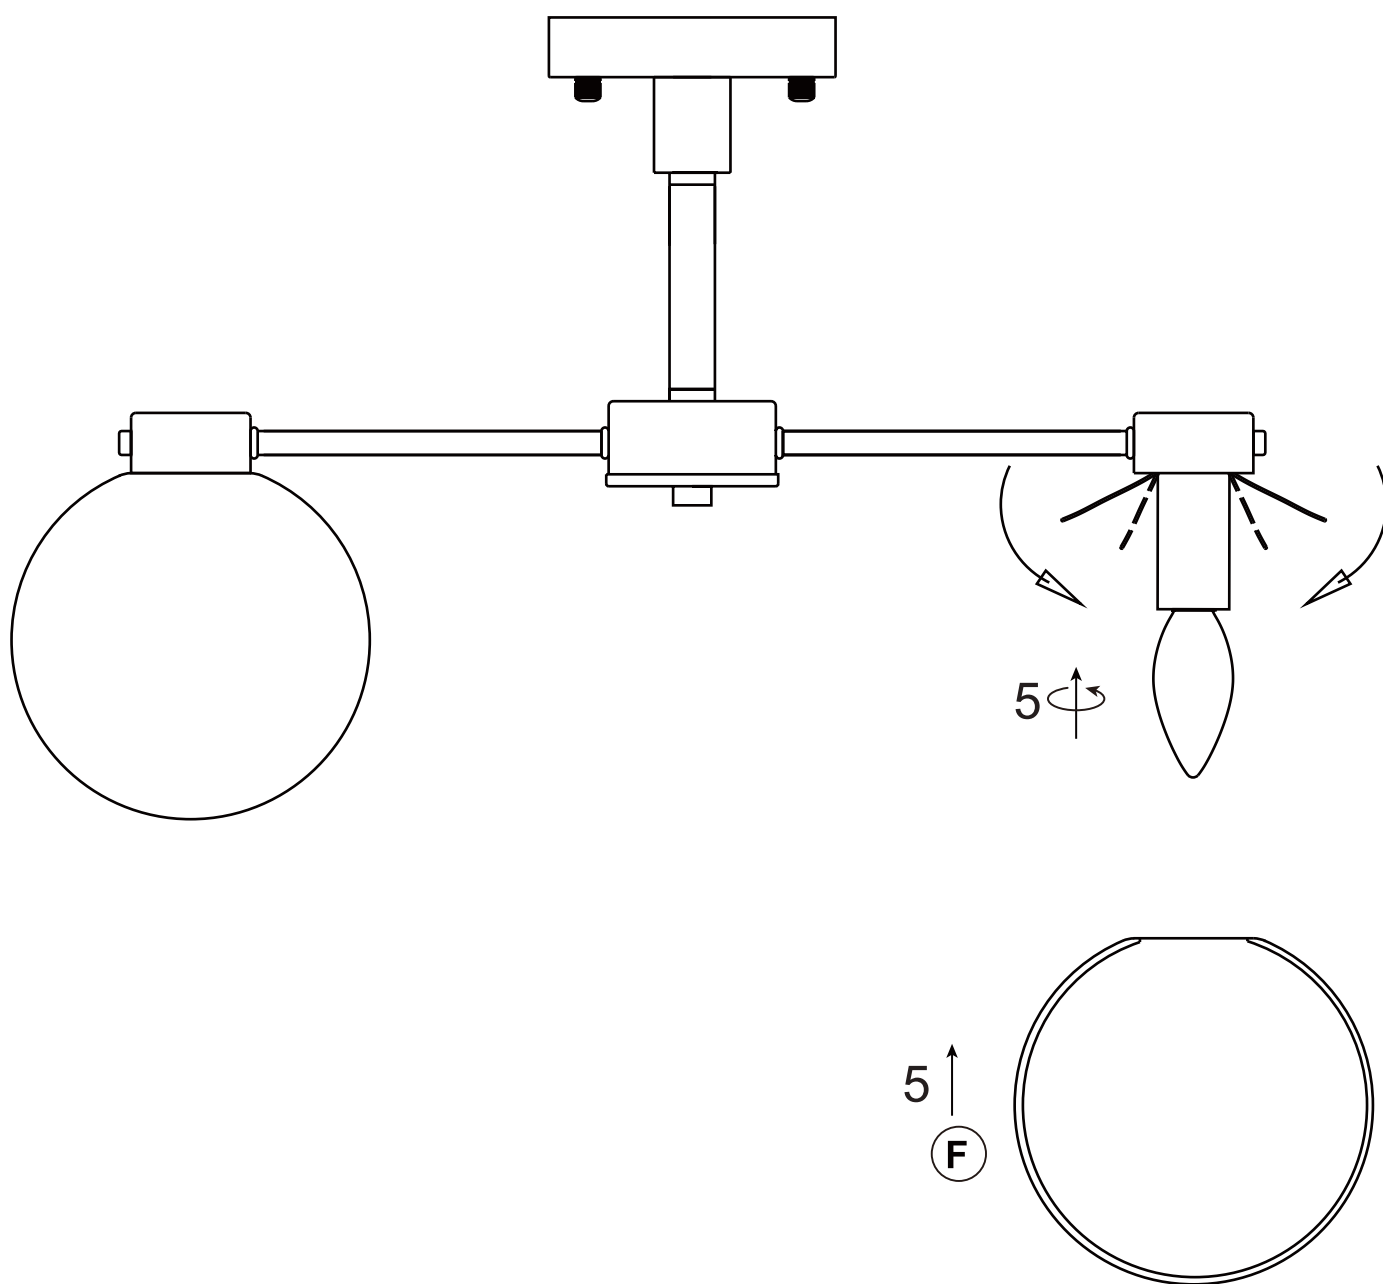

5

Install a light bulb (not included), gently hold the bulb firmly and turn until secured.
Install the glass globes (F) on the sockets from the top to the bottom

Putting Me Together

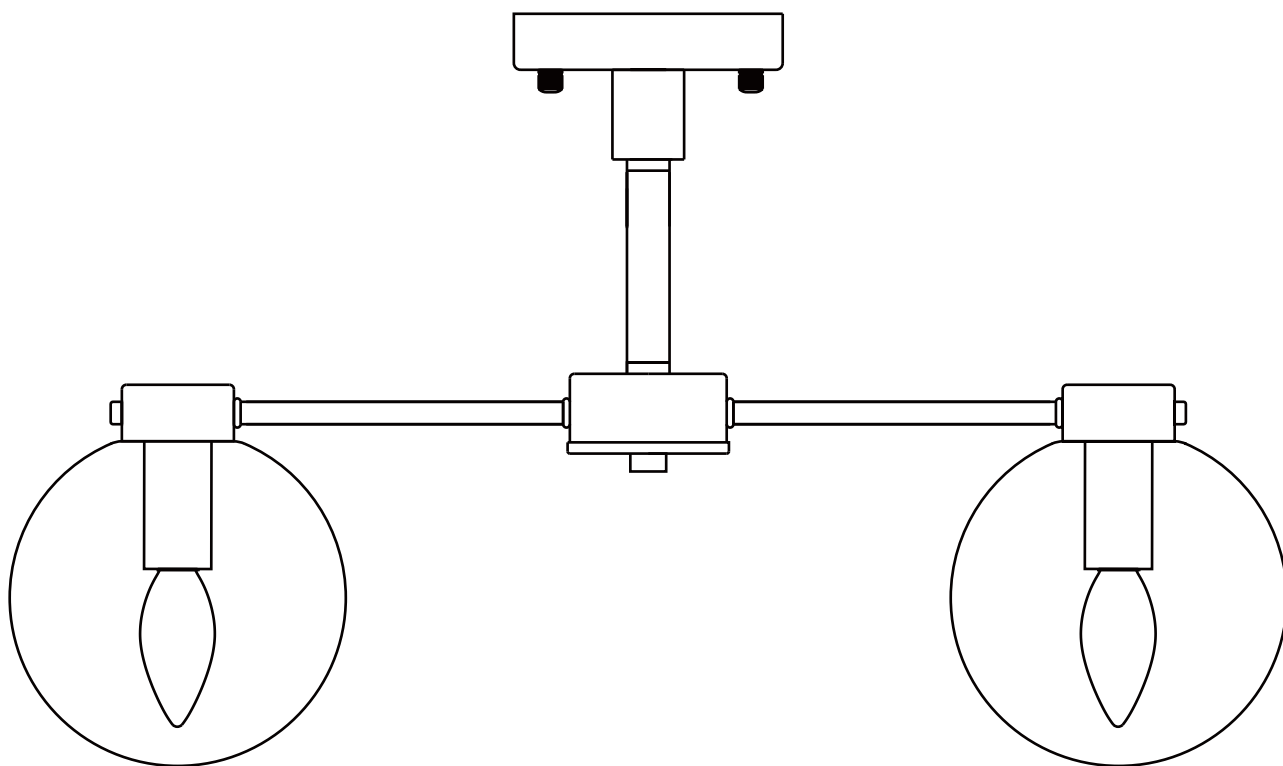

- 6 Installation is complete, turn on power at fuse or circuit breaker. Then turn the flush mount on at the wall switch on and enjoy !
- 7 Clean with a dry, soft cloth only.
Use no harsh abrasives or chemical agents.

220-240V-50Hz E14 Max. 25W

Bulb not included