
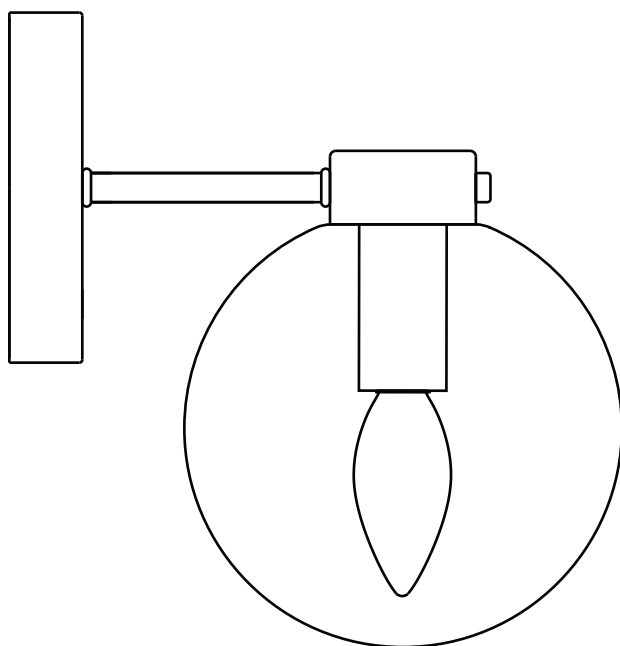


Assembly Instructions







DYLAN WALL SCONCE SET OF 2-BLACK

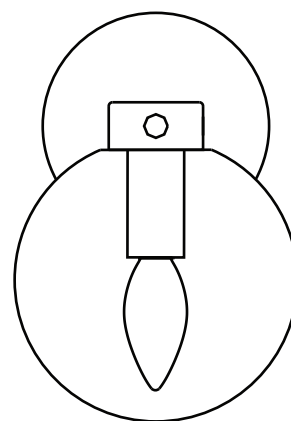

TOPVIEW




Component Checklist

REF	A	B	C	D	E	F
PART						
NAME	Mounting Bracket	Expanding Tubes	Screws	Screws	Base	Glass Globe
QTY	1	2	2	2	1	1

Putting Me Together


WARNING: Switch off the main electrical supply from main fuse box/ circuit breaker before installation

NOTE: We recommend installation of this lightning fixture be done by a licensed electrician.

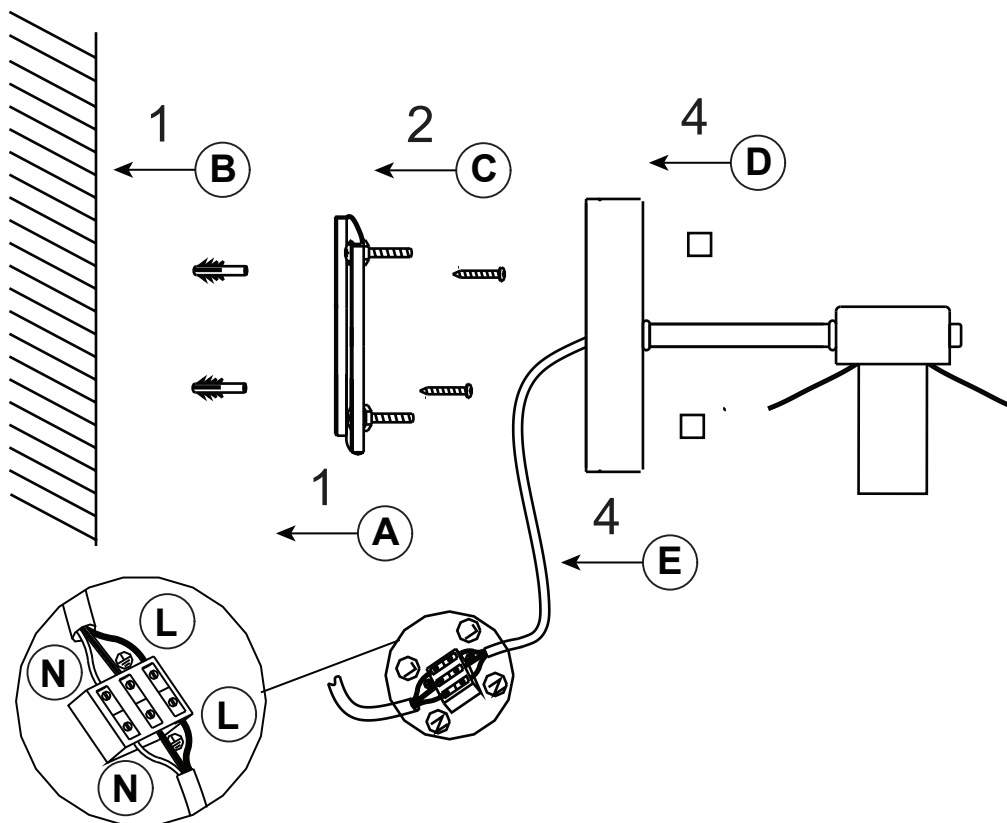

- ① Carefully, remove all parts from the box. Drill holes in the ceiling support beam based on the size of expansion tube (B) and in line with holes in mounting bracket (A).
- ② Insert expansion tubes (B) in the holes in the ceiling support beam, then ceiling support beam with screws (C).
- ③ Connect the 3 power wires from the pendant to the power wires in the ceiling.
Brown is the Live wire
Blue is the Neutral wire
Green/Yellow is the Earth wire
- ④ Attach the lamp body (E) to mounting bracket (A) and secure with screws (D).


Putting Me Together

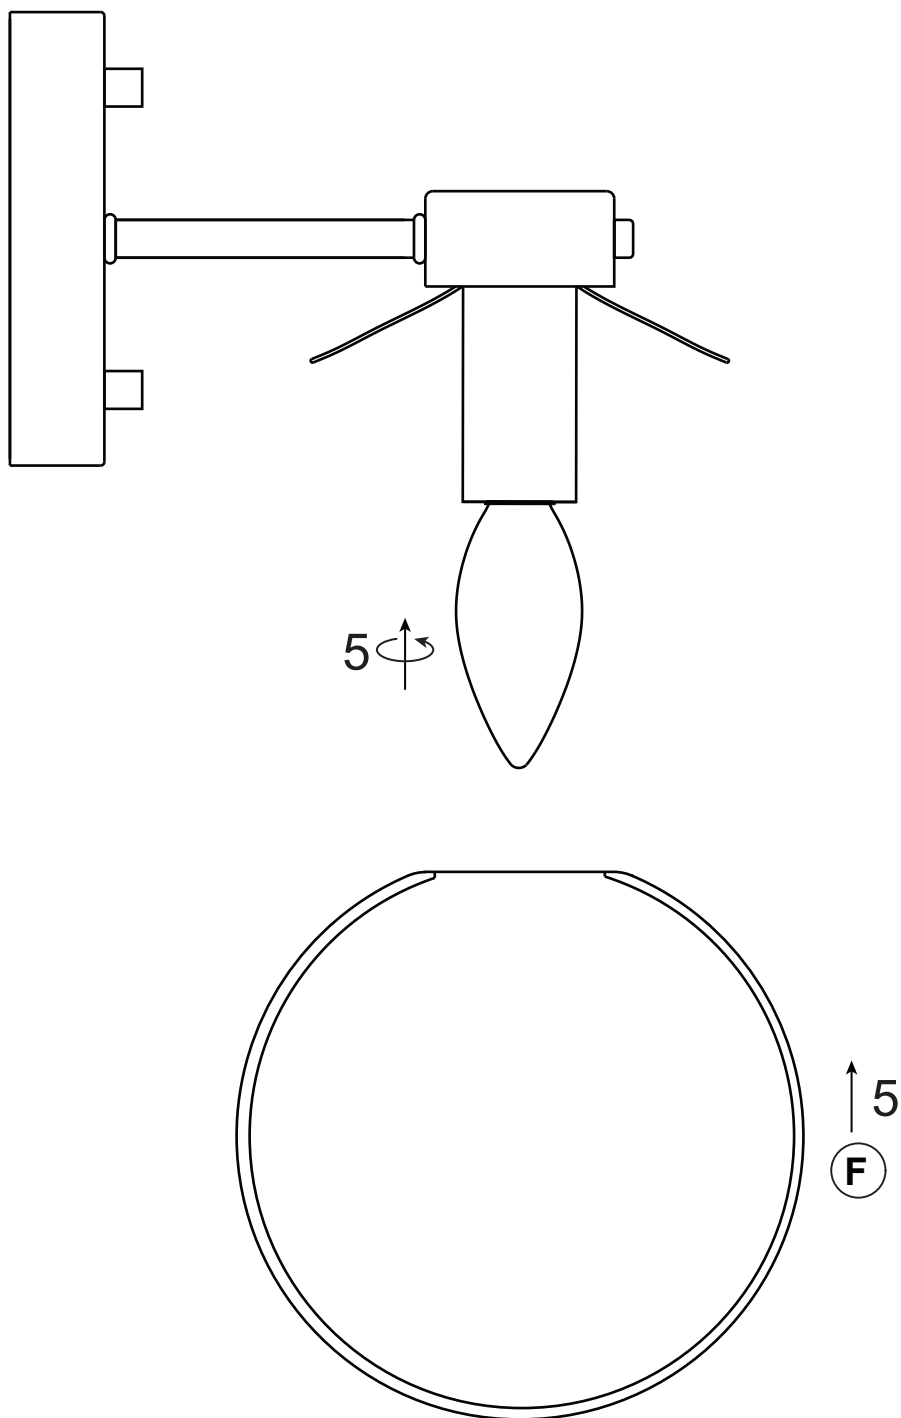

5

Install a light bulb (not included), gently hold the bulb firmly and turn until secured.
Install the glass globes (F) on the sockets from the top to the bottom

Putting Me Together

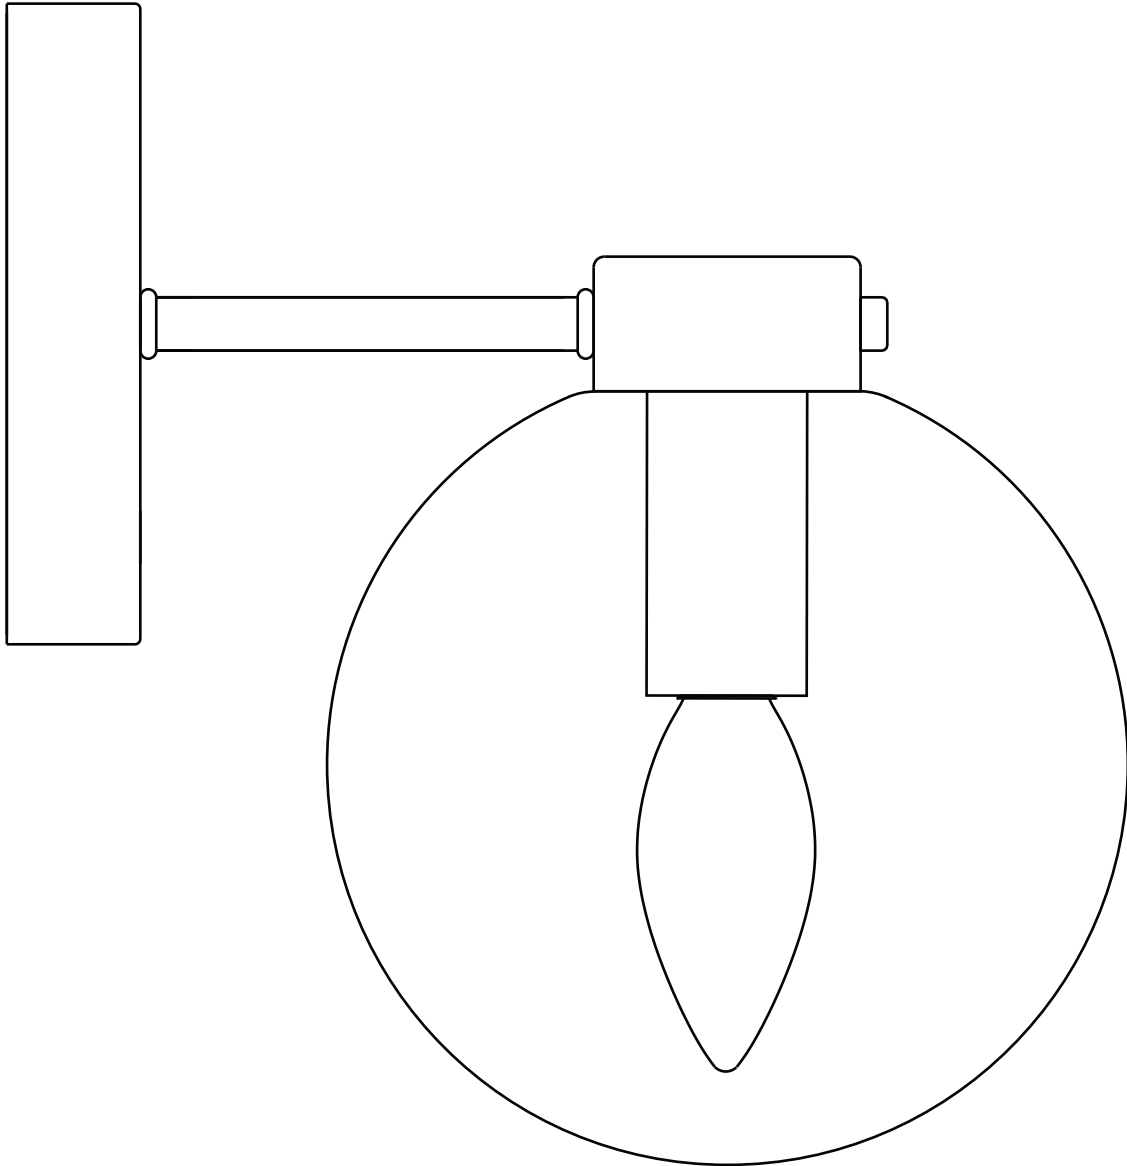

- ⑥ Installation is complete. Turn on power at fuse or circuit breaker, then turn the wall sconce on at the wall switch and enjoy your Dylan wall sconce !
- ⑦ Clean with a dry, soft cloth only.
Use no harsh abrasives or chemical agents.

220-240V-50Hz E14 Max. 40W

Bulb not included