
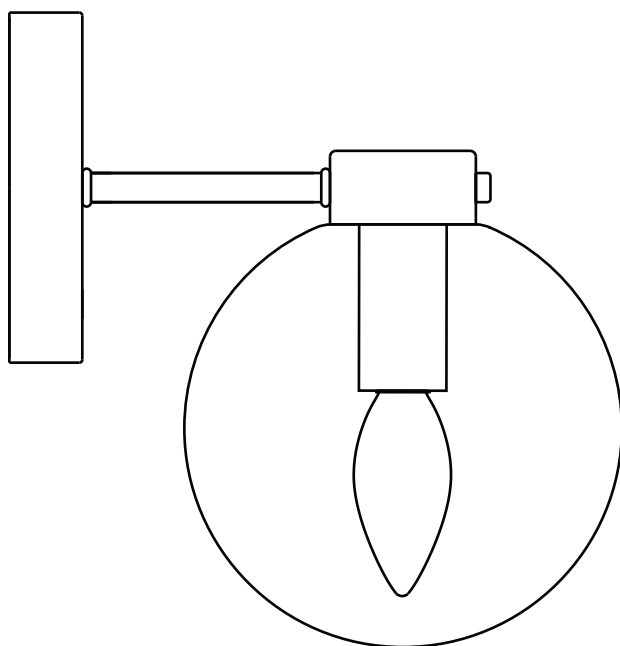


## Assembly Instructions







### DYLAN WALL SCONCE SET OF 2-BRASS

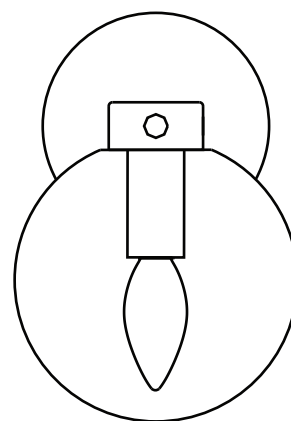

TOPVIEW




### Component Checklist

REF	A	B	C	D	E	F
PART						
NAME	Mounting Bracket	Expanding Tubes	Screws	Screws	Base	Glass Globe
QTY	1	2	2	2	1	1

## Putting Me Together


**WARNING:** Switch off the main electrical supply from main fuse box/ circuit breaker before installation

**NOTE:** We recommend installation of this lightning fixture be done by a licensed electrician.

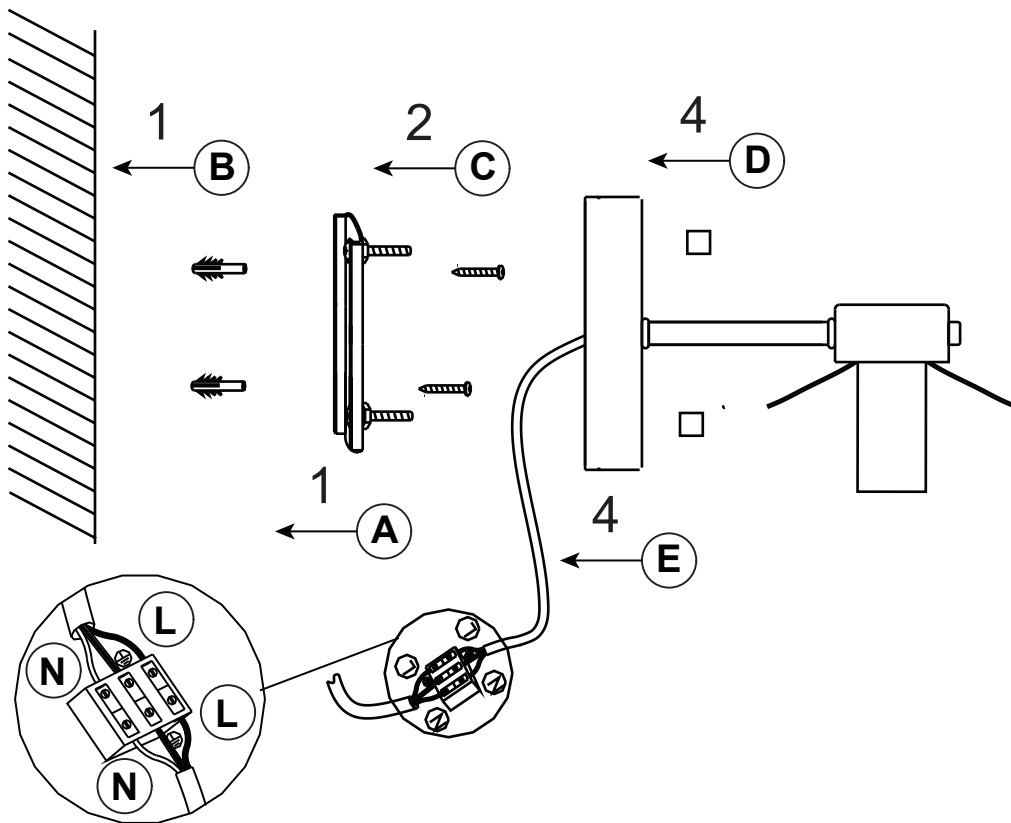

- ① Carefully, remove all parts from the box. Drill holes in the ceiling support beam based on the size of expansion tube (B) and in line with holes in mounting bracket (A).
- ② Insert expansion tubes (B) in the holes in the ceiling support beam, then ceiling support beam with screws (C).
- ③ Connect the 3 power wires from the pendant to the power wires in the ceiling.  
Brown is the Live wire  
Blue is the Neutral wire  
Green/Yellow is the Earth wire
- ④ Attach the lamp body (E) to mounting bracket (A) and secure with screws (D).


## Putting Me Together

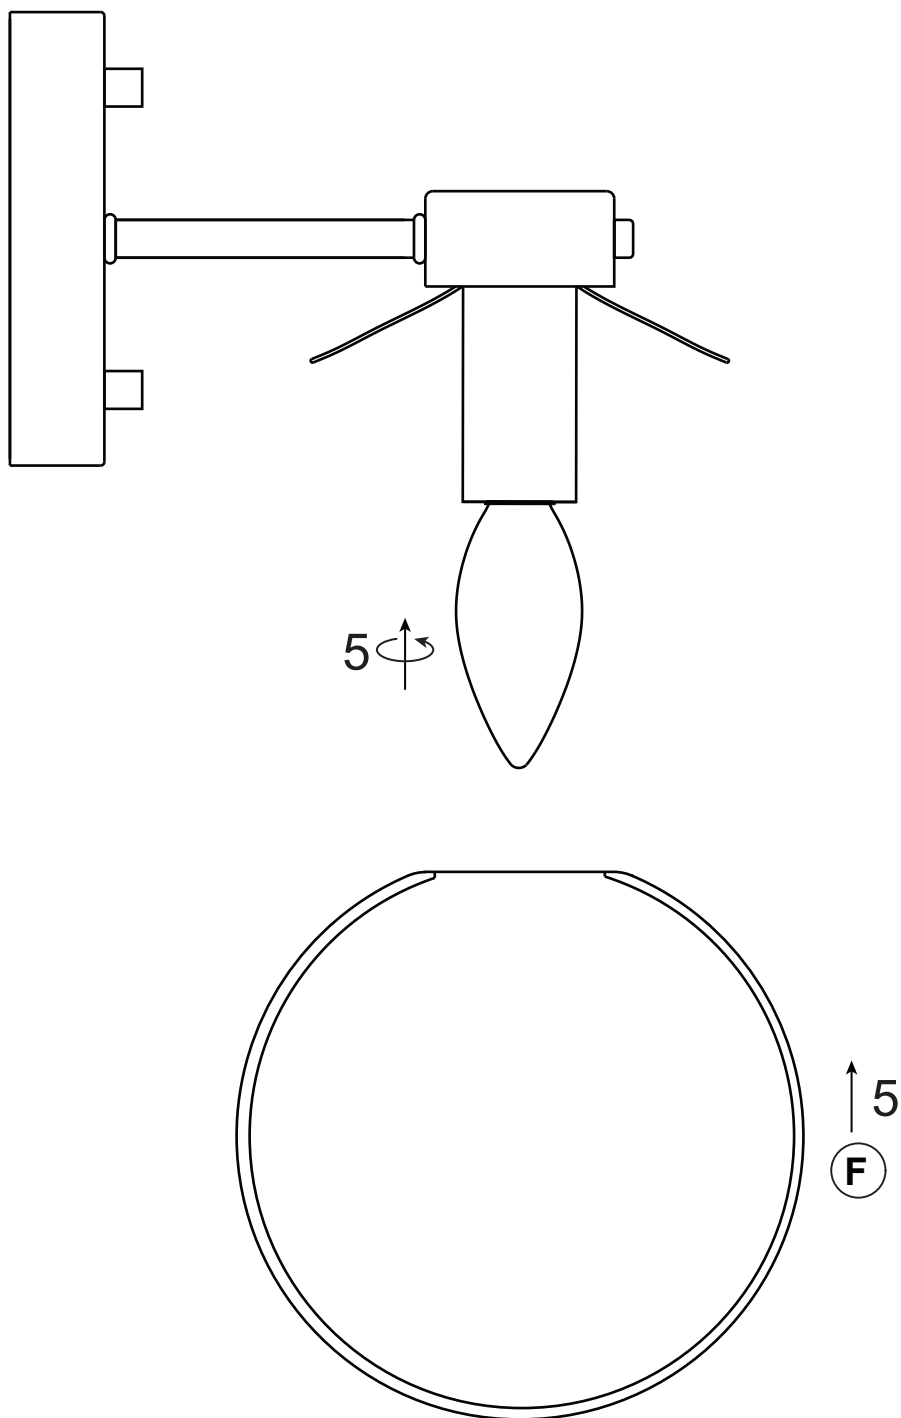

5

Install a light bulb (not included), gently hold the bulb firmly and turn until secured.  
Install the glass globes (F) on the sockets from the top to the bottom

## Putting Me Together

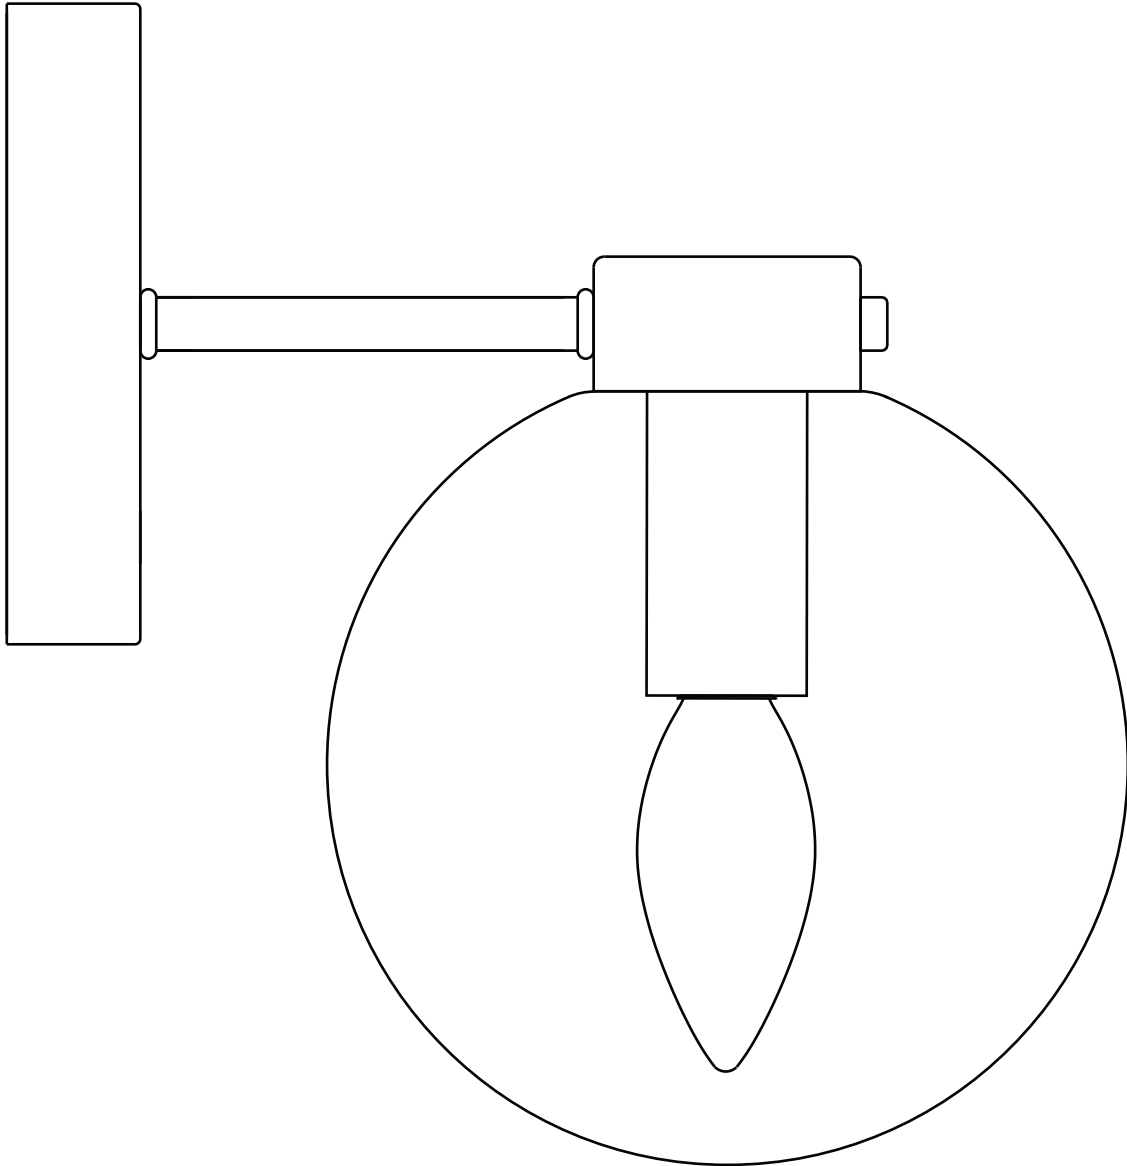

- ⑥ Installation is complete. Turn on power at fuse or circuit breaker, then turn your Dylan wall sconce on at the wall switch and enjoy!
- ⑦ Clean with a dry, soft cloth only.  
Use no harsh abrasives or chemical agents.

220-240V-50Hz E14 Max. 40W

Bulb not included