













Assembly Instructions

HEPBURN CHANDELIER - MEDIUM

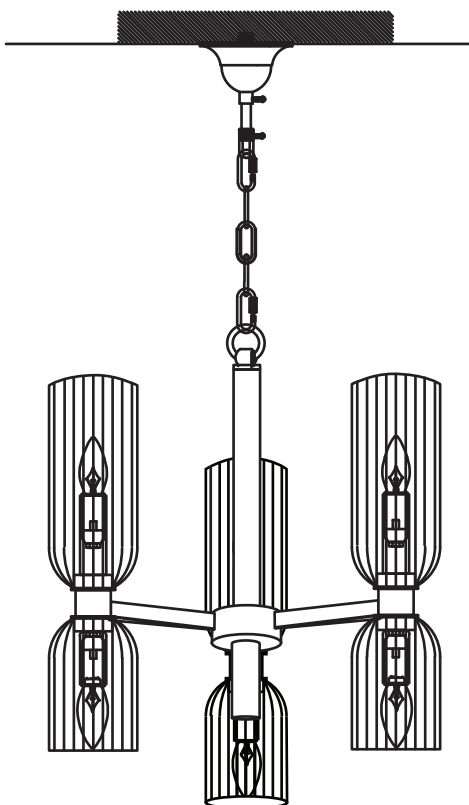


Component Checklist

REF	A	B	C	D	E	F	G	H	I	J	K
PART											
NAME	Expansion Tubes	Screws	Hook	Nut Lock	Brass Canopy	Chain	Lamp Body	Brass Rod with Loop	Brass Rod	Ribbed Glass Shade	Ribbed Glass Shade
QTY	4	4	1	2	1	1	1	1	1	3	3

Putting Me Together


WARNING: Switch off the main electrical supply from main fuse box/ circuit breaker before installation

NOTE: We recommend installation of this lightning fixture be done by a licensed electrician.

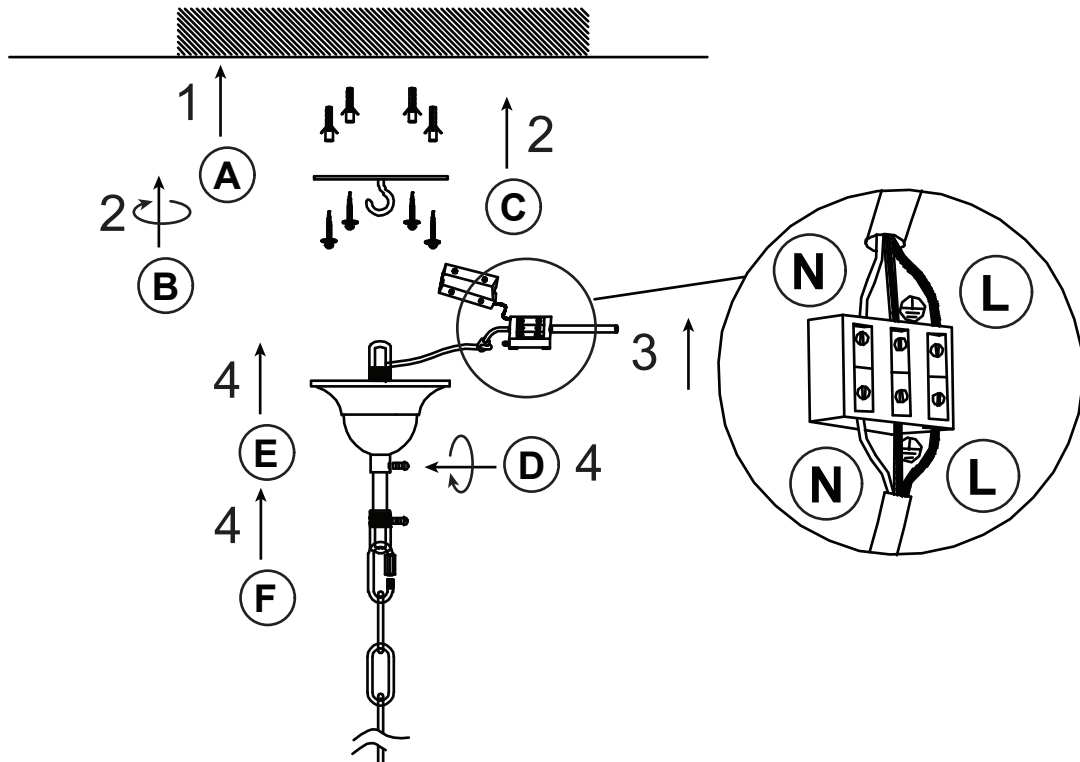


- ① Carefully, remove all parts from the box. Drill holes in the ceiling support beam based on the size of expansion tube (A) and in line with holes in hook (C).
- ② Insert expansion tubes (A) in the holes in the ceiling support beam, then hook (C) with screws (B).
- ③ Connect the 3 power wires from the pendant to the power wires in the ceiling.
Brown is the Live wire
Blue is the Neutral wire
Green/Yellow is the Earth wire
- ④ Attach the brass canopy (E) to hook (C) and secure with nut lock (D).
Attach chain (F) to brass canopy (E), as shown.

Putting Me Together

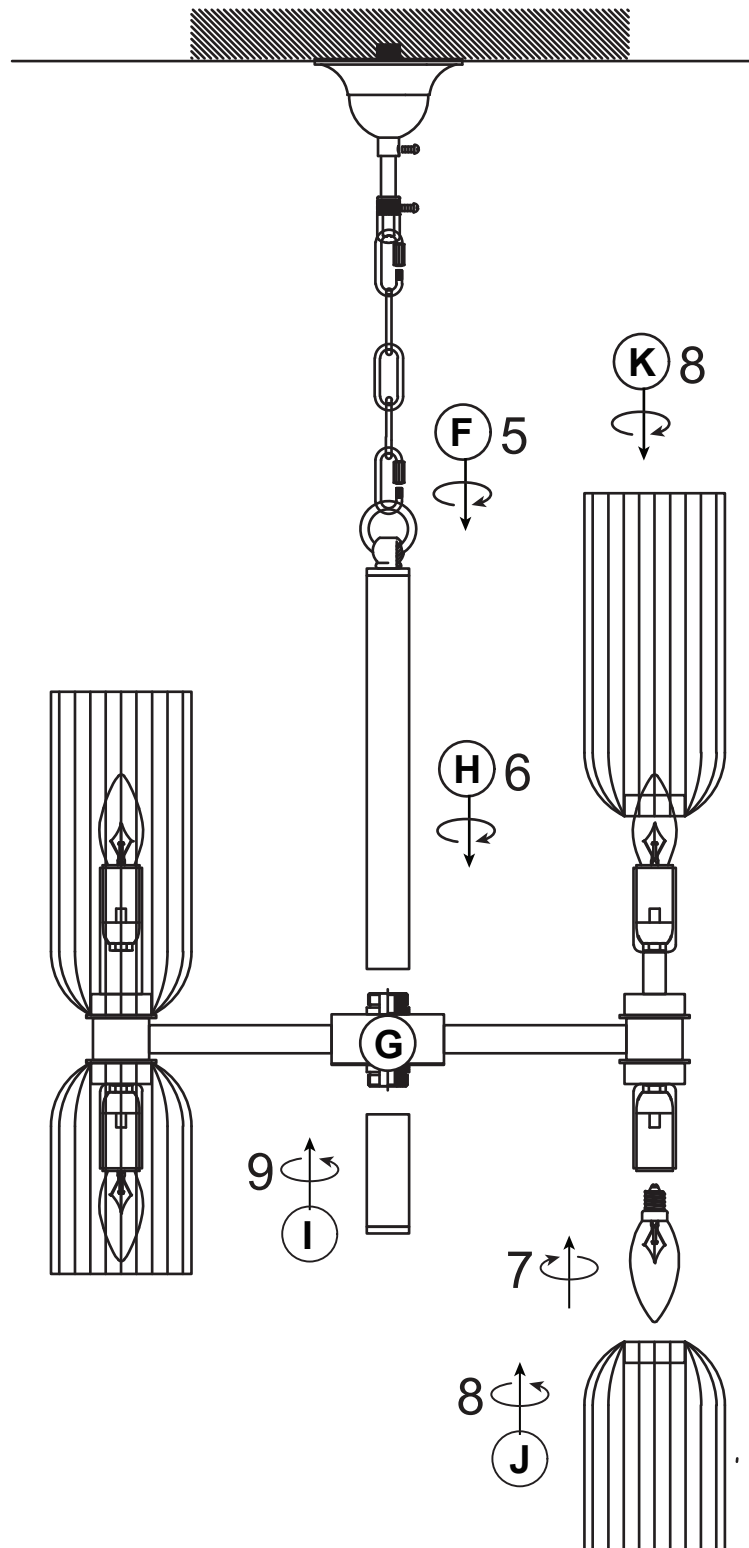

- | | | | |
|---|---|---|---|
| 5 | Fix chain (F) to brass rod with loop (H). | 8 | Fix ribbed glass shade (K) and ribbed glass shade (J) to lamp body (G). |
| 6 | Fix brass rod with loop (H) to lamp body (G). | 9 | Fix brass rod (I) to lamp body (G), as shown. |
| 7 | Install bulb (not included) to lamp body (G). | | |

Putting Me Together

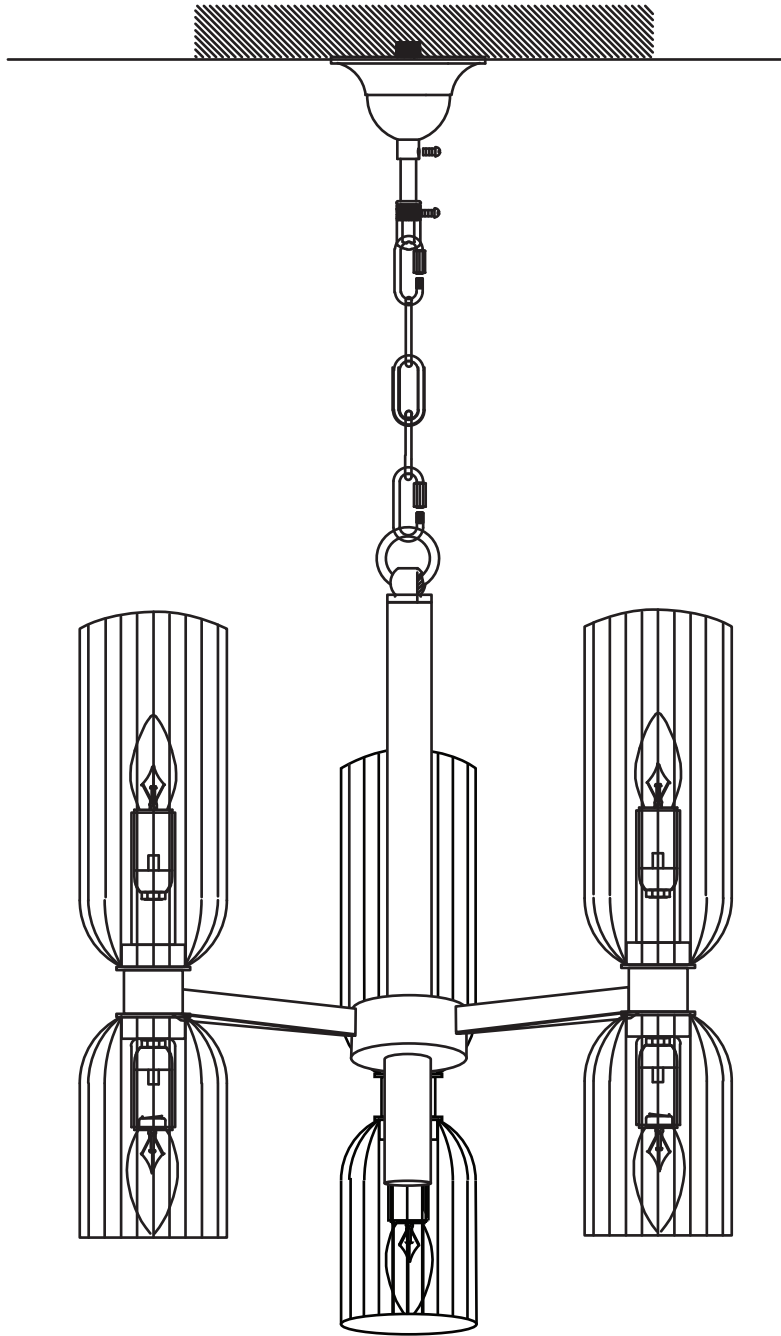

- 10 Installation is complete, turn on power at fuse or circuit breaker. Then turn on the pendant by turning the wall switch on and enjoy your Hepburn Chandelier -Medium!
- 11 Clean with a dry, soft cloth only.
Use no harsh abrasives or chemical agents.

220-240V-50Hz E14 Max. 25W

Bulb not included