


APIS2A

Exterior LED Surface Mounted Up/Down Wall Light




PRODUCT FEATURES

- Exterior LED surface mounted up/down wall light
- Input voltage range: 220-240V AC 50/60Hz
- Housing: Powder coated aluminium
- Diffuser & mounting place: PC
- Ambient temperature: -20 to 50°C
- Power factor: >0.8
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

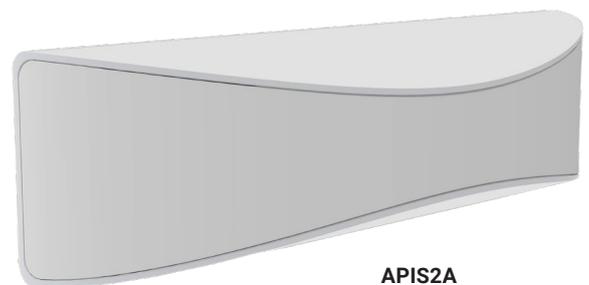

APIS2A

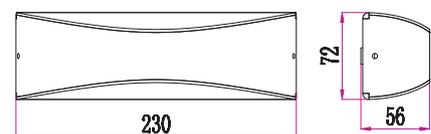

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	WEIGHT (KG)	BOX SIZE (CM)	CARTON QTY
APIS2A	WALL LED S/M Matt WH Curved UP/Dn	3000	350	7	>80	0.5	24x9x7	1/8

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)

*To avoid disappointment and warranty problems, please ensure the IP rating of the chosen product is relevant for the intended use. To maintain the IP rating, mounting screws and cable entries should be sealed with a suitable sealant.