

DECO-TILT-TRIO

Tiltable LED Downlight



Description

The DECO range of LED downlights have been designed with a deep-set frame to reduce glare from the light source. Featuring a wide light distribution, and with an ultra slim housing, allows for this downlight to be suitable for installations where ceiling space is minimal. Complete with a dimmable LED driver and flex and plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




Specification Features


Input Voltage:	240V AC
Power (W):	13W
IP rating (IP):	44*
Lumens (lm):	Warm White 3000K - 1186lm Neutral White - 4000K - 1306lm White 5700K - 1237lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥80
Beam angle (°):	90°
Dimmable:	Yes**
Lifespan (hrs):	50,000hrs
Cutout (p):	Ø95mm

* IP44 rating is from the underside of the down light once installed into the ceiling.

** Fully dimmable with suitable dimmers.



Diagrams / Additional

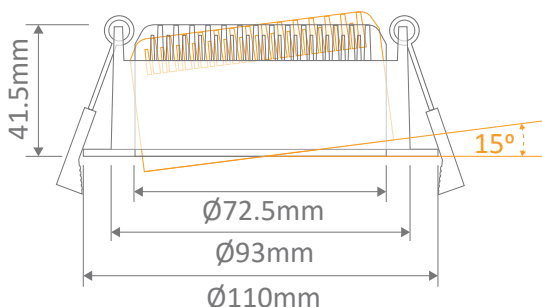

Cutout: Ø95mm

Item No.	Variant	Colour Temp
DECO-TILT-WHT	20430	TRIO
DECO-TILT-BLK	21045	