

24Volt DC

Specification

Item Name	ESLEN PT	ESLEN SP
Input Voltage	24V ~ 50Hz	
Watt / Lumen	3w / 180Lm	
CCT	3000K	
CRI	>90	
Dimmable	NON-DIMMABLE	
Beam Angle	38°	
Dimensions (mm)	W:38 x L:235 H:600	D:38 H:165
Cable Length (mm)	100	
Stake Height (mm)	400	212

Accessories

The following components are offered to facilitate installation and/or meet warranty requirements.




Transformer 60W 24V
IP68
C TR060.24V IP68



Transformer 200W 24V
IP68
C TR200.24V IP68



Waterproof Heat Shrink
End Caps Size 14/5
HTSHRINK CAP-12

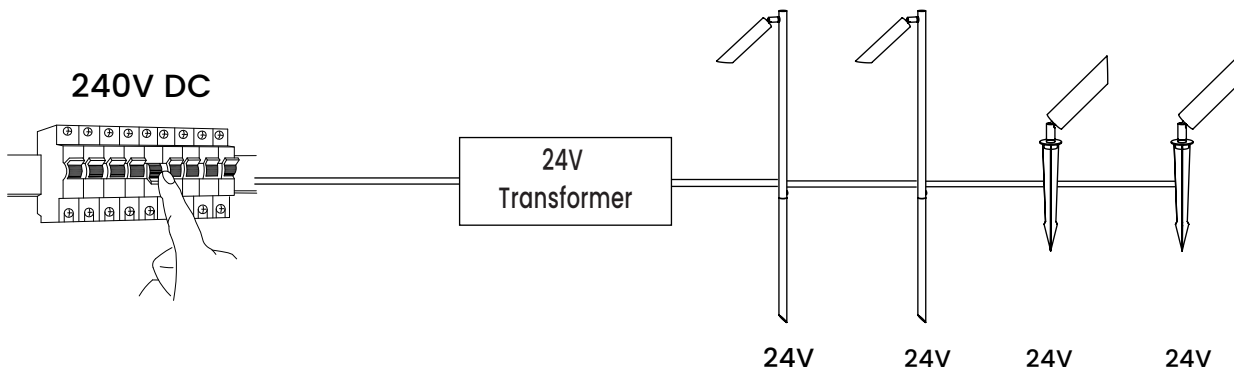

IP65




NON-DIMMABLE




Installation must be performed by a qualified Electrical Contractor in accordance with the current wiring standard AS/NZS3000.
3 YEAR REPLACEMENT WARRANTY*
with Proof of purchase and electrical installation certificate.

Contact Us: sales@telbix.com


FITTING INSTALLATION INSTRUCTIONS – CONNECTION

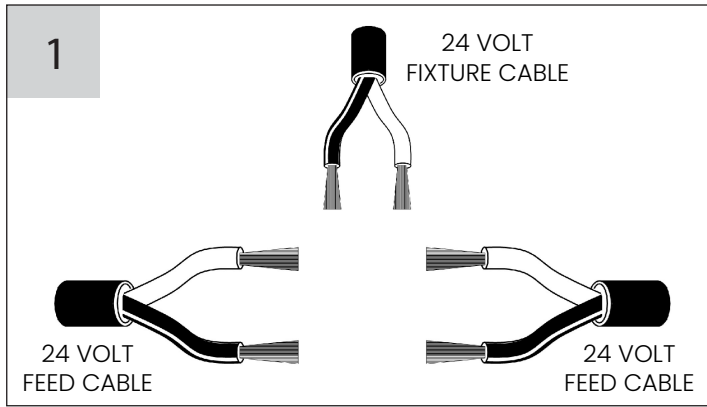

- Expose the copper strands by stripping away the PVC insulation from the feed cables.
- Spread out the exposed copper strands and securely twist the red fixture wire with the red feed cable and repeat for black cables.

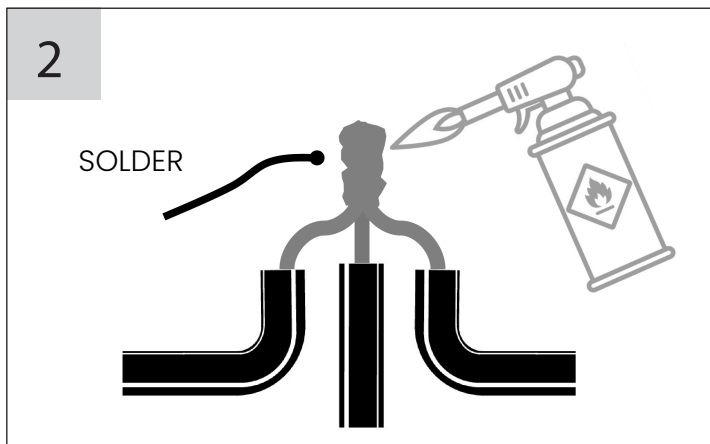

- Heat the twisted copper wires using a butane torch.
- Apply solder until it fully saturates all wire strands. Let the joint cool, then trim excess solder with side cutters. Once cooled, trim the excess solder with side cutters and remove any sharp edges. Repeat for the other cable join.

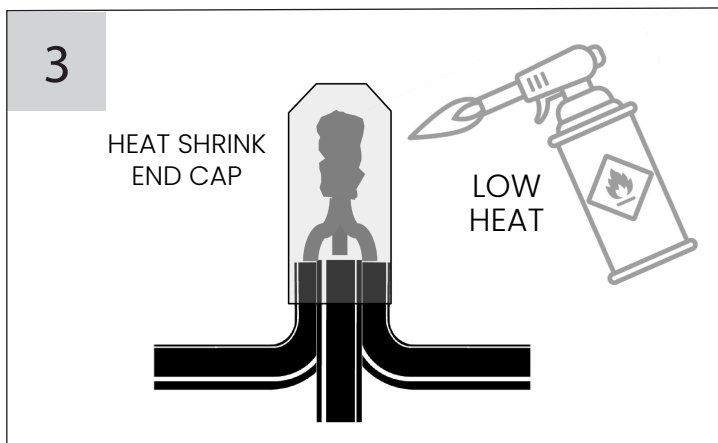

- Slide the heat shrink end cap over the soldered joint.
- Ensure at least 1/3 (minimum) of the cap's length overlaps the existing PVC insulation.
- Apply heat evenly and gently to the cap until it contracts around the joint.
- Confirm that the adhesive is visible at the base of the cap, indicating a proper seal.