



Item Name: FLANK PT3

ATTENTION:


DO NOT WIRE
FIXTURE DIRECTLY
TO 240V MAINS.




01 Turn mains power OFF.

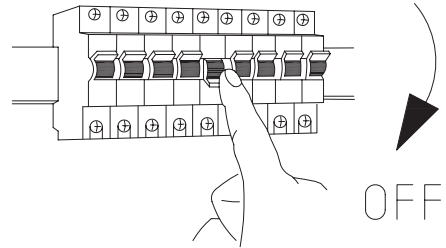


02 Screw the fitting with spike and insert to the ground.

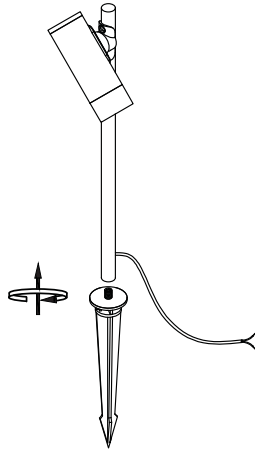

03 Connect the fitting wire to a driver.

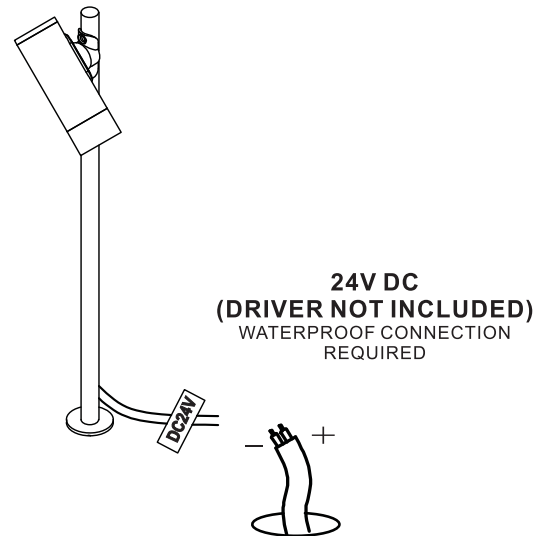

04 Turn mains power ON.

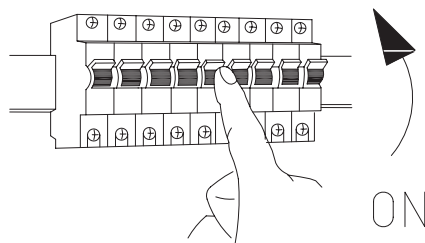

Accessories

The following components are offered to facilitate installation and/or meet warranty requirements.



Transformer 60W 24V
IP68
C TR060.24V IP68



Transformer 60W 24V
IP68
C TR060.24V IP68



Waterproof Heat Shrink
End Caps Size 14/5
HTSHRINK CAP-12




Telbix.

24V ~ 50Hz LED
3W 3000K Non-DIM


IMPORTANT

Must be installed by a
qualified electrical
contractor.
Install in accordance
with AS/NZS3000.


FITTING INSTALLATION INSTRUCTIONS – CONNECTION

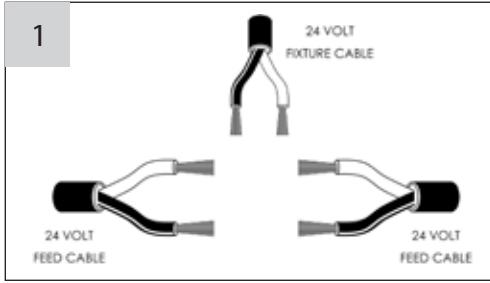

- Expose the copper strands by stripping away the PVC insulation from the feed cables.
- Spread out the exposed copper strands and securely twist the red fixture wire with the red feed cable and repeat for black cables.

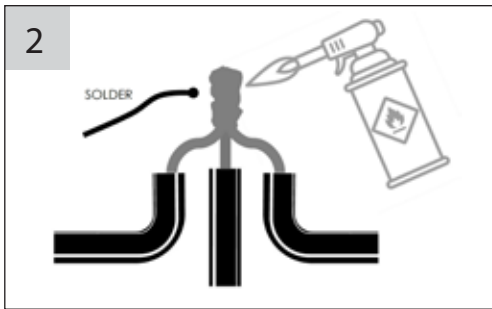

- Heat the twisted copper wires using a butane torch.
- Apply solder until it fully saturates all wire strands. Let the joint cool, then trim excess solder with side cutters. Once cooled, trim the excess solder with side cutters and remove any sharp edges. Repeat for the other cable joint.

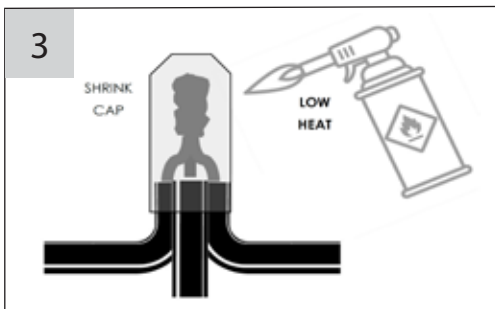

- Slide the heat shrink end cap over the soldered joint.
- Ensure at least 1/3 (minimum) of the cap's length overlaps the existing PVC insulation.
- Apply heat evenly and gently to the cap until it contracts around the joint.
- Confirm that the adhesive is visible at the base of the cap, indicating a proper seal.

* Adhesive Lined End Cap can be purchase through Telbix. Caps should be at least 1/3 larger than the join.