

Hydro 120 EM Temp Emergency Temporary LED Batten



Description

The HYDRO LED TEMPORARY Weatherproof Batten series is a direct replacement to traditional T8 and T5 Fluorescent battens, designed as a cost-effective solution for temporary lighting on construction sites. Custom designed to colour match concrete ceilings, and incorporating a "quick fix" solution to allow for ease and speed of installation. Constructed from high-quality and high impact resistant polycarbonate, with a high transparency frosted polycarbonate diffuser. Available in 1200mm lengths, with a Neutral White 4000K colour temperature light output. Suitable for domestic applications such as underground basements, garages, and outdoor areas. Also, commercially for underground car parks, and construction site temporary lighting. Attached Stainless Steel clips for durable and fast installation. Available as standard or with Emergency lighting option. Backed by a 3 Year Warranty.



Specification Features

Input Voltage:	240V AC
Power (W):	40W
IP rating (IP):	IP66
IK Rating (IK):	IK08
Lumens (lm):	Neutral White 4000K - 4800lm
LED type:	SMD
CCT:	4000K
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No
Lifespan (hrs):	50,000hrs
Application:	Surface mounted or suspended
Operating Temperature:	0° to 45°



Supplied with a 1-meter, 3-pin flex and plug.

ESCAPE
Emergency Systems

Emergency Specification Features

Compliance:	Fully compliant to AS/NZS 2293
Battery:	LiFePO4 battery type, 6.4V, 7 Hour Charging Time, 1.5 Hours Discharging Time
Battery Capacity:	1500 mAh at 0.2 CmA
Emergency:	Non Maintained / Maintained
Rated Duration:	120 Min
Classification:	C0: D50, C90: D32

Diagrams / Additional

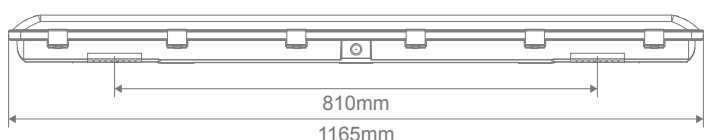

Item No.	Variant	CCT
HYDRO-120-EM-TEMP	66182	4000K