

HYDRO-60-EM

Emergency LED Batten



Description

The HYDRO LED Weatherproof Batten series is a direct replacement to traditional T8 and T5 Fluorescent battens. Custom designed to colour match concrete ceilings, and incorporating a "quick fix" solution to allow for ease and speed of installation. Constructed from high-quality and high impact resistant polycarbonate, with a high transparency frosted polycarbonate diffuser. Available in 600mm and 1200mm lengths, as well as Tricolour switchable: choose between Warm White 3000K, Neutral White 4000K, or White 5000K colour temperatures with the flick of a dip switch. Suitable for domestic applications such as underground basements, garages, and outdoor areas. Also commercially for underground car parks. Choose between supplied grey plastic clips or attached Stainless Steel clips depending on your installation preference.

Specification Features

Input Voltage:	240V
Power (W):	7.5W-15W (Switchable)
IP rating (IP):	IP65
LED type:	SMD
CCT:	3000K - 4000K - 5000K (Switchable)
Lumens (lm):	7.5W 15W
	Warm White 3000K - 950lm Warm White 3000K - 1850lm
	Neutral White 4000K - 980lm Neutral White 4000K - 1900lm
	White 5000K - 950lm White 5000K - 1850lm
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No
Lifespan (hrs):	50,000hrs
Installation:	Surface mounted or suspended



Emergency Specification Features


Compliance:	Fully complaint to AS/NZS 2293 standards
Battery:	LiFePO4 battery type, 6.4V, 7 Hour Charging Time, 1.5 Hours Discharging Time
Battery Capacity:	1500 mAh at 0.2 CmA
Emergency:	Non Maintained / Maintained
Rated Duration:	120 Min
Classification:	C0: D50, C90: D32

ESCAPE
Emergency Systems

Item No.	Variant			CCT
	Non-Dim	On/Off Sensor*	Dim Sensor*	
HYDRO-60-EM	66020	66030	66031	TRIO
SENSOR-INT-01-REM	N/A	66090	66091	N/A

*Remote Control Required

Diagrams / Additional

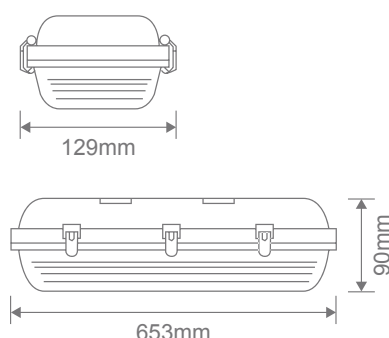

Internal ON/Off Sensor



Dimmable Sensor