



# SURFACETRI


## LED Dimmable Surface Mounted Oyster Lights

TRI-CCT 3000K 4000K 5000K


- Input voltage range: 220-240V
- Inbuilt constant current driver included
- Housing & faceplate: PC
- Diffuser: white PS
- Mounting bracket: aluminium
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- CCT switch on DC cable
- LED chips: SMD2835
- Power factor: 0.9
- CRI: ≥80
- Flex & plug not included
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with motion or Microwave sensors




**SURFACETRI1R**

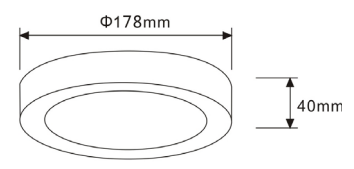


**SURFACETRI2R**



**SURFACETRI3R**



**SURFACETRI1S**



**SURFACETRI3S**



### Tested & Recommended Dimmers:

BRAND	PART NO.	PCS PER DIMMER
CLA	VELA	
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDDM-WE, 32E450TM, PDL354PBDMUN-VW	SURFACETRI1R: 2-14PCS SURFACETRI2R: 2-8PCS SURFACETRI3R: 2-5PCS SURFACETRI1S: 2-14PCS SURFACETRI3S: 2-5PCS
HPM	Cat 250T, Cat 400T	
Diginet	MEDM, MMDM/RT	

PART NO.	DESCRIPTION	LUMENS (LM)			WATT (W)	CRI	BOX WEIGHT (kg)	BOX DIMENSIONS (cm)	CARTON QTY
		3000K	4000K	5000K					
<b>SURFACETRI1R</b>	OYSTER DIMM LED S/M WH RND TRI	420	480	450	6	≥80	0.25	13x5x13	1/40
<b>SURFACETRI2R</b>	OYSTER DIMM LED S/M WH RND TRI	840	960	900	12	≥80	0.4	19x5x19	1/40
<b>SURFACETRI3R</b>	OYSTER DIMM LED S/M WH RND TRI	1350	1550	1450	18	≥80	0.56	23.5x5x23.5	1/20
<b>SURFACETRI1S</b>	OYSTER DIMM LED S/M WH SQ TRI	420	480	450	6	≥80	0.27	13x5x13	1/40
<b>SURFACETRI3S</b>	OYSTER DIMM LED S/M WH SQ TRI	1350	1550	1450	18	≥80	0.66	23.5x5x23.5	1/20