

Last modification 2023-05-16

MACRO DL105-BK3C
9329501063774



The MACRO 105 downlight has been specifically designed for today's domestic living spaces. The color temperature of light can be customized to warm, natural or cool via an integrated slide switch on the fixture, and triac dimming is fully supported. Maximum lux is achieved via the custom lens which is deep set offering a low glare light source. Installation is simple with the fixture ready to plug into existing sockets.

Overview

Family name	Macro
Categories	Downlights
Mounting	Recess
This item includes	Driver
Usage	Indoor Lighting, Trade Selection
ERAC Product Registration	GMA-515382

Color / Material

Fixture Color	Black
Fixture Material	Polycarbonate, Plastic
Diffuser Color	Clear
Diffuser Material	Plastic
Cable Color	Black
Cable Material	PVC

Size

Fixture Diameter (cm)	10.5
Fixture Height (cm)	7.0
Cut Out	9

Specification

Voltage Input	240V
Wattage (max)	9
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes


All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Lumens	800
Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4000k - 5000k)
Color Rendering	>80
Dimmable	Yes - TRIAC
UGR	<19
Beam Angle (degree)	60
Insulation class	IC-4
IP rating	IP44
Lead and Plug	Yes
Approvals	RCM
Assembly Required	No
Box Contents	Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners, Wipe clean with a dry cloth
Replacement Warranty	*5 Years

Barcode

GTIN 9329501063774

Image -dimensions

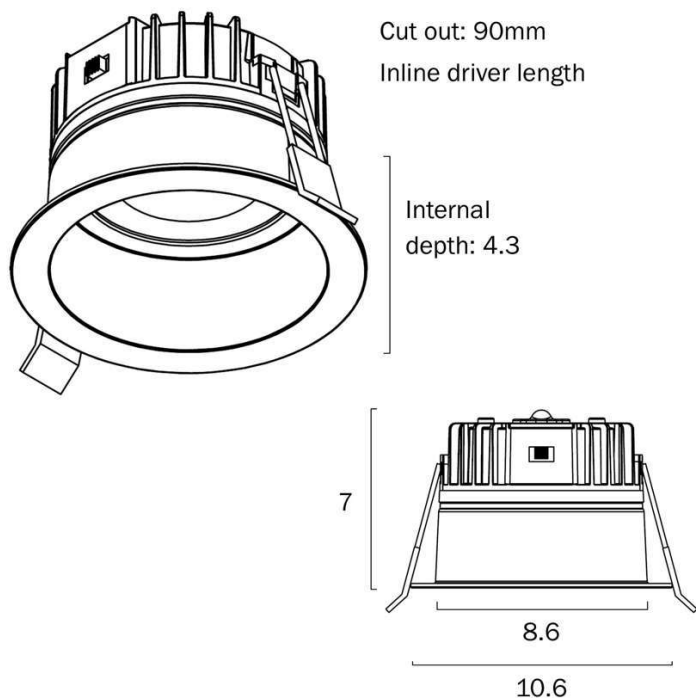

Note: Dimensions are only a guide and may vary due to manufacturing variations.

Frequently asked questions

- Heat sink is aluminium built in PBT, trim is PA, Lens is PC.
- Not flicker free



Last modification

2023-05-16

MACRO DL105-WH3C 9329501063781



The MACRO 105 downlight has been specifically designed for today's domestic living spaces. The color temperature of light can be customized to warm, natural or cool via an integrated slide switch on the fixture, and triac dimming is fully supported. Maximum lux is achieved via the custom lens which is deep set offering a low glare light source. Installation is simple with the fixture ready to plug into existing sockets.

Overview

Family name	Macro
Categories	Downlights
Mounting	Recess
This item includes	Driver
Usage	Indoor Lighting, Trade Selection
ERAC Product Registration	GMA-515382

Color / Material

Fixture Color	White
Fixture Material	Polycarbonate, Plastic
Diffuser Color	Clear
Diffuser Material	Plastic
Cable Color	Black
Cable Material	PVC

Size

Fixture Diameter (cm)	10.5
Fixture Height (cm)	7.0
Cut Out	9

Specification

Voltage Input	240V
Wattage (max)	9
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes


All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Lumens	800
Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4000k - 5000k)
Color Rendering	>80
Dimmable	Yes - TRIAC
UGR	<19
Beam Angle (degree)	60
Insulation class	IC-4
IP rating	IP44
Lead and Plug	Yes
Approvals	RCM
Assembly Required	No
Box Contents	Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners, Wipe clean with a dry cloth
Replacement Warranty	*5 Years

Barcode

GTIN 9329501063781

Image -dimensions

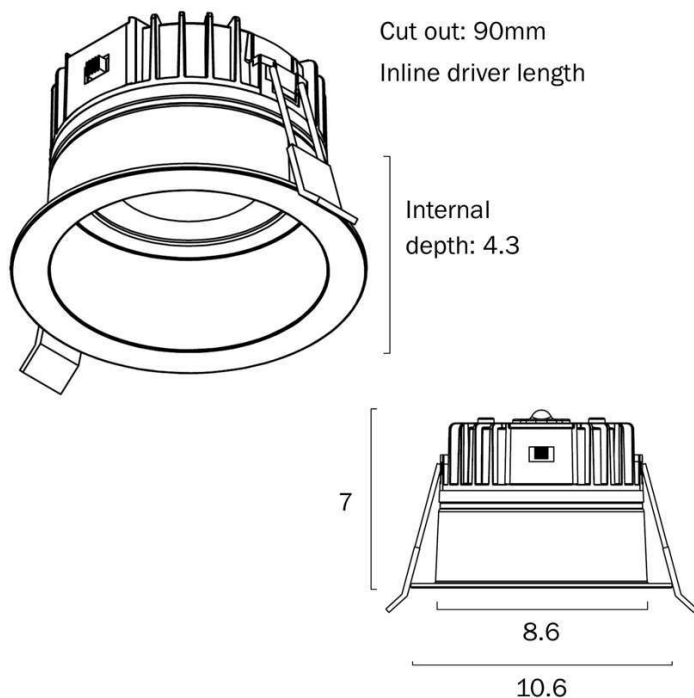

Note: Dimensions are only a guide and may vary due to manufacturing variations.

Frequently asked questions

- Heat sink is aluminium built in PBT, trim is PA, Lens is PC.
- Not flicker free

