



LIGHTING THAT OUTPERFORMS


SINCE 1998

STEALTH

The Stealth is a hybrid of elegance and flexibility, which is available in track or surface mounted version. It is available with LED 15W LED module, and the deep baffle enables to build the LED module deeply into the fitting to achieve a high level of visual comfort. The upper and lower body can be moved and angled in very dynamic and fluid way. The luminaire head can rotated up to 90° for multiple installation requirements. Innovation thermal design to incorporate pure aluminum body as heatsink and air convection cooling guarantees LED's stable performance and long lifespan.

PRODUCT SPECIFICATIONS

Installation	New
Finish	Matte Black /Matte White
Material	AL-PC-PMMA
Diffuser Type	Polycarbonate
Wattage	15W
Voltage	240V AC 50Hz
Dimming	Trailing Edge/Universal
LED	COB
Colour Temp	3000K, 4000K, 5500K
CRI	>90
Lumen	900lm / 980lm / 940lm
Beam Angle	60°
Rotation	90°
IP Rating	IP20
Warranty	3 Years

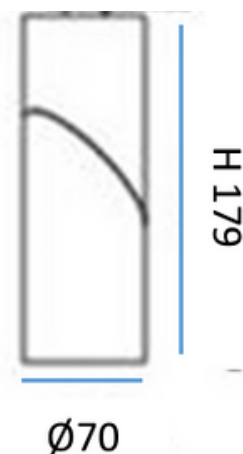

ORDERING CODE



USMB15ADJ-BLK-3CCT



USMB15ADJ-WH-3CCT

UGE ACCESSORIES

DESCRIPTION	MODEL NUMBER	IMAGE
24° Lens	UTRKB15ADJ-LENS-24	
Gold Baffle	UTRKB15ADJ-BAFFLE-GD	
LED Push Button DIMMER	UDIMMER-350	