
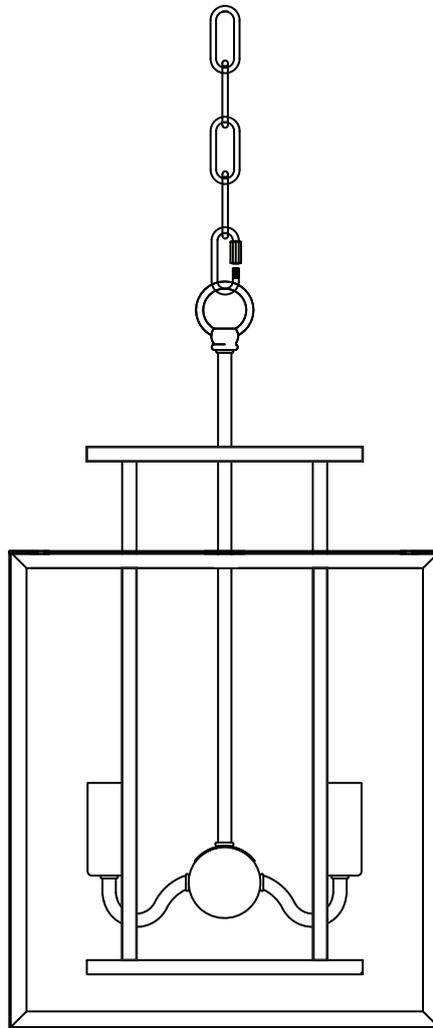


*Assembly Instructions*


CONCORD PENDANT - SMALL



**Component Checklist**

REF	A	B	C	D	E	F	G	H
PART								
NAME	Ceiling Plug	Ceiling Screw	Ceiling Hook	Glass Pane	Washer	Knob	Pendant Frame	Chain + Ceiling Cup
QTY	4	4	1	4	8	4	1	1

# Putting Me Together

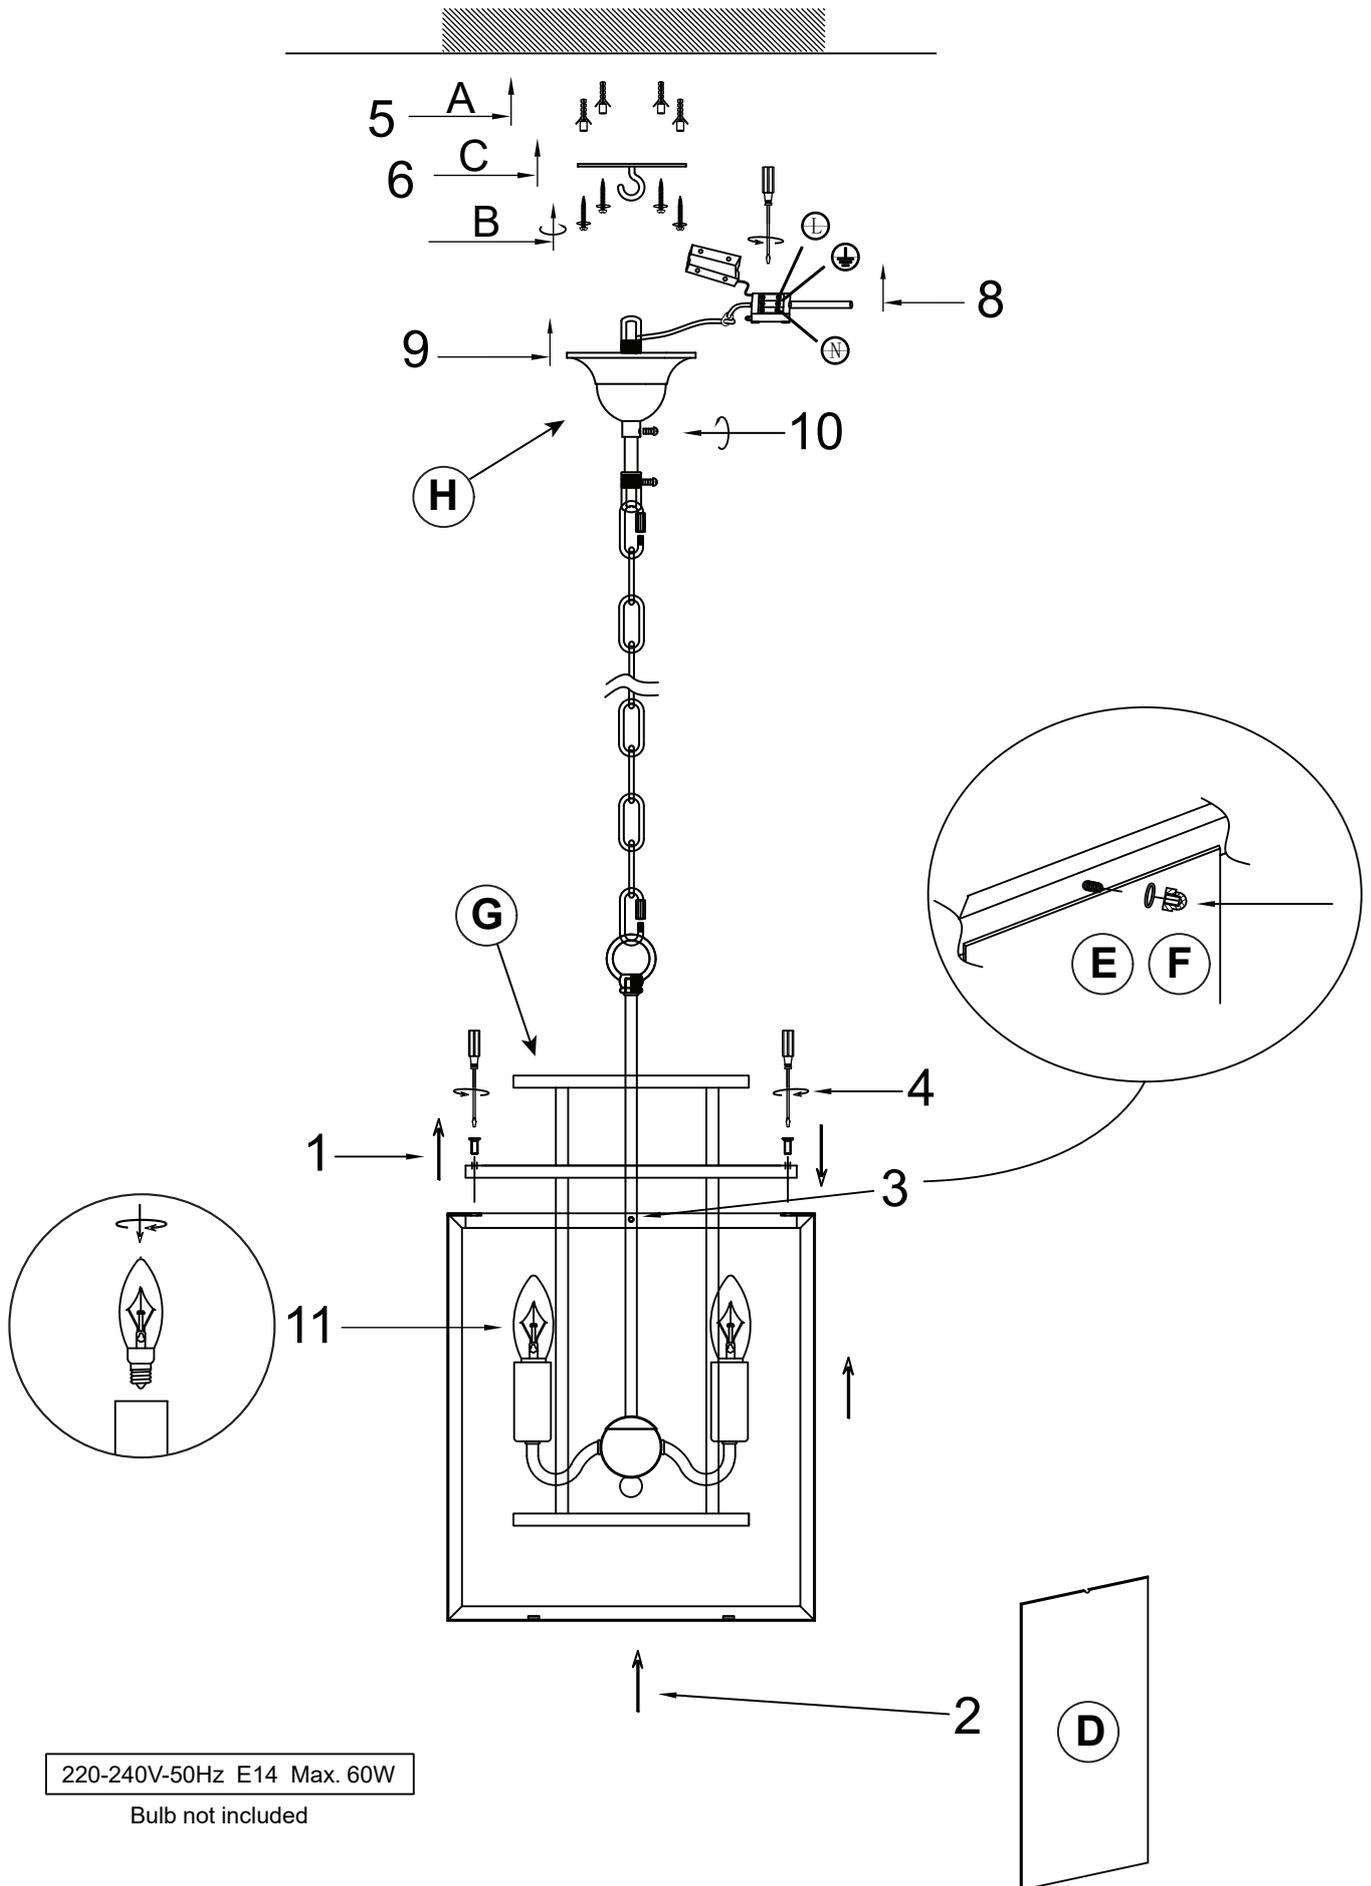



**NOTE: THIS ITEM MUST BE INSTALLED BY A LICENSED ELECTRICIAN**

**WARNING:** Switch off the main electrical supply at the main fuse box / circuit breaker before installation.

- ① Carefully remove all the parts from the box.  
Place pendant frame (G) on a level surface and proceed to remove the screws from the top corners of the pendant frame.
- ② Remove the centre frame from the outer frame of the pendant.
  - Insert washer (E) on the screws on each side of the outer frame.
  - attached the glass planes (D) inside each side of the outer frame.
- ③ Secure each glass plane with another washer (E) and screw on knob (F).
- ④ Re-insert the centre frame into the outer frame, then secure it by screwing back in the screws you removed in step #2.
- ⑤ Due to its weight, this pendant must be installed to a support beam in the ceiling.
  - Drill holes into the ceiling support beam according to the size of Ceiling Hook screws (B) and in line with holes in Ceiling Hook (C).
  - Insert ceiling plugs (A) into the holes in ceiling support beam.
- ⑥ Fix Ceiling Hook (C) to the ceiling support beam using Ceiling Hook screws (B).
- ⑦ **ENSURE THE ELECTRICITY SUPPLY IS TURNED OFF.**
- ⑧ Connect the 3 power wires from the pendant to the power wires in the ceiling.
  - Brown is the Live wire.
  - Blue is the Neutral wire.
  - Green/Yellow is the Earth wire.
- ⑨ Attached the pendant ceiling cap (H) to the Ceiling Hook (C).
- ⑩ Tighten the grub screw just below the ceiling cap.
- ⑪ Insert E14 globes into each lamp holder screwing in until they are firm (globes not included).
- ⑫ Turn the electricity supply back on and enjoy!